



# Air-Flo Plus

125mm Framing

**DESIGNED TO INTEGRATE SINGLE AND DOUBLE  
GLAZED FRAMING WITH A FRENCH/HINGE  
DOOR PANEL**

1300 ALSPEC (1300 257 732)

[alspec.com.au](http://alspec.com.au)

**alspec**  
ALUMINIUM SYSTEMS  
SPECIALISTS

## Air-Flo Plus 125mm Framing

The Air-Flo® Plus 125mm Framing system is purposely designed to provide a total solution for all residential and commercial applications, including fixed lights and hinged doors.

The Air-Flo® Plus 125mm Framing French Door from Alspec® is a 40mm wide panel consisting of a 85mm face as standard. An integrated barrier/security door rebate allows for an overall frame size of 125mm.




Also integrable with the Swan Evo or Torrens 45mm commercial panel to cater for larger panel sizes.

Suited towards the suburban housing and multi-unit residential market, the Air-Flo® Plus 125mm Framing system caters for timber reveals, various coupling, 4 point locking, screening solutions and a full range of glazing options up to 25mm double glazed.

Successfully tested for compliance with Australian Standards AS2047, achieving high acoustic and WERS energy ratings.

Specifying Alspec's Air-Flo® Plus 125mm Framing ensures the client receives a solid, durable high performance product.

### Typical Configuration

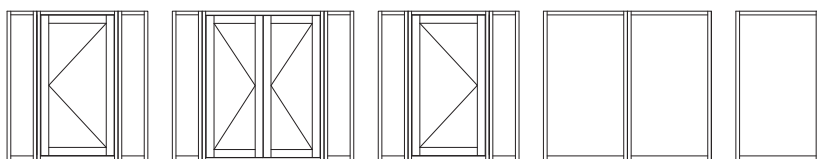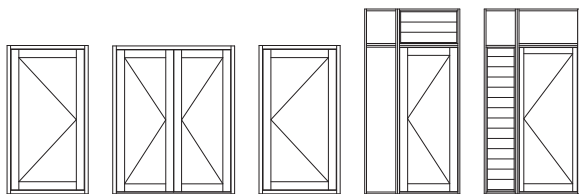

### Key Features

- Framing options compatible with French/Hinge door integration
- A complete integrated screened frame offering external security and flyscreen options including Invisi-Gard®
- Suitable for suburban housing and multi-unit residential market
- Suitable to a range of terrain conditions
- Various glazing options for energy compliance
- Integrated timber reveal provision to suite various construction types

### Technical Specifications

Frame Dimensions	
Option 1	125 x 32mm
French Door	Width 40mm

Maximum Product Performance	
SLS (Pa)	1500
ULS (Pa)	2780
French Door Water (Pa)	200

Maximum Product Performance	
Height	3600mm
Width	900mm
French Door Height	2400mm
French Door Width	1200mm
French Door Weight	50kgs

Glazing Details	
Glass Position	Centre
Single Glazed	4 - 10.38mm
Double Glazed	18 - 25mm

Acoustic Performance Rw (C;Ctr)	
6.38mm Laminate	30 (-1,-2) dB

Thermal Performance	
Uw range SG	3.1 - 5.9
SHGC range SG	0.17 - 0.58

Compatible Systems	
Commercial Windows & Doors	Swan Evo 45mm Commercial Shopfront Door
Commercial Windows & Doors	Torrens 45mm Shopfront Door