

Hydraulic gate hinges and closers. Compact, powerful, smooth.




Precision-engineered to suit industrial-style heavy and high-traffic gates



GATE HINGES • GATE CLOSERS • HINGE-CLOSERS







Gap variance 12-35mm, minimum fence post size of 50mm Quick-fit alignment legs with double face-fixing strength

Models '108' have adjustable, final snap-close action

· Concealed hydraulics for controlled, quiet closure

- Heavy duty, 50-micron anodising 1330064 - RF SM S PLAIN PIVOT HINGE
- 1332212 108SF S HINGE/CLOSER & SAFETY FEATURE

Access Co	ontrol	Weight Capacity
1330064 +	1330064	680kg
gate Forcing a gate wit	"SF hinges must carry a gate-stop that prevents the gate opening more than 90°. Forcing a gate with SF hinges beyond a 90° opening will damage the hinges and void the Warranty.	

bookings fo Emerson Tennis C For all enquiries & b

Maximum

Self-Closing Gate

Weight*

80kg

120kg

Weight Capacity









 Non self-closing models available 	Flush Mount swings out	
• 90° and 180° opening models		

- Prevent gate slam noise & gate damage Heavy duty, 50-micron anodising
 - 1332214 108AT90S FLUSH MOUNT HINGE/CLOSER

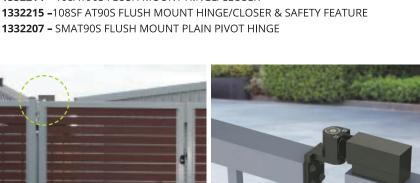





Hinge

Combinations

1332215* + 1332207

1332215* + 1332215*

Access Control

SureClose® EASY Centre-mounted, hydraulic gate closer



- · Horizontally adjustable up to 100mm gate gaps

Self-closes gates up to 80kg

- Easy to install: mounts to top of gate
- Heavy duty, 50-micron anodising 1332164 - SCE108SF S EASY CLOSER

Opens to, and self-closes from, 90°



		l
Gate Size	Maximum Self-Closing Gate Weight*	

80kg

***CAUTION:** Based on max gate size 1800x1000mm. For gates with greater HxW, or if weather conditions such as wind play a significant role, use hinge combinations with higher self-closing weight ratings.

1.8mH x 1.2mW

alspec.com.au