


Altitude

APARTMENT SLIDING DOOR

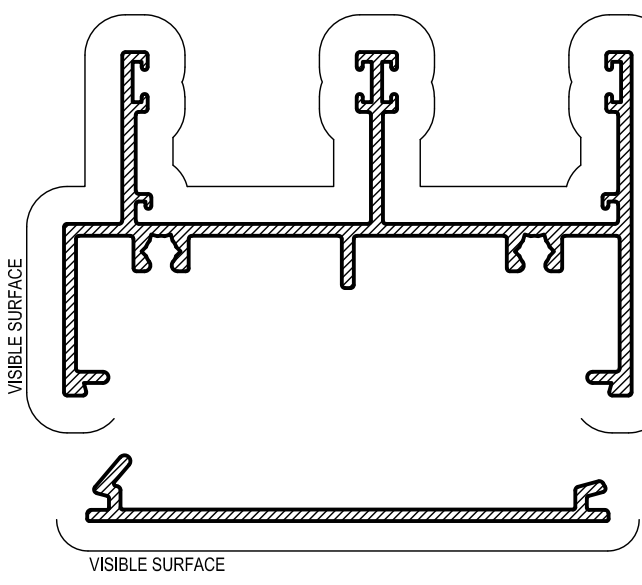


APT1
76mm HEAD / JAMB
APT1s
76mm SLOTTED SILL

Mass. 1,079 Kg/m
Anod Per. 499
Paint Per. 318
lxx = 301.21 x 10³ mm⁴
lyy = 49.51 x 10³ mm⁴

AS55
76mm FLAT
INFILL

Mass. 0,356 Kg/m
Anod Per. 170
Paint Per. 100

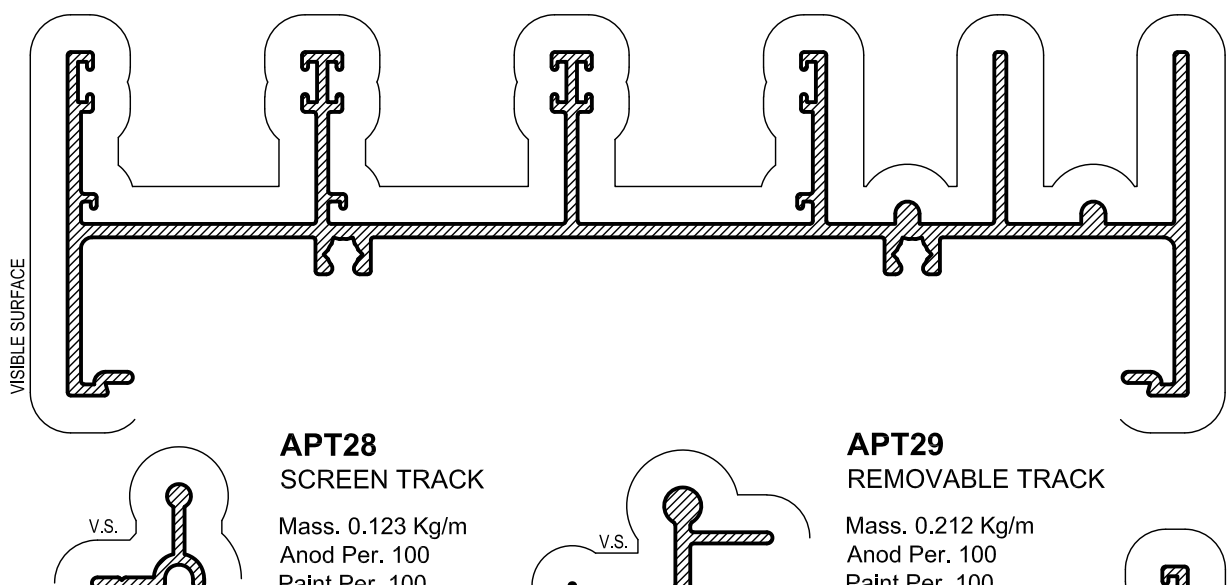


APT28
SCREEN TRACK

Mass. 0,123 Kg/m
Anod Per. 100
Paint Per. 100


APT29
REMOVABLE TRACK

Mass. 0,212 Kg/m
Anod Per. 100
Paint Per. 100

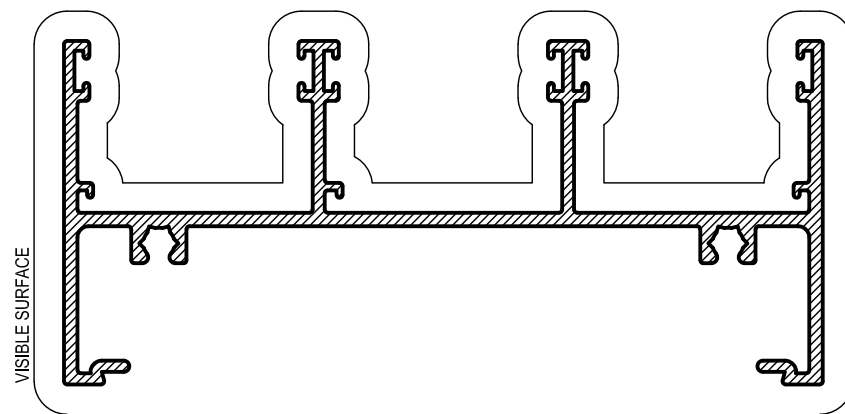

APT2
101mm HEAD / JAMB
APT2s
SLOTTED SILL 101.6mm

Mass. 1,410 Kg/m
Anod Per. 626
Paint Per. 433
lxx = 721.98 x 10³ mm⁴
lyy = 65.48 x 10³ mm⁴

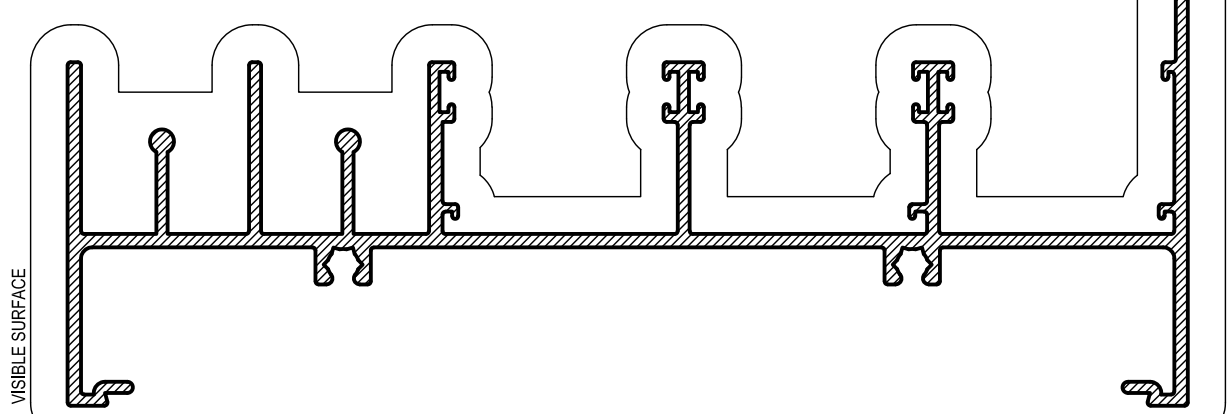


APT27
SILL SCREEN
ADAPTOR

Mass. 0,238 Kg/m
Anod Per. 129
Paint Per. 100

APT26
FRAME SCREEN
ADAPTOR

Mass. 0,211 Kg/m
Anod Per. 119
Paint Per. 100

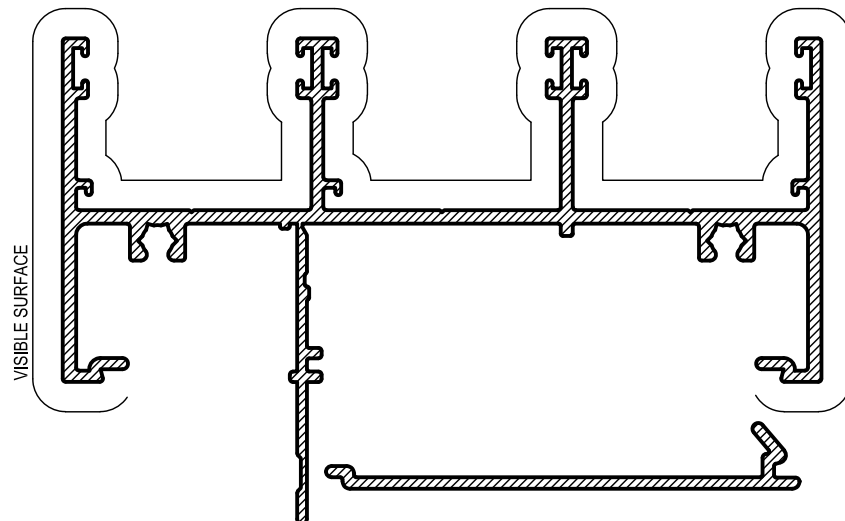


APT101
101.6mm REVEAL
HEAD / JAMB

Mass. 1,571 Kg/m
Anod Per. 721
Paint Per. 347
lxx = 740.36 x 10³ mm⁴
lyy = 97.62 x 10³ mm⁴


APT102
101.6mm REVEAL INFILL
HEAD / JAMB

Mass. 0,309 Kg/m
Anod Per. 148
Paint Per. No Visible Surface

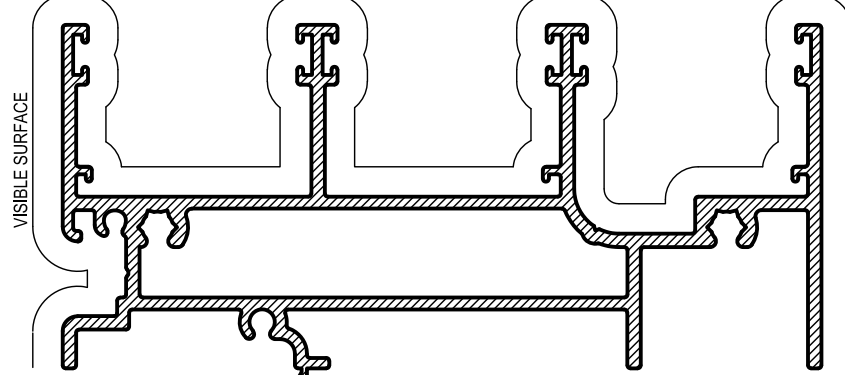


APT56S
HOLLOW SILL

Mass. 1,899 Kg/m
Anod Per. 688
Paint Per. 450

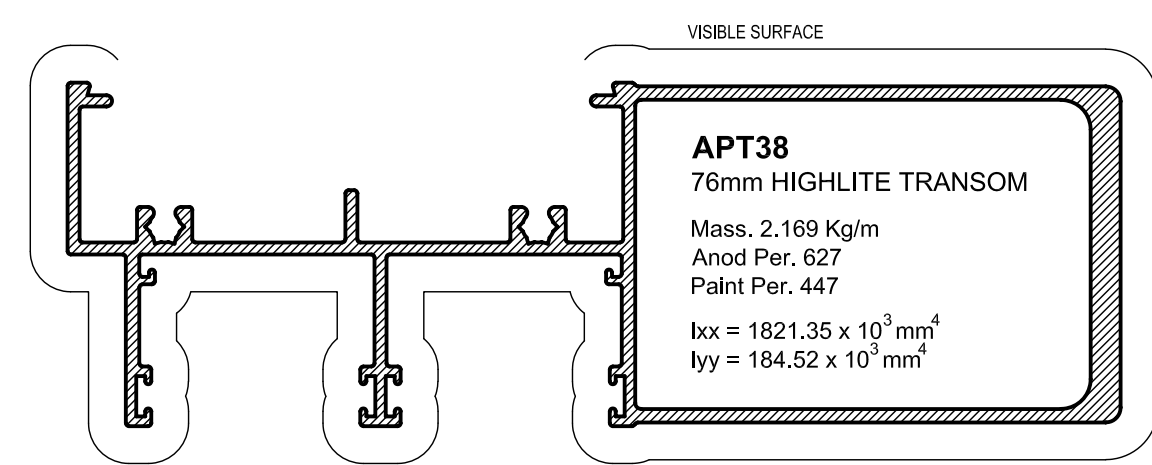


APT38
76mm HIGHLITE TRANSOM

Mass. 2,169 Kg/m
Anod Per. 627
Paint Per. 447
lxx = 1821.35 x 10³ mm⁴
lyy = 184.52 x 10³ mm⁴

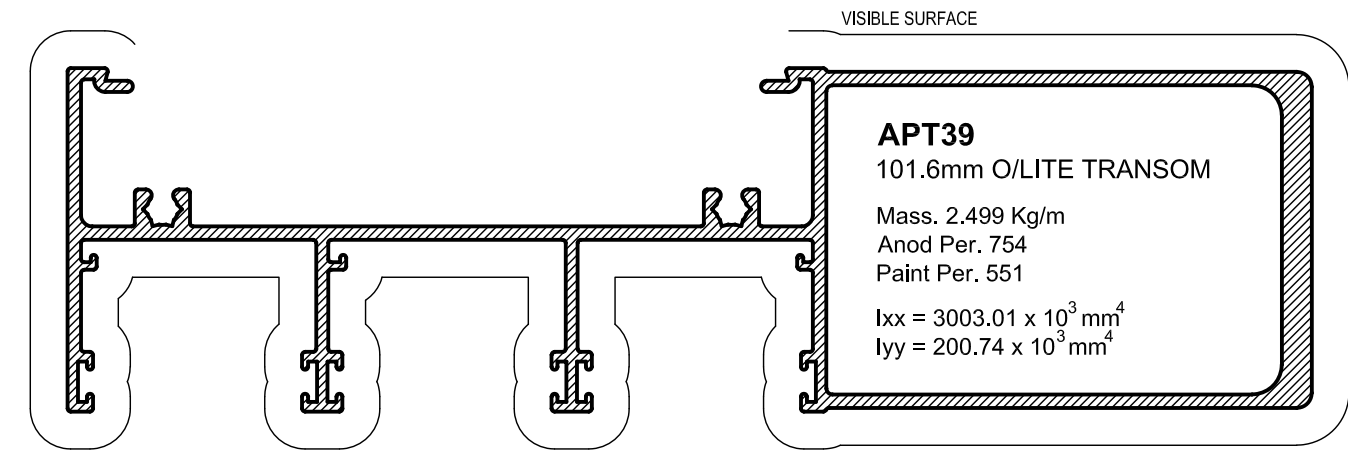


APT39
101.6mm O/LITE TRANSOM

Mass. 2,499 Kg/m
Anod Per. 754
Paint Per. 551
lxx = 3003.01 x 10³ mm⁴
lyy = 200.74 x 10³ mm⁴

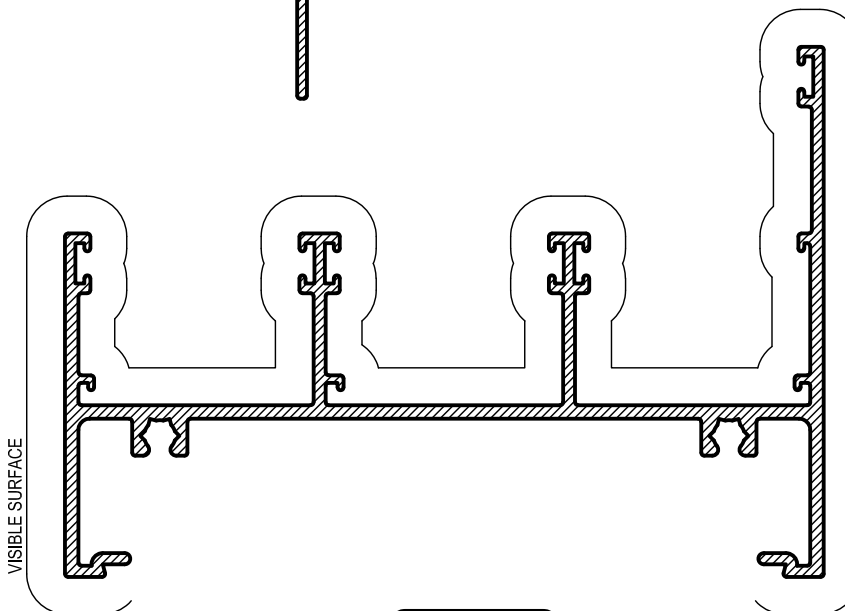


APT36s
SLOTTED 101.6mm
HIGH SILL

Mass. 1,531 Kg/m
Anod Per. 681
Paint Per. 476
lxx = 824.26 x 10³ mm⁴
lyy = 119.82 x 10³ mm⁴

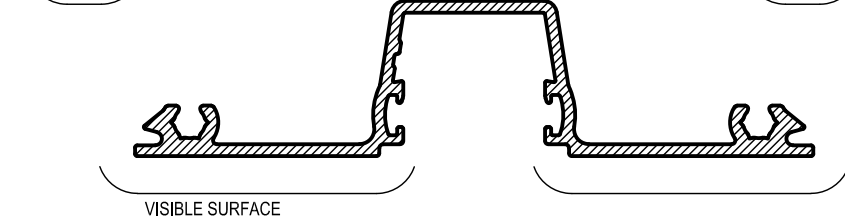


APT801
GLAZING ADAPTOR
(ME POCKET)

Mass. 0,713 Kg/m
Anod Per. 315
Paint Per. 100

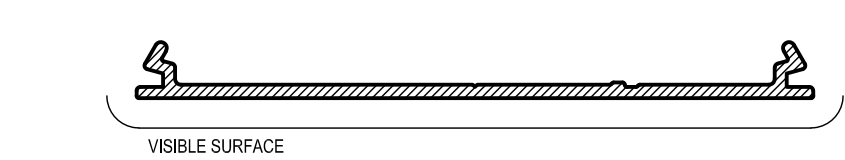


AS5
FLAT INFILL

Mass. 0,500 Kg/m
Anod Per. 213
Paint Per. 100

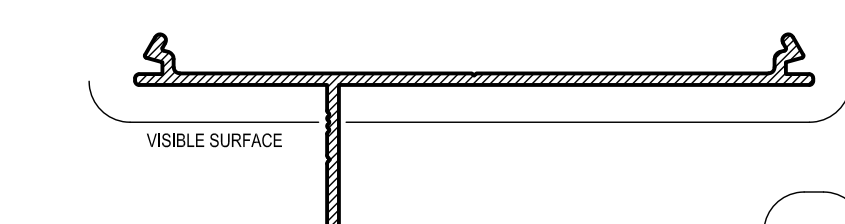


AS221
20mm REVEAL
ADAPTOR

Mass. 0,522 Kg/m
Anod Per. 250
Paint Per. 100

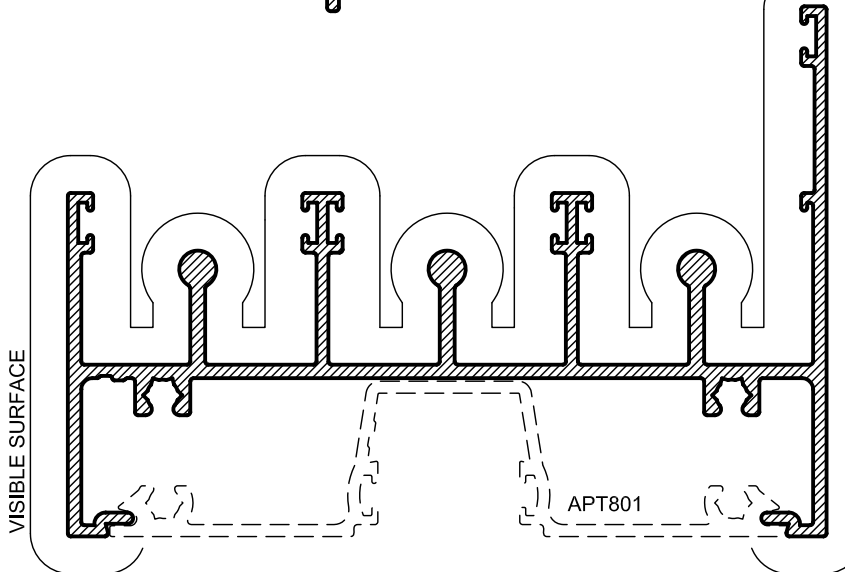


APT94S
101.6mm HIGH
PERFORMANCE SILL
(PART SLOTTED)

Mass. 1,836 Kg/m
Anod Per. 762
Paint Per. 558

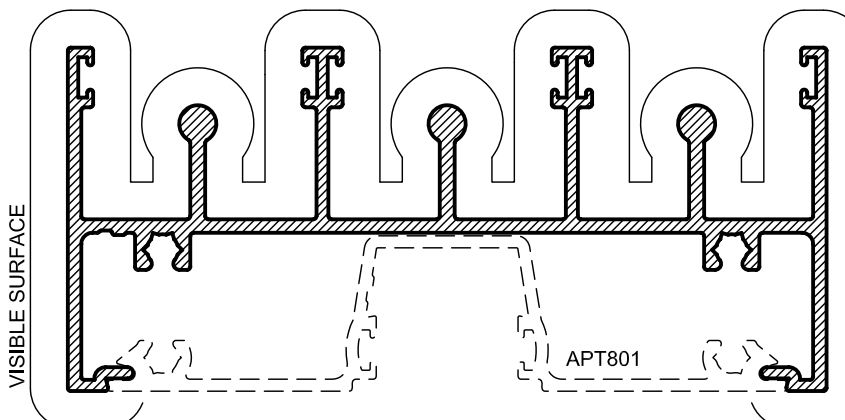


APT93S
101.6mm STANDARD
SILL (SLOTTED)

Mass. 1,715 Kg/m
Anod Per. 707
Paint Per. 503

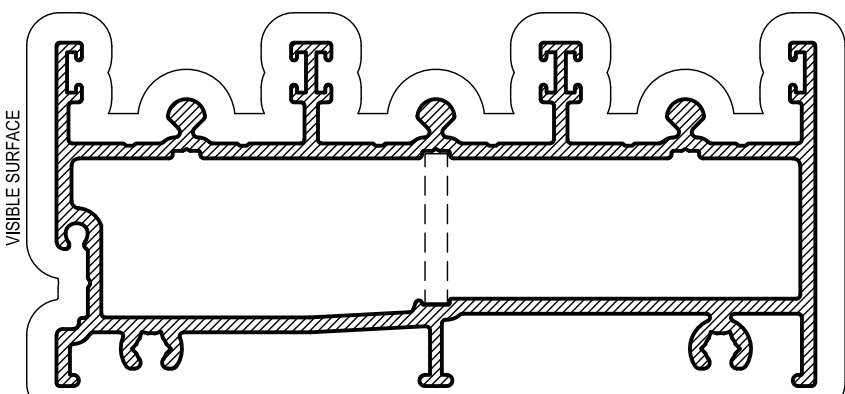


APT64S
HOLLOW SILL
(INCL TRACK)

Mass. 2,104 Kg/m
Anod Per. 582
Paint Per. 275

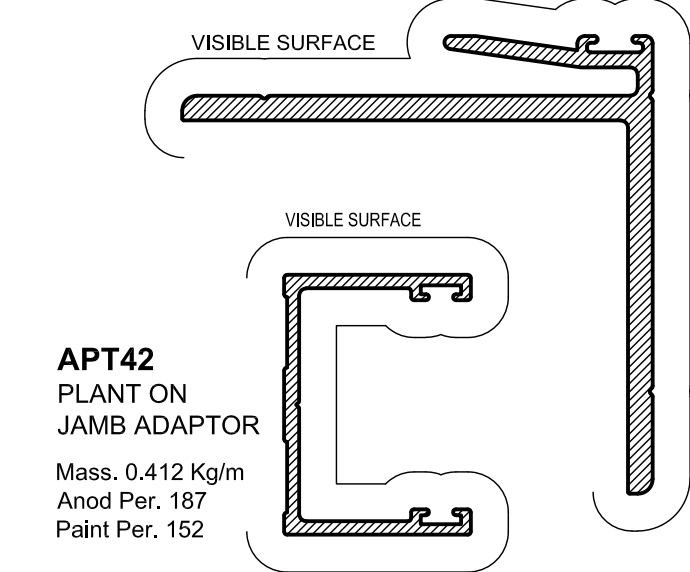


APT42
PLANT ON
JAMB ADAPTOR

Mass. 0,412 Kg/m
Anod Per. 101
Paint Per. 152

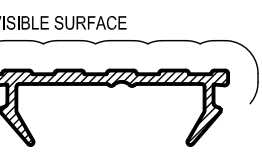


APT60
FLAT THRESHOLD

Mass. 0,20 Kg/m
Anod Per. 105
Paint Per. 100

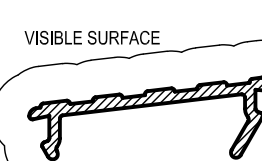


APT41
WHEEL CHAIR
THRESHOLD

Mass. 0,204 Kg/m
Anod Per. 101
Paint Per. 100

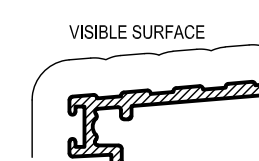


APT43
STD THRESHOLD

Mass. 0,332 Kg/m
Anod Per. 168
Paint Per. 100

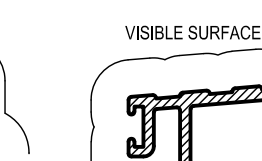


APT6
MID THRESHOLD

Mass. 0,412 Kg/m
Anod Per. 209
Paint Per. 100

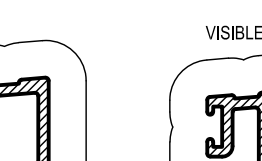


APT7
HIGH THRESHOLD

Mass. 0,436 Kg/m
Anod Per. 221
Paint Per. 100

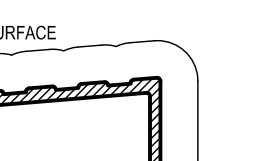


APT30
EXTRA HIGH
THRESHOLD

Mass. 0,458 Kg/m
Anod Per. 232
Paint Per. 113

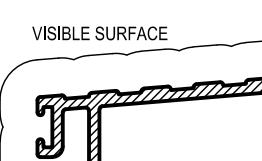


APT33
INTERNAL MID
THRESHOLD

Mass. 0,406 Kg/m
Anod Per. 206
Paint Per. 100

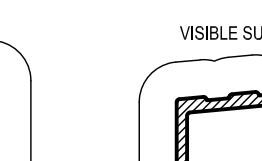


APT34
INTERNAL HIGH
THRESHOLD

Mass. 0,430 Kg/m
Anod Per. 219
Paint Per. 100




PRG018
36mm SS STORM
GRATE 1000mm

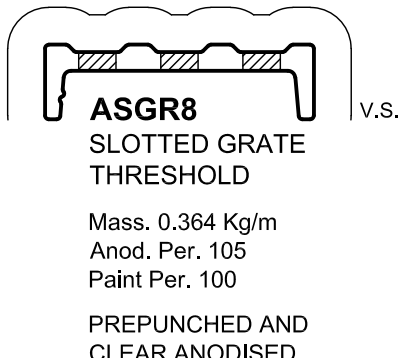

ASGR8
SLOTTED GRATE
THRESHOLD


Mass. 0,364 Kg/m
Anod Per. 105
Paint Per. 100

PREPUNCHED AND
CLEAR ANODISED

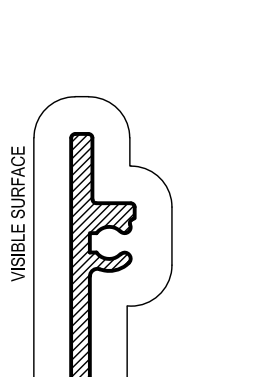

AD802
FLUSH GRATE
SILL ADAPTOR

Mass. 0,437 Kg/m
Anod Per. 132
Paint Per. 115

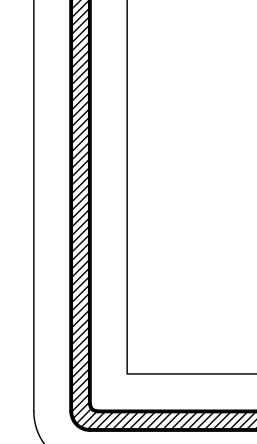


AD808
100mm FLUSH
GRATE SILL

Mass. 2,578 Kg/m
Anod Per. 740
Paint Per. 293

APT3
150mm HEAD / JAMB
APT3s
150mm SLOTTED SILL

Mass. 1,904 Kg/m
Anod Per. 824
Paint Per. 571
lxx = 1853.41 x 10³ mm⁴
lyy = 77.04 x 10³ mm⁴

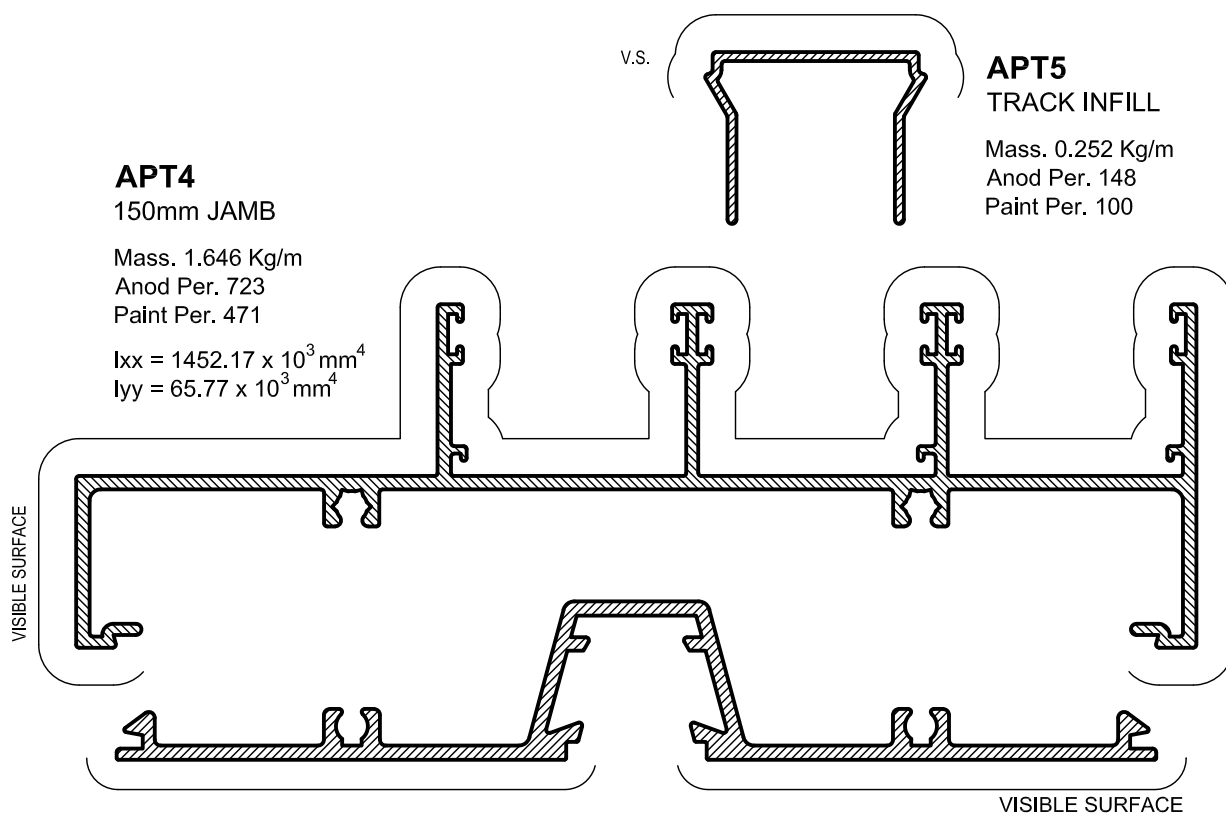


APT4
150mm JAMB
APT5
TRACK INFILL

Mass. 1,646 Kg/m
Anod Per. 723
Paint Per. 471
lxx = 1452.17 x 10³ mm⁴
lyy = 65.77 x 10³ mm⁴


AS64
6" FRAME GLAZING
ADAPTOR

Mass. 1,140 Kg/m
Anod Per. 432
Paint Per. 120

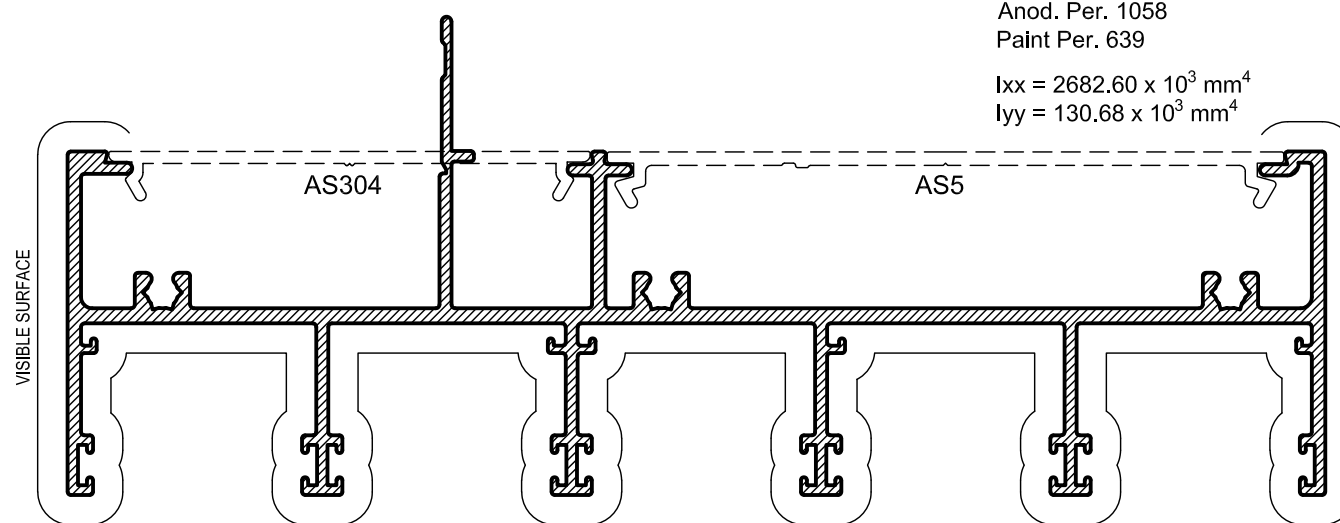


APT82
5 TRACK HEAD
/ JAMB

Mass. 2,440 Kg/m
Anod Per. 1058
Paint Per. 639
lxx = 2682.60 x 10³ mm⁴
lyy = 130.68 x 10³ mm⁴

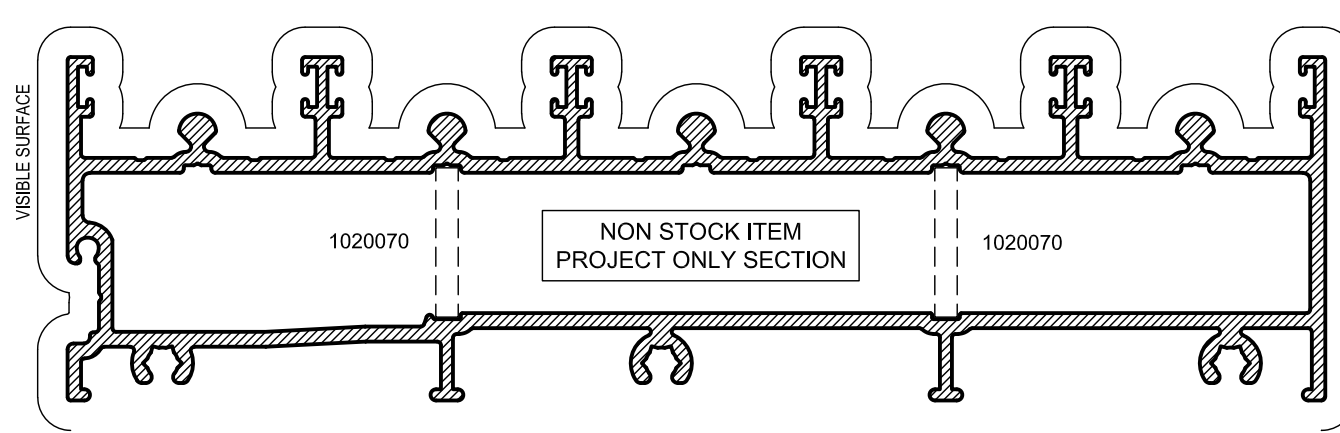


APT81S
5 TRACK
HOLLOW SILL

Mass. 3,250 Kg/m
Anod Per. 890
Paint Per. 580

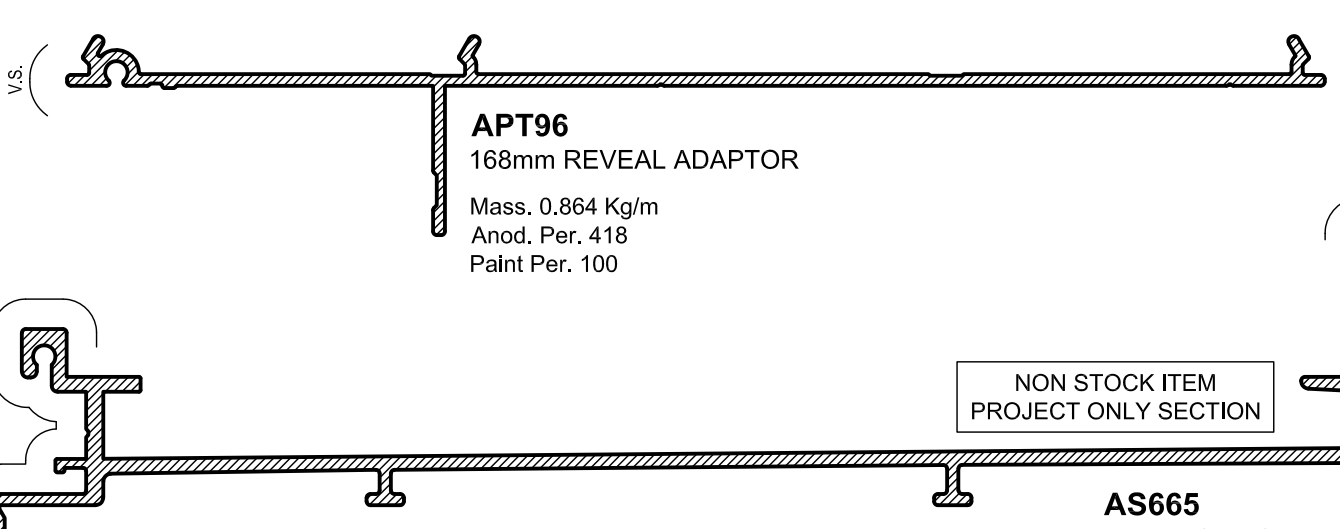


APT96
168mm REVEAL ADAPTOR

Mass. 0,864 Kg/m
Anod Per. 418
Paint Per. 100

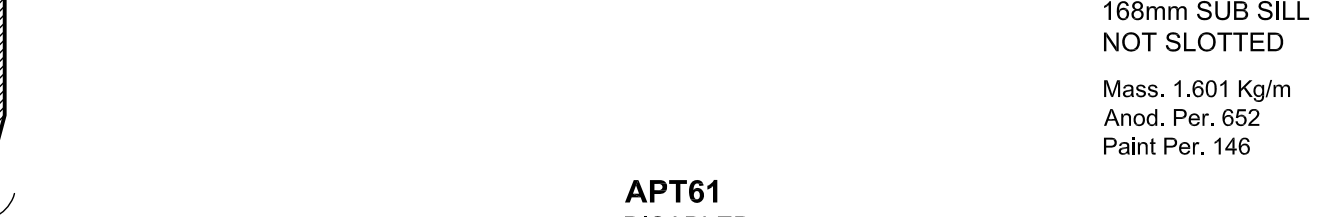

AS66S
168mm SUB SILL
NOT SLOTTED



Mass. 1,601 Kg/m
Anod Per. 652
Paint Per. 146

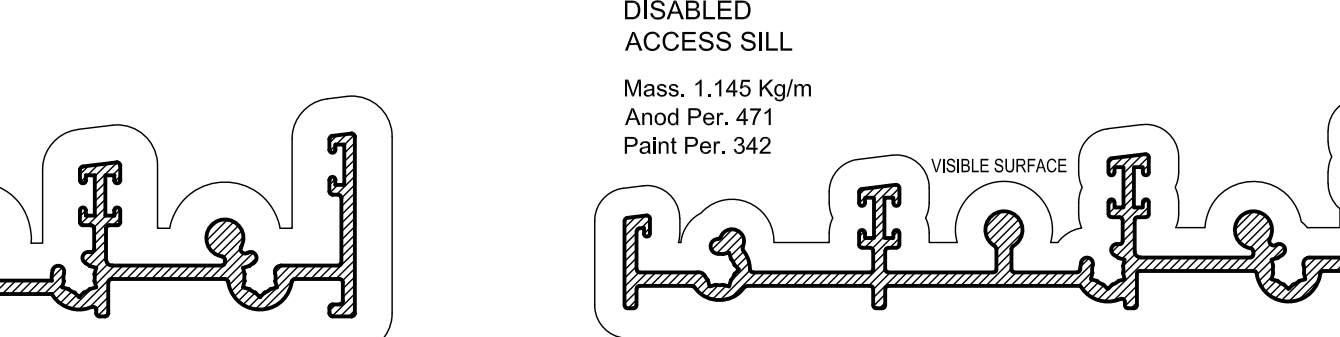

APT61
DISABLED
ACCESS SILL


Mass. 1,145 Kg/m
Anod Per. 471
Paint Per. 342

NOTE: REFER CLOUDED AREA ON THRESHOLDS
1 BUMP REPRESENTS MID THRESHOLDS
2 BUMPS REPRESENT HIGH THRESHOLDS
3 BUMPS REPRESENT EXTRA HIGH THRESHOLDS

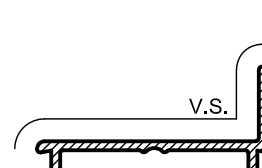


APT112
SCREEN INFILL

Mass. 0,216 Kg/m
Anod Per. 125
Paint Per. 100

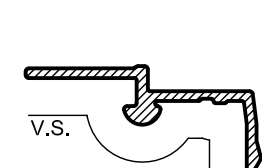


APT113
SCREEN HEAD
ADAPTOR

Mass. 0,189 Kg/m
Anod Per. 100
Paint Per. 100



APT98
PARTITION TRACK

Mass. 0,444 Kg/m
Anod Per. 114
Paint Per. 100

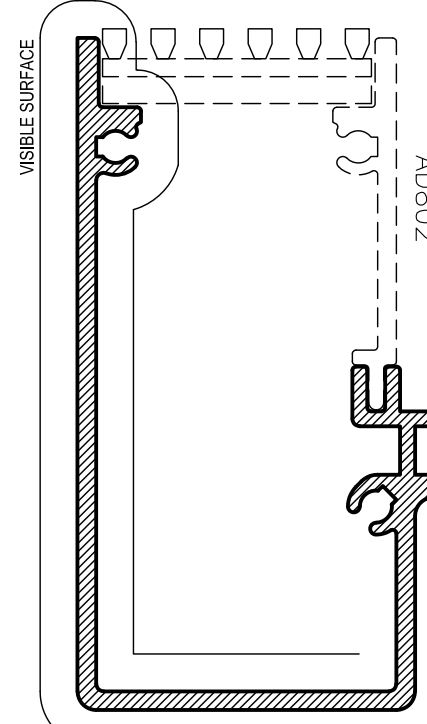

AD809
150mm FLUSH
GRATE SILL

Mass. 2,983 Kg/m
Anod Per. 840
Paint Per. 293

