

# ProGlide

## HIGH PERFORMANCE SLIDING DOOR

**alspec**<sup>®</sup>  
EVERYTHING ALUMINIUM  
& HARDWARE

### DOUBLE TRACK FRAMING

**ME4**  
GLAZING  
ADAPTOR  
Mass, 0.692 Kg/m  
Anod. Per. 305  
Paint Per. 100  
Ixx = 187.7 x 10<sup>3</sup> mm<sup>4</sup>

**AD841**  
DOUBLE HEAD  
/ JAMB  
Mass, 1.549 Kg/m  
Anod. Per. 584  
Paint Per. 359  
Ixx = 829.30 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 104.80 x 10<sup>3</sup> mm<sup>4</sup>

**AD813**  
FIXED PANEL  
SUPPORT  
Mass, 0.491 Kg/m  
Anod. Per. 181  
Paint Per. 100

**AD812**  
TRACK  
Mass, 0.271 Kg/m  
Anod. Per. 118  
Paint Per. 100

**AD810S**  
DOUBLE  
TRACK SILL  
Mass, 1.606 Kg/m  
Anod. Per. 595  
Paint Per. 402

**AD811**  
DOUBLE TRACK  
SILL SUPPORT  
Mass, 0.655 Kg/m  
Anod. Per. 269  
Paint Per. 100

**AD775**  
PLANT ON TRACK  
Mass, 0.442 Kg/m  
Anod. Per. 117  
Paint Per. 100

**AD784**  
SINGLE RECESSED  
ADD ON TRACK  
Mass, 0.754 Kg/m  
Anod. Per. 197  
Paint Per. 100

**AD783**  
RECESSED  
DOUBLE TRACK  
Mass, 1.383 Kg/m  
Anod. Per. 366  
Paint Per. 165

**AS5**  
FLUSH FRAME  
ADAPTOR  
Mass, 0.500 Kg/m  
Anod. Per. 213  
Paint Per. 100

**AD742WS**  
DOUBLE TRACK GUTTER  
SILL WITH WEB  
Mass, 2.385 Kg/m  
Anod. Per. 629  
Paint Per. 517

**AD797**  
SLIDING DOOR  
FIXED PANEL  
ADAPTOR  
Mass, 0.513 Kg/m  
Anod. Per. 210  
Paint Per. 100  
SUITS AD742S ONLY

**AD750**  
SINGLE CHANNEL  
TRACK  
Mass, 0.571 Kg/m  
Anod. Per. 235  
Paint Per. 186  
Ixx = 84.97 x 10<sup>3</sup> mm<sup>4</sup>

**AD765**  
DISABLED  
THRESHOLD  
Mass, 0.362 Kg/m  
Anod. Per. 173  
Paint Per. 100

**AD762**  
DISABLED SILL  
Mass, 0.822 Kg/m  
Anod. Per. 299  
Paint Per. 189

**HE332**  
HUNTER EVO  
SG ADAPTOR  
Mass, 0.536 Kg/m  
Anod. Per. 221  
Paint Per. 100  
Ixx = 111.89 x 10<sup>3</sup> mm<sup>4</sup>

**HE883**  
PROGLIDE /  
HUNTER EVO  
HEAD  
Mass, 1.809 Kg/m  
Anod. Per. 687  
Paint Per. 381  
Ixx = 867.03 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 107.90 x 10<sup>3</sup> mm<sup>4</sup>

**HE330**  
HUNTER EVO  
DG ADAPTOR  
Mass, 0.449 Kg/m  
Anod. Per. 185  
Paint Per. 100  
Ixx = 52.45 x 10<sup>3</sup> mm<sup>4</sup>

**AD883S**  
ALT. HP DOUBLE  
TRACK SILL  
Mass, 1.928 Kg/m  
Anod. Per. 696  
Paint Per. 499

**AD888**  
SUITS AD883S  
AND AD887S HIGH  
SILLS ONLY

**AD882S**  
ALT. DOUBLE  
TRACK SILL  
Mass, 1.828 Kg/m  
Anod. Per. 659  
Paint Per. 462

**AD883S**  
ALT. HP DOUBLE  
TRACK SILL  
Mass, 1.928 Kg/m  
Anod. Per. 696  
Paint Per. 499

**AD729**  
THRESHOLD  
Mass, 0.361 Kg/m  
Anod. Per. 179  
Paint Per. 100

**AD816**  
THRESHOLD 1  
Mass, 0.530 Kg/m  
Anod. Per. 255  
Paint Per. 100

**AD818**  
THRESHOLD 3  
Mass, 0.600 Kg/m  
Anod. Per. 291  
Paint Per. 116

**AD943**  
PROGLIDE SCREEN  
THRESHOLD  
Mass, 0.516 Kg/m  
Anod. Per. 207  
Paint Per. 100

**AD935**  
THRESHOLD  
HIGH SILL 2  
Mass, 562 Kg/m  
Anod. Per. 272  
Paint Per. 100

**AD888**  
SUITS AD883S  
AND AD887S HIGH  
SILLS ONLY

**AD888**  
THRESHOLD  
HIGH SILL  
Mass, 520 Kg/m  
Anod. Per. 251  
Paint Per. 100

**AD817**  
THRESHOLD 2  
Mass, 0.564 Kg/m  
Anod. Per. 273  
Paint Per. 107

**AD819**  
THRESHOLD 4  
Mass, 0.414 Kg/m  
Anod. Per. 194  
Paint Per. 100

### 150.3mm TRIPLE TRACK FRAMING

**AS605**

**AD851R**  
150.3mm TRIPLE  
FRAME / JAMB  
Mass, 2.040 Kg/m  
Anod. Per. 776  
Paint Per. 514  
Ixx = 2068.02 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 126.86 x 10<sup>3</sup> mm<sup>4</sup>

**AD831S**  
150.3mm TRIPLE  
TRACK SILL  
Mass, 2.117 Kg/m  
Anod. Per. 794  
Paint Per. 551

**AD815**  
TRIPLE TRACK  
SILL SUPPORT  
Mass, 0.982 Kg/m  
Anod. Per. 400  
Paint Per. 141

**AD601**  
HD 150.3mm TRIPLE FRAME  
HEAD/JAMB 6106 T6  
Mass, 2.941 Kg/m  
Anod. Per. 747  
Paint Per. 432  
Ixx = 2823.10 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 141.99 x 10<sup>3</sup> mm<sup>4</sup>

**AD605**  
SILL RETENTION CLIP  
6060 T6  
Mass, 0.650 Kg/m  
Anod. Per. 209  
No Visible Surface

**AD602**  
HD 150.3mm TRIPLE SILL 6106 T6  
Mass, 3.593 Kg/m  
Anod. Per. 876  
Paint Per. 579

**AD884**  
150.3mm JAMB  
CENTRE CHANNEL  
Mass, 1.763 Kg/m  
Anod. Per. 695  
Paint Per. 399  
Ixx = 1812.86 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 214.21 x 10<sup>3</sup> mm<sup>4</sup>

**AD885**  
150.3mm JAMB  
OFFSET CHANNEL  
Mass, 1.763 Kg/m  
Anod. Per. 695  
Paint Per. 390  
Ixx = 2042.19 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 214.21 x 10<sup>3</sup> mm<sup>4</sup>

**AD886S**  
ALT. TRIPLE  
TRACK SILL  
Mass, 2.446 Kg/m  
Anod. Per. 882  
Paint Per. 634

**AD887S**  
ALT. HP TRIPLE  
TRACK SILL  
Mass, 2.547 Kg/m  
Anod. Per. 919  
Paint Per. 671

**AD888**  
SUITS AD883S  
AND AD887S HIGH  
SILLS ONLY

**HE378**  
HUNTER EVO  
S.G ADAPTOR  
Mass, 0.825 Kg/m  
Anod. Per. 340  
Paint Per. 117  
Ixx = 522.46 x 10<sup>3</sup> mm<sup>4</sup>

**HE390**  
HUNTER EVO  
D.G ADAPTOR  
Mass, 0.687 Kg/m  
Anod. Per. 283  
Paint Per. 101  
Ixx = 299.74 x 10<sup>3</sup> mm<sup>4</sup>

**HE832**  
HUNTER EVO  
TRIPLE TRACK  
HEAD / JAMB  
Mass, 2.146 Kg/m  
Anod. Per. 827  
Paint Per. 516  
Ixx = 2171.24 x 10<sup>3</sup> mm<sup>4</sup>  
Iyy = 126.04 x 10<sup>3</sup> mm<sup>4</sup>


USE WHEN COUPLING WITH HUNTER EVO FRAMING ONLY




# ProGlide

## HIGH PERFORMANCE SLIDING DOOR


### 151.5mm TRIPLE TRACK FRAMING

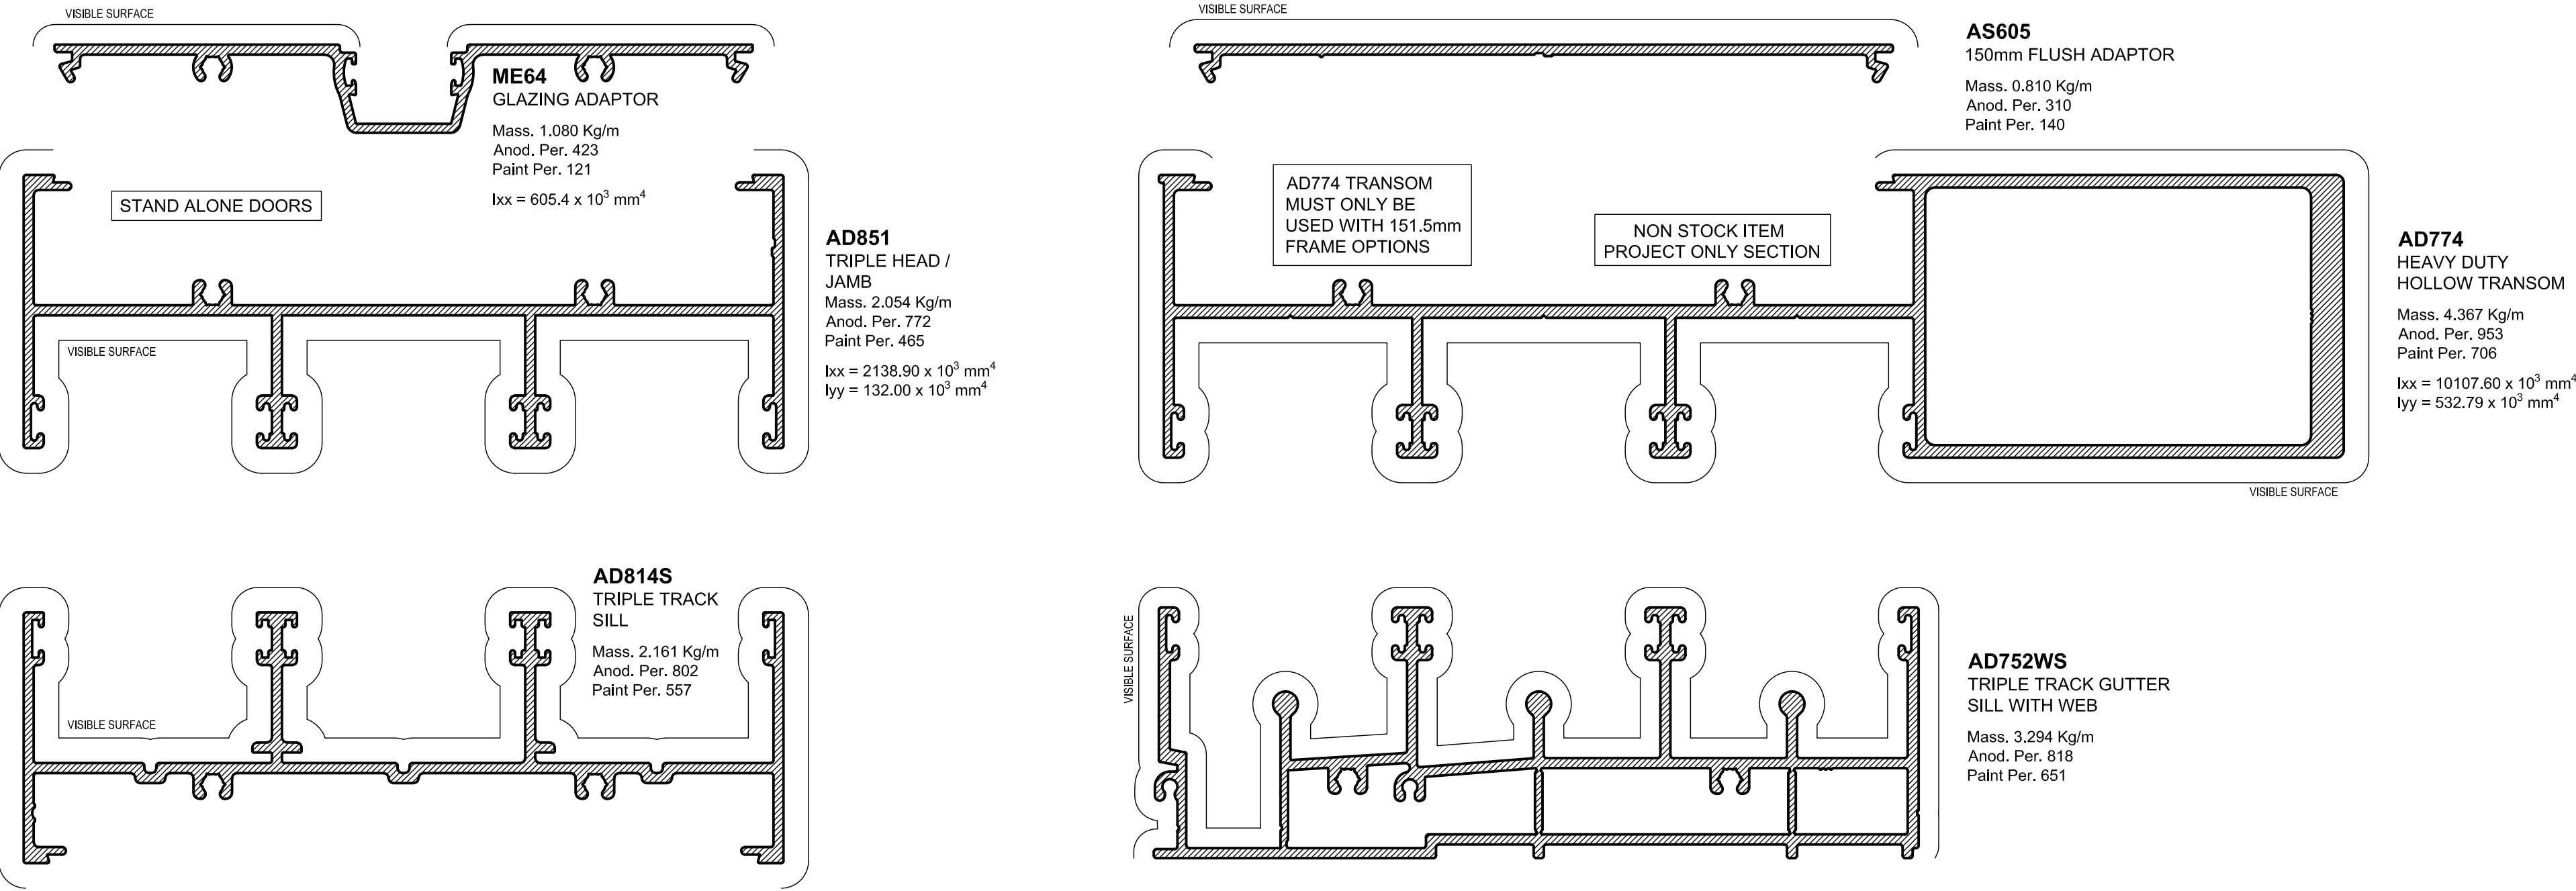

### FOUR TRACK FRAMING

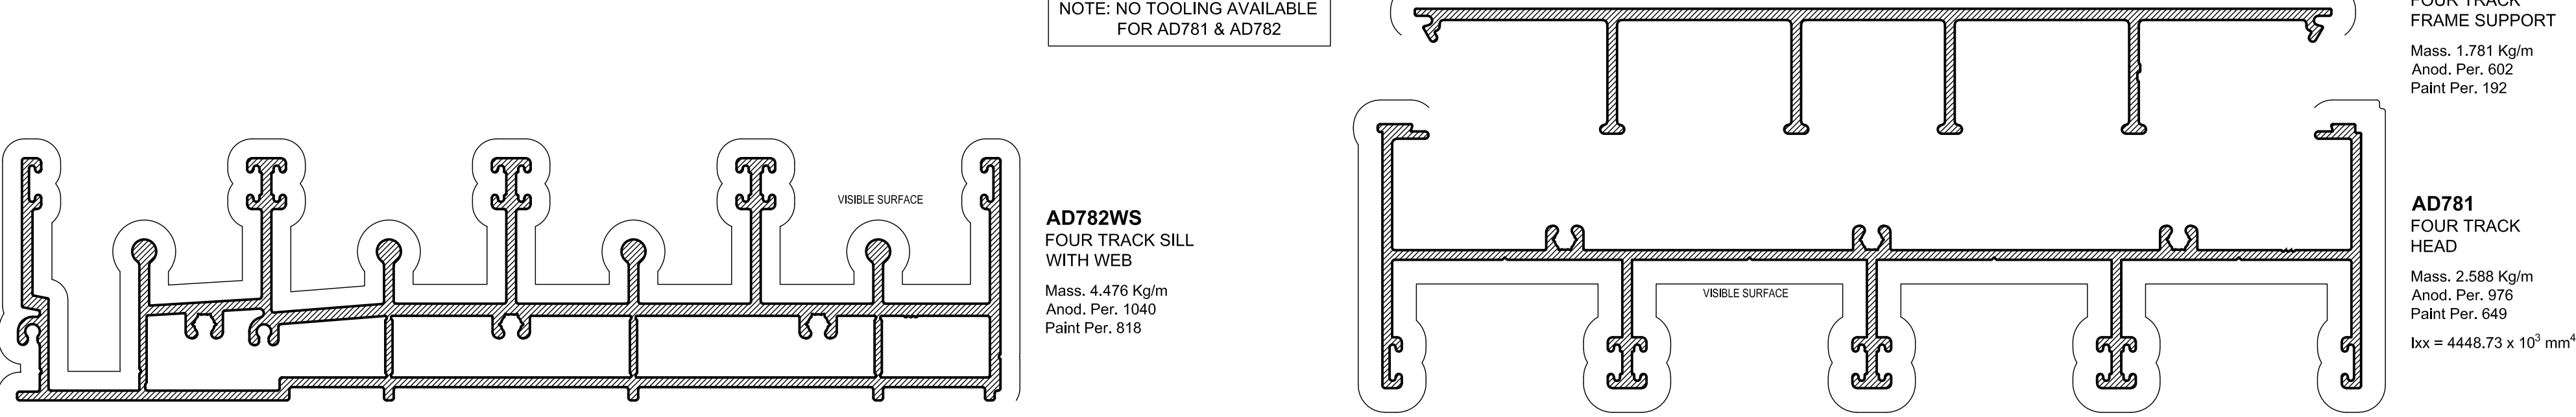

### UltraFlat<sup>®</sup>

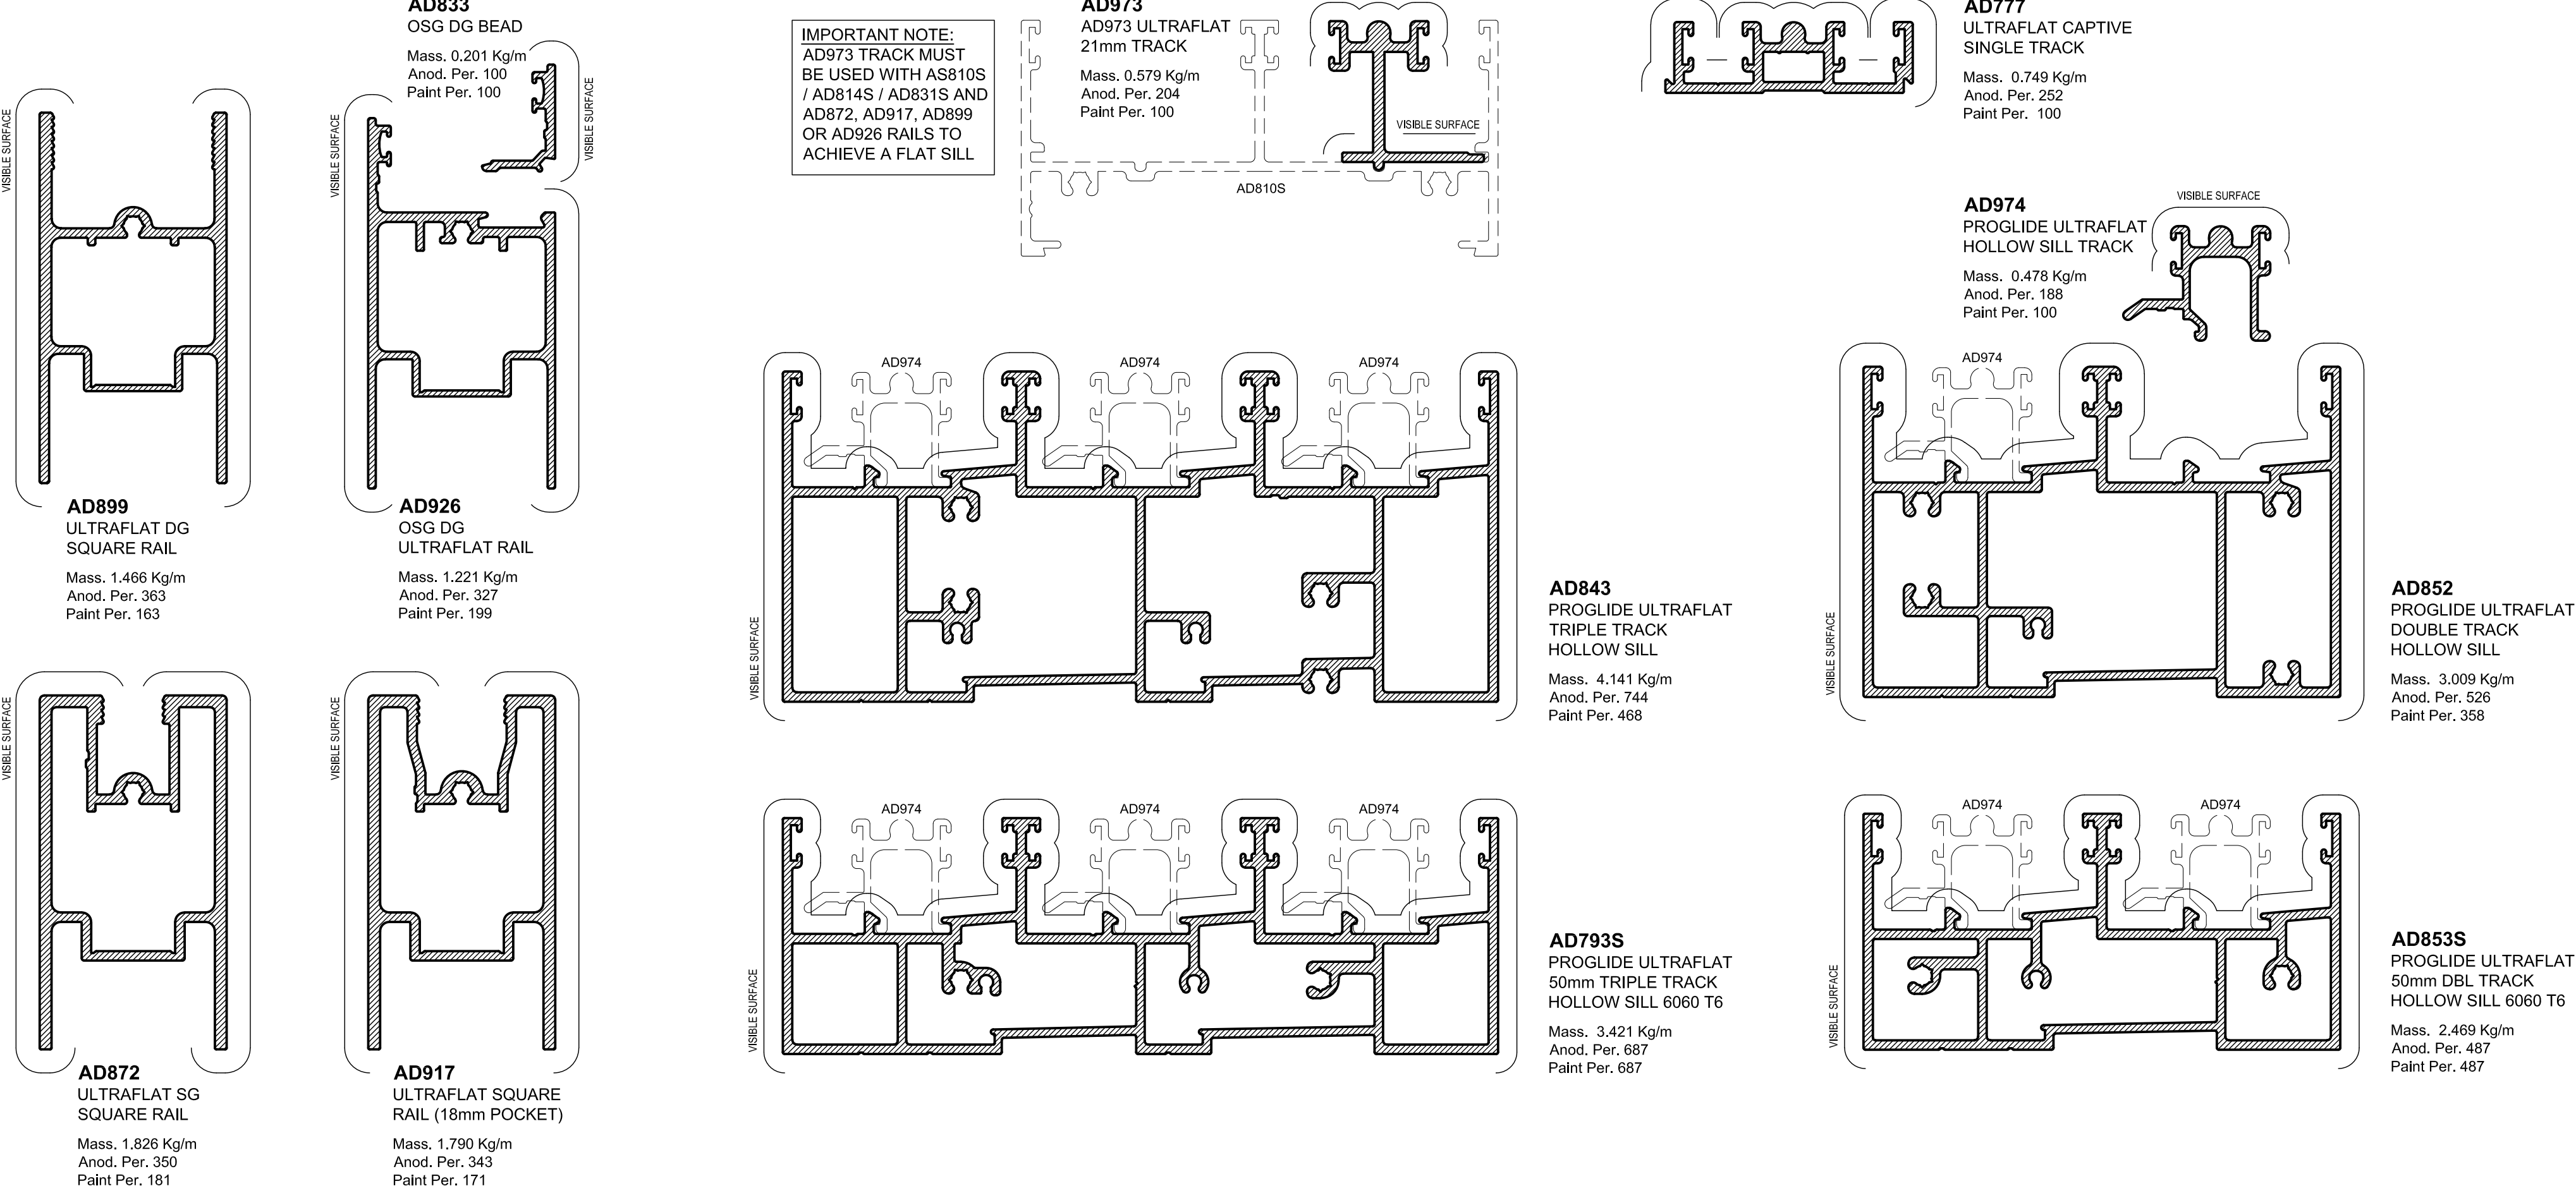





# ProGlide

## HIGH PERFORMANCE SLIDING DOOR


### 12mm POCKET

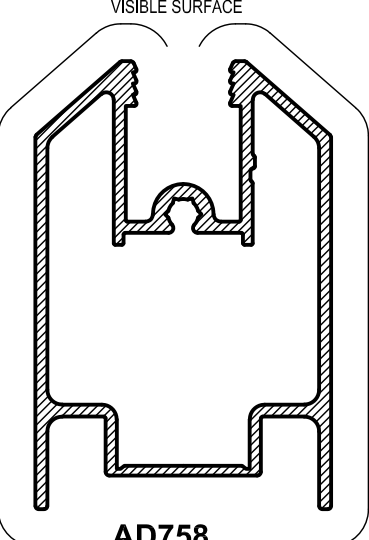


**AD758**  
BEVELLED RAIL  
Mass. 1,121 Kg/m  
Anod. Per. 121  
Paint Per. 139

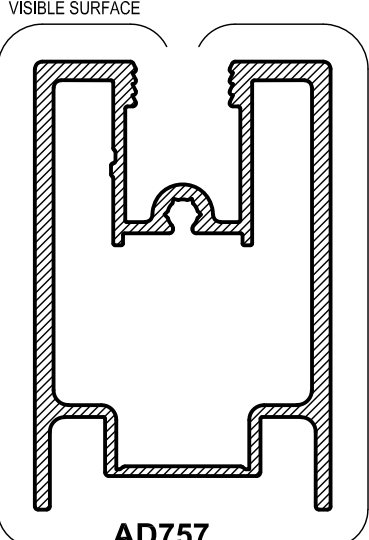


**AD757**  
SQUARE RAIL  
Mass. 1,455 Kg/m  
Anod. Per. 292  
Paint Per. 218

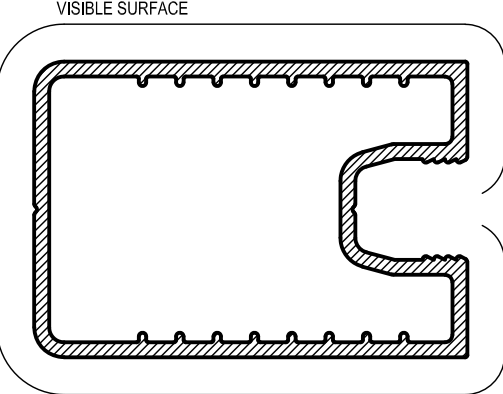


**AD745**  
STD LOCK STILE  
Mass. 1,199 Kg/m  
Anod. Per. 222  
Paint Per. 181  
Ixx = 104.24 x 10<sup>3</sup> mm<sup>4</sup>

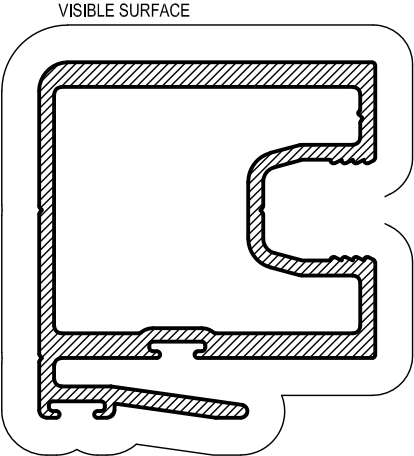


**AD744**  
STD INTERLOCK STILE  
Mass. 1,486 Kg/m  
Anod. Per. 280  
Paint Per. 237  
Ixx = 150.70 x 10<sup>3</sup> mm<sup>4</sup>

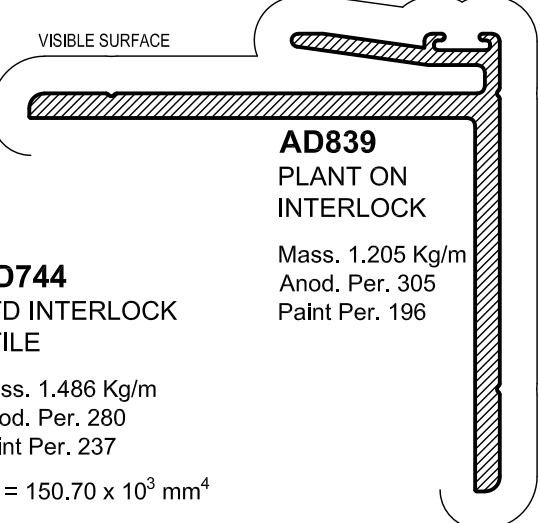


**AD839**  
PLANT ON INTERLOCK  
Mass. 1,205 Kg/m  
Anod. Per. 305  
Paint Per. 196

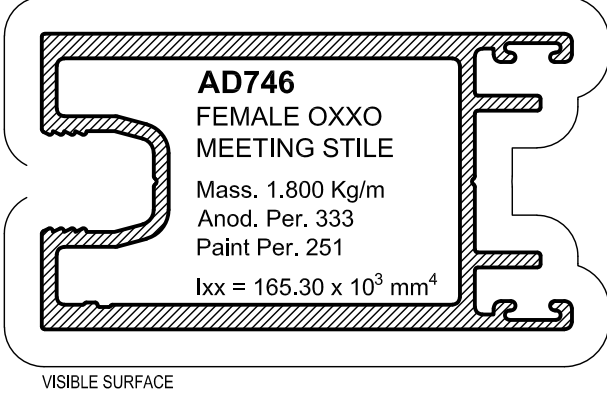


**AD746**  
FEMALE OXO MEETING STILE  
Mass. 1,800 Kg/m  
Anod. Per. 333  
Paint Per. 251  
Ixx = 165.30 x 10<sup>3</sup> mm<sup>4</sup>

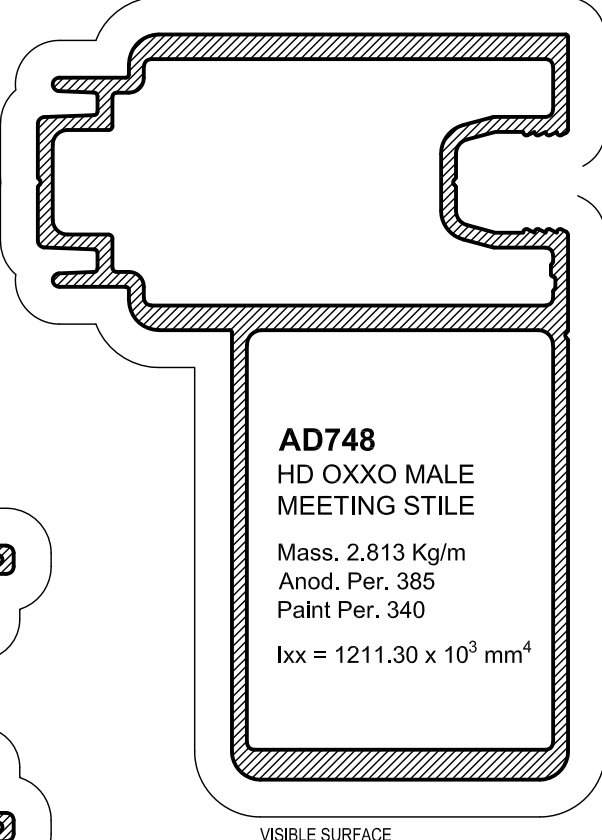


**AD748**  
HD OXO MALE MEETING STILE  
Mass. 2,813 Kg/m  
Anod. Per. 385  
Paint Per. 340  
Ixx = 1211.30 x 10<sup>3</sup> mm<sup>4</sup>

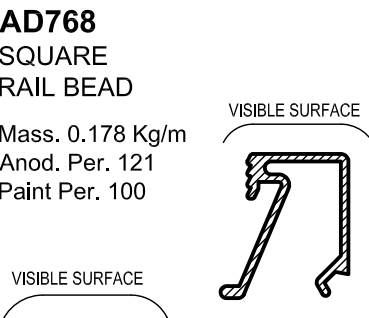


**AD768**  
SQUARE RAIL BEAD  
Mass. 0,178 Kg/m  
Anod. Per. 121  
Paint Per. 100

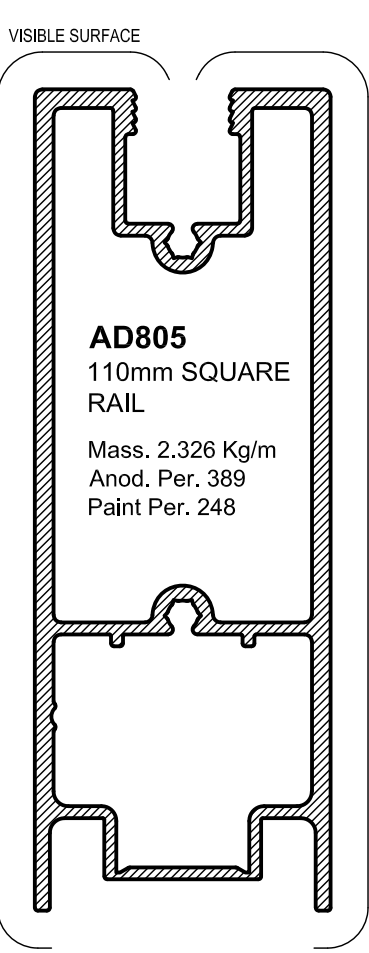


**AD805**  
110mm SQUARE RAIL  
Mass. 2,326 Kg/m  
Anod. Per. 389  
Paint Per. 248

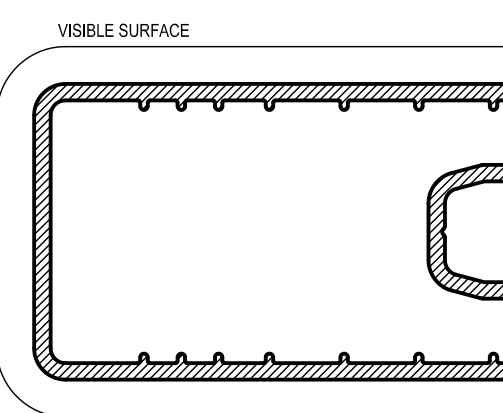


**AD795**  
70mm LOCK STILE  
Mass. 1,450 Kg/m  
Anod. Per. 246  
Paint Per. 202  
Ixx = 130.20 x 10<sup>3</sup> mm<sup>4</sup>

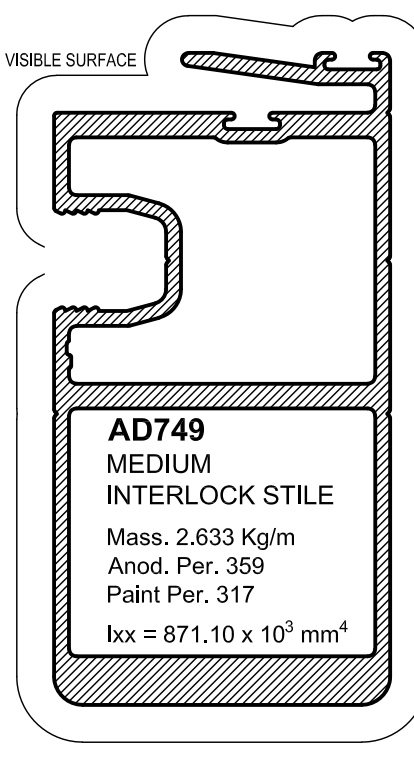


**AD749**  
MEDIUM INTERLOCK STILE  
Mass. 2,633 Kg/m  
Anod. Per. 359  
Paint Per. 317  
Ixx = 871.10 x 10<sup>3</sup> mm<sup>4</sup>

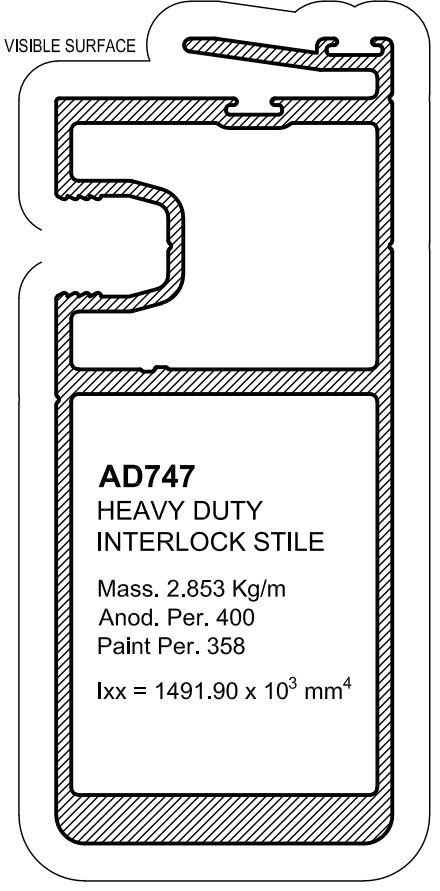


**AD747**  
HEAVY DUTY INTERLOCK STILE  
Mass. 2,853 Kg/m  
Anod. Per. 400  
Paint Per. 358  
Ixx = 1491.90 x 10<sup>3</sup> mm<sup>4</sup>

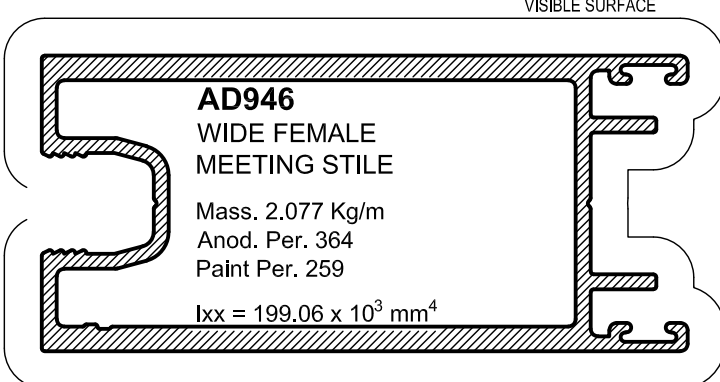


**AD946**  
WIDE FEMALE MEETING STILE  
Mass. 2,077 Kg/m  
Anod. Per. 364  
Paint Per. 259  
Ixx = 199.06 x 10<sup>3</sup> mm<sup>4</sup>

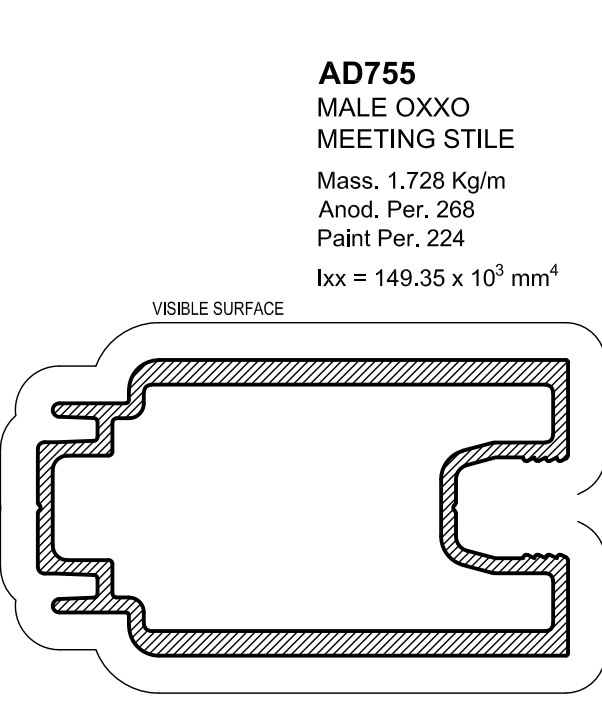


**AD755**  
MALE OXO MEETING STILE  
Mass. 1,728 Kg/m  
Anod. Per. 258  
Paint Per. 224  
Ixx = 149.35 x 10<sup>3</sup> mm<sup>4</sup>

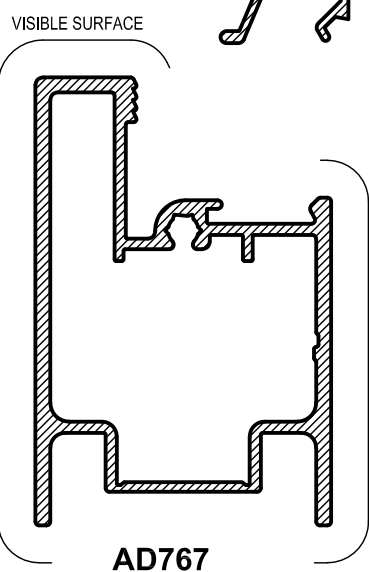


**AD767**  
SQUARE BEADED RAIL  
Mass. 1,103 Kg/m  
Anod. Per. 258  
Paint Per. 122

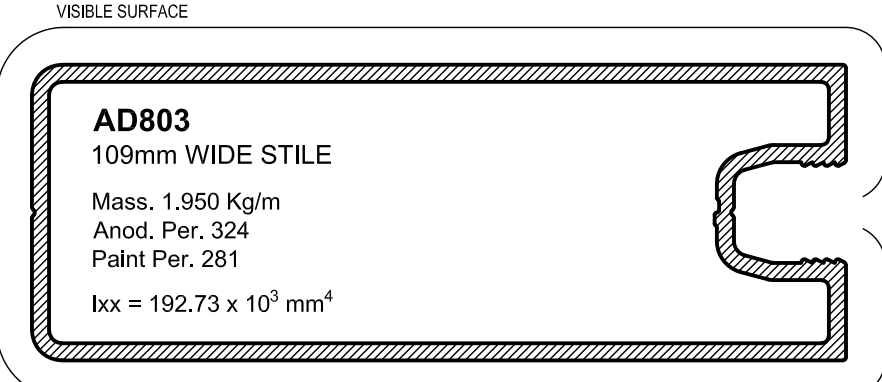


**AD803**  
109mm WIDE STILE  
Mass. 1,950 Kg/m  
Anod. Per. 324  
Paint Per. 281  
Ixx = 192.73 x 10<sup>3</sup> mm<sup>4</sup>

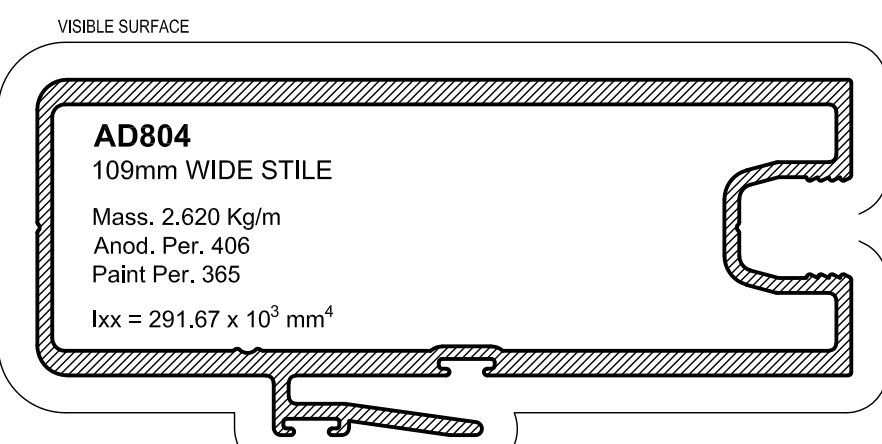


**AD804**  
109mm WIDE STILE  
Mass. 2,620 Kg/m  
Anod. Per. 406  
Paint Per. 365  
Ixx = 291.67 x 10<sup>3</sup> mm<sup>4</sup>

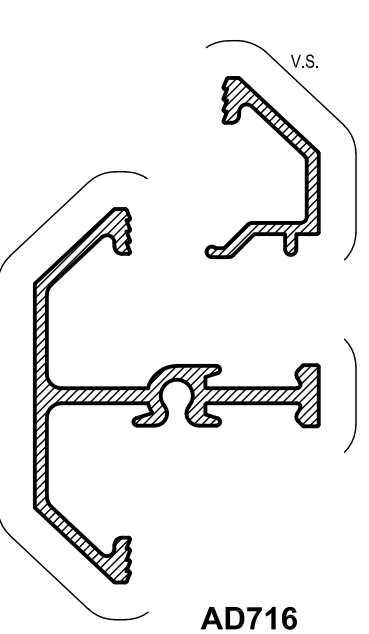


**AD717**  
PROGLIDE DOOR BEAD  
Mass. 0,207 Kg/m  
Anod. Per. 100  
Paint Per. 100

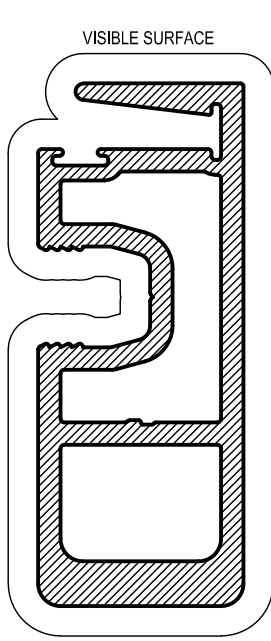


**AD988**  
12mm POCKET 70mm SLIM INTERLOCK HEAVY DUTY  
Mass. 2,131 Kg/m  
Anod. Per. 272  
Paint Per. 220

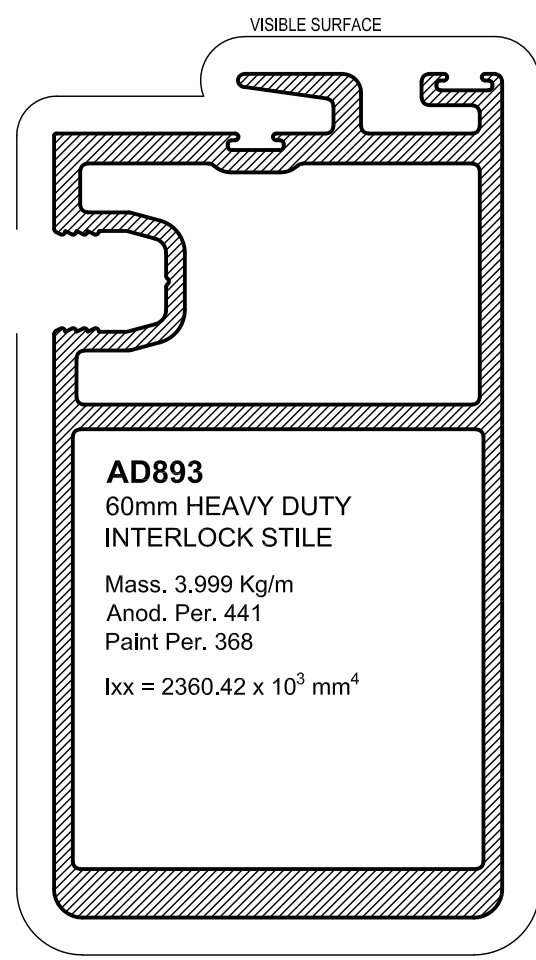


**AD893**  
60mm HEAVY DUTY INTERLOCK STILE  
Mass. 3,999 Kg/m  
Anod. Per. 441  
Paint Per. 368  
Ixx = 2360.42 x 10<sup>3</sup> mm<sup>4</sup>

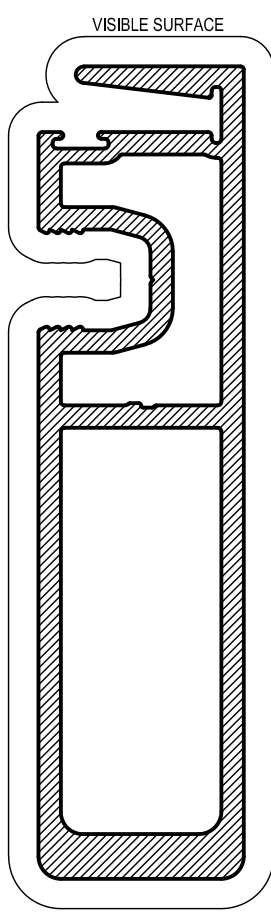


**AD983**  
12mm POCKET SLIM INTERLOCK HEAVY DUTY  
Mass. 2,761 Kg/m  
Anod. Per. 349  
Paint Per. 298  
Ixx = 102.19 x 10<sup>3</sup> mm<sup>4</sup>

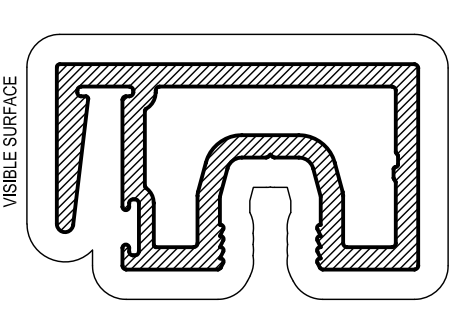


**AD980**  
12mm POCKET SLIM INTERLOCK  
Mass. 1,437 Kg/m  
Anod. Per. 231  
Paint Per. 231  
Ixx = 42.52 x 10<sup>3</sup> mm<sup>4</sup>

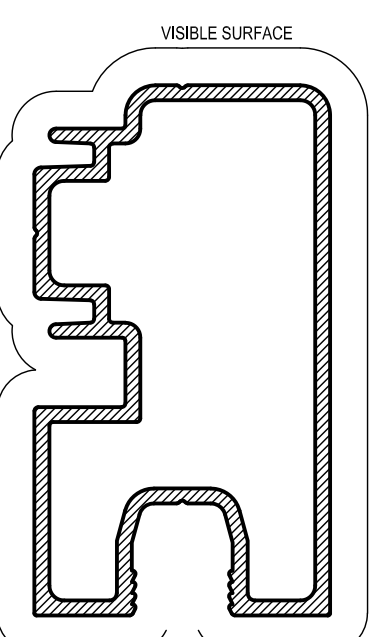

**AD771**  
90° CORNER MEETING STILE  
Mass. 1,482 Kg/m  
Anod. Per. 292  
Paint Per. 251  
Ixx = 115.48 x 10<sup>3</sup> mm<sup>4</sup>

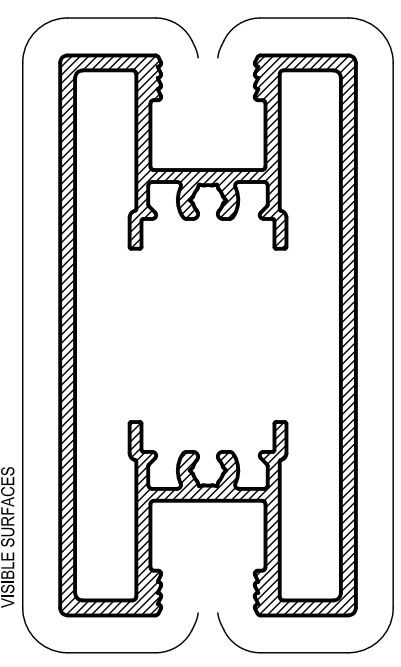


**AD869**  
MIDRAIL  
Mass. 1,855 Kg/m  
Anod. Per. 302  
Paint Per. 208

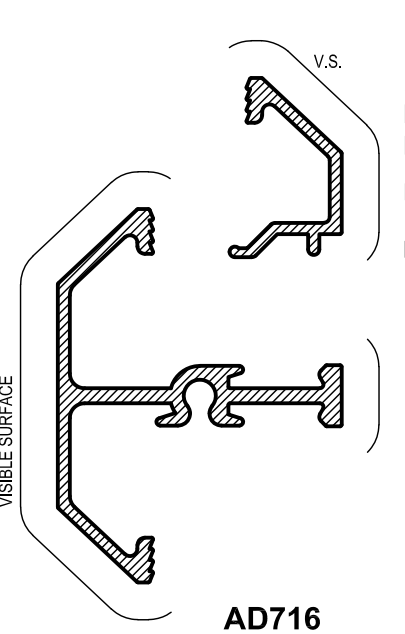


**AD716**  
PROGLIDE DOOR MIDRAIL  
Mass. 0,636 Kg/m  
Anod. Per. 251  
Paint Per. 100


### ON SITE GLAZED SG - 12mm POCKET

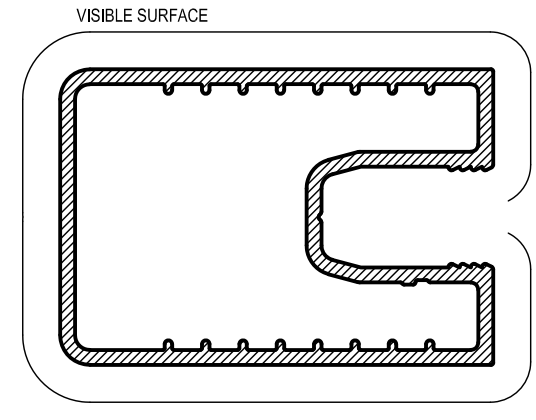


**AD845**  
OSG SG PLAIN LOCK STILE  
Mass. 1,290 Kg/m  
Anod. Per. 212  
Paint Per. 212  
Ixx = 106.10 x 10<sup>3</sup> mm<sup>4</sup>

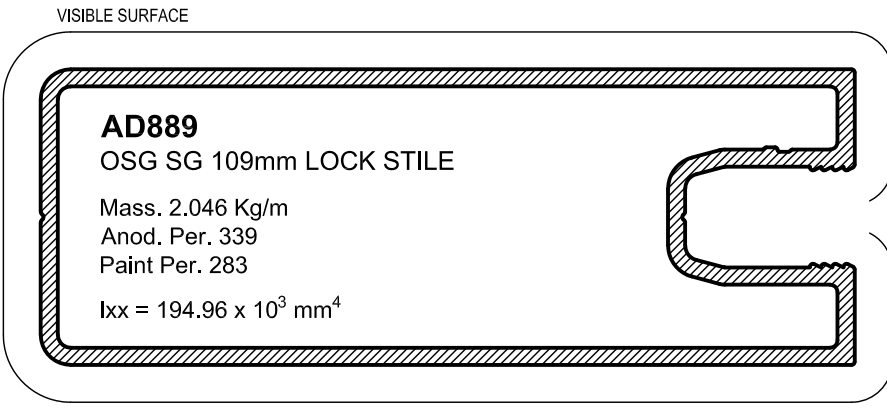


**AD889**  
OSG SG 109mm LOCK STILE  
Mass. 2,046 Kg/m  
Anod. Per. 339  
Paint Per. 283  
Ixx = 194.96 x 10<sup>3</sup> mm<sup>4</sup>

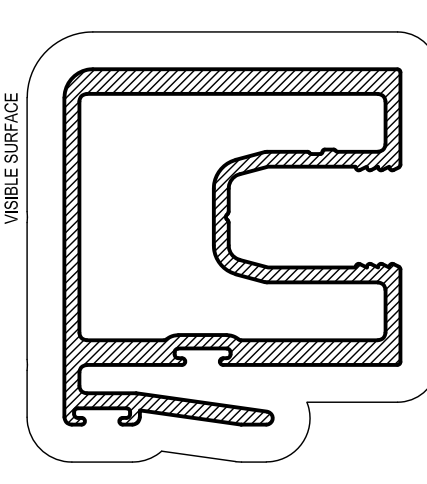


**AD844**  
OSG SG STD INTL STILE  
Mass. 1,574 Kg/m  
Anod. Per. 296  
Paint Per. 195  
Ixx = 152.90 x 10<sup>3</sup> mm<sup>4</sup>

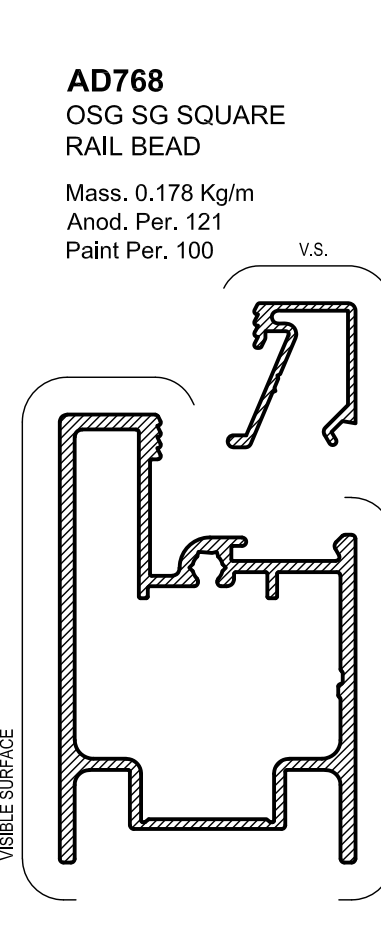


**AD768**  
OSG SG SQUARE RAIL BEAD  
Mass. 0,178 Kg/m  
Anod. Per. 121  
Paint Per. 100

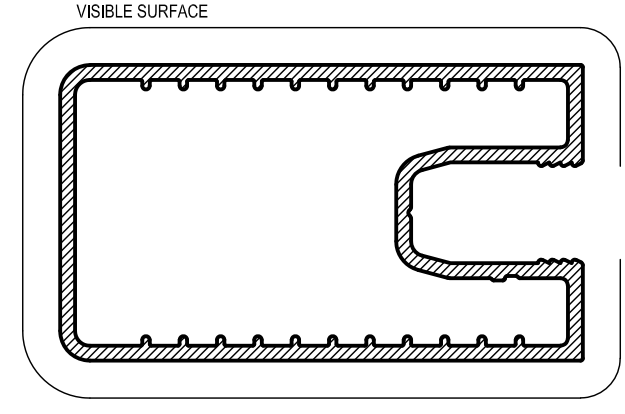


**AD895**  
OSG SG WIDE LOCK STILE  
Mass. 1,440 Kg/m  
Anod. Per. 238  
Paint Per. 228  
Ixx = 125.20 x 10<sup>3</sup> mm<sup>4</sup>

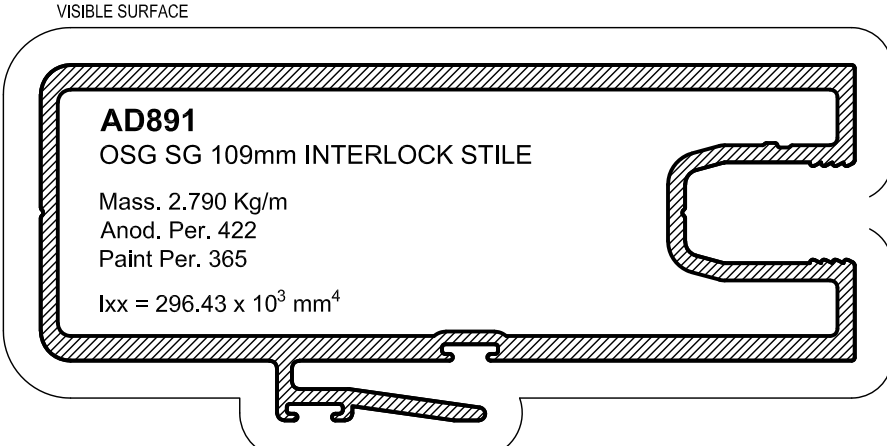


**AD891**  
OSG SG 109mm INTERLOCK STILE  
Mass. 2,790 Kg/m  
Anod. Per. 422  
Paint Per. 365  
Ixx = 296.43 x 10<sup>3</sup> mm<sup>4</sup>

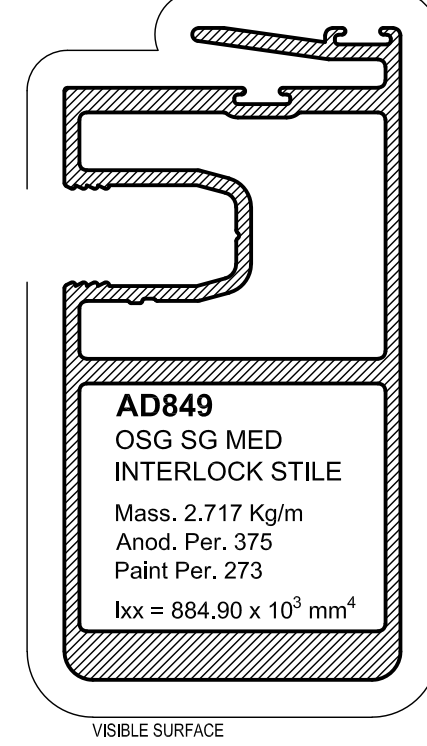


**AD849**  
OSG SG MED INTERLOCK STILE  
Mass. 2,717 Kg/m  
Anod. Per. 375  
Paint Per. 273  
Ixx = 884.90 x 10<sup>3</sup> mm<sup>4</sup>

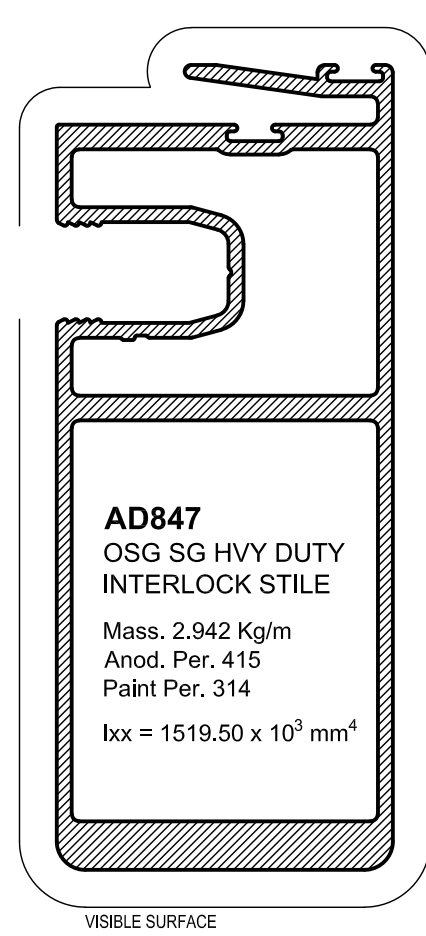

**AD847**  
OSG SG HVY DUTY INTERLOCK STILE  
Mass. 2,942 Kg/m  
Anod. Per. 415  
Paint Per. 314  
Ixx = 1519.50 x 10<sup>3</sup> mm<sup>4</sup>

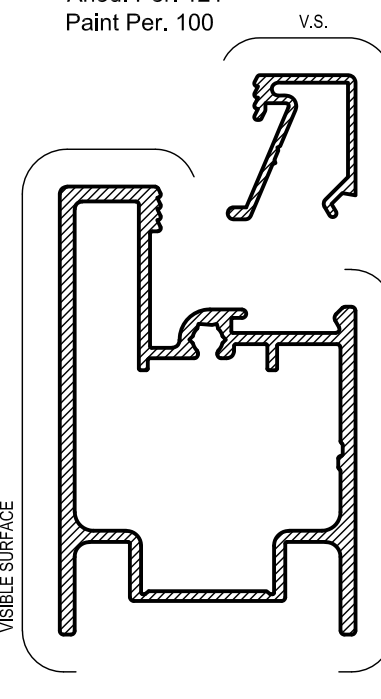

**AD767**  
OSG SG SQUARE RAIL  
Mass. 1,103 Kg/m  
Anod. Per. 258  
Paint Per. 122

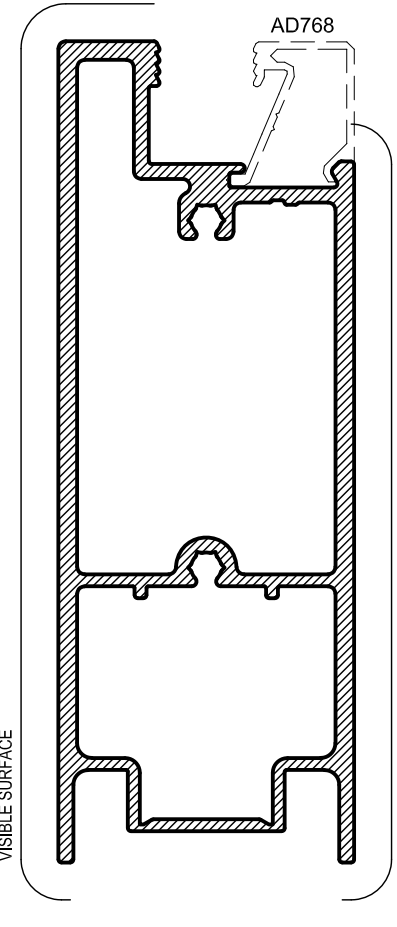


**AD890**  
OSG SG 110mm RAIL  
Mass. 2,202 Kg/m  
Anod. Per. 351  
Paint Per. 219




# ProGlide

## HIGH PERFORMANCE SLIDING DOOR


### 18mm POCKET

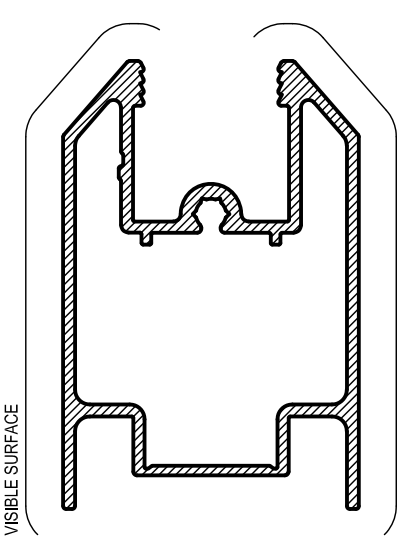


**AD826**  
RAIL (18mm POCKET)  
Mass. 1.124 Kg/m  
Anod. Per. 281  
Paint Per. 130

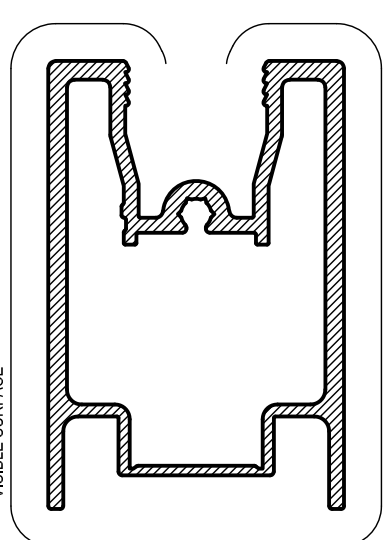


**AD867**  
SQUARE RAIL  
(18mm POCKET)  
Mass. 1.477 Kg/m  
Anod. Per. 283  
Paint Per. 146

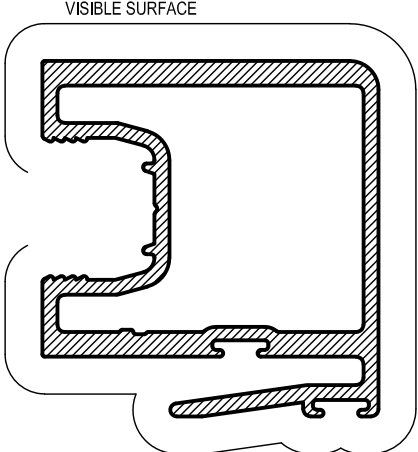


**AD825**  
STD INTERLOCK  
STILE (18mm POCKET)  
Mass. 1.496 Kg/m  
Anod. Per. 284  
Paint Per. 175  
Ixx = 153.63 x 10<sup>3</sup> mm<sup>4</sup>

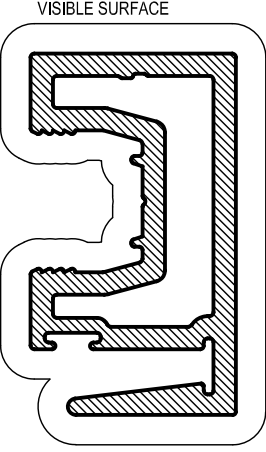


**AD981**  
18mm POCKET  
SLIM INTERLOCK  
Mass. 1.456 Kg/m  
Anod. Per. 236  
Paint Per. 236  
Ixx = 39.38 x 10<sup>3</sup> mm<sup>4</sup>

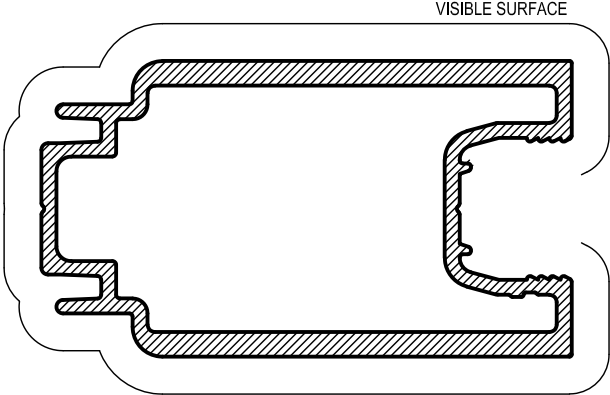


**AD913**  
MALE OXO MEETING  
STILE (18mm POCKET)  
Mass. 1.737 Kg/m  
Anod. Per. 272  
Paint Per. 198  
Ixx = 152.16 x 10<sup>3</sup> mm<sup>4</sup>

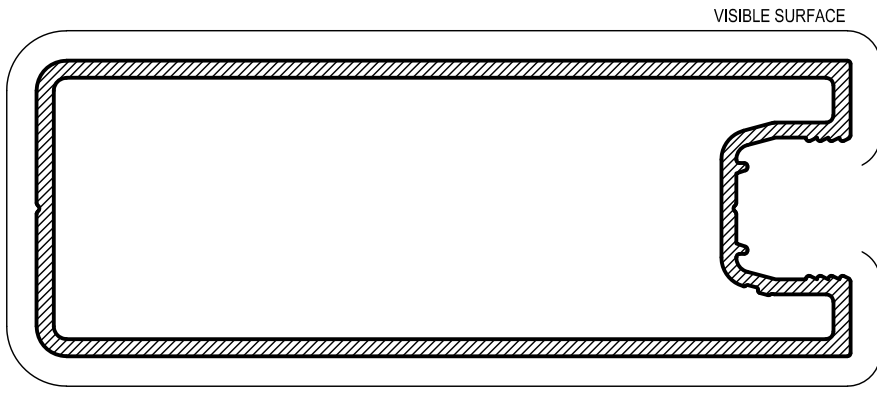


**AD842**  
109mm WIDE STILE (18mm POCKET)  
Mass. 1.924 Kg/m  
Anod. Per. 329  
Paint Per. 275  
Ixx = 194.82 x 10<sup>3</sup> mm<sup>4</sup>

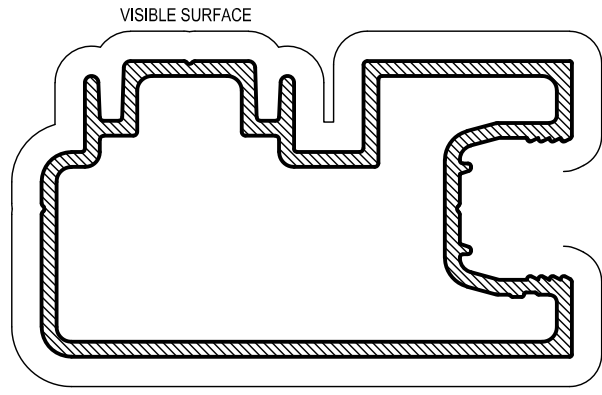


**AD770**  
90° CNR MEETING  
STILE (18mm POCKET)  
Mass. 1.491 Kg/m  
Anod. Per. 296  
Paint Per. 245  
Ixx = 118.29 x 10<sup>3</sup> mm<sup>4</sup>

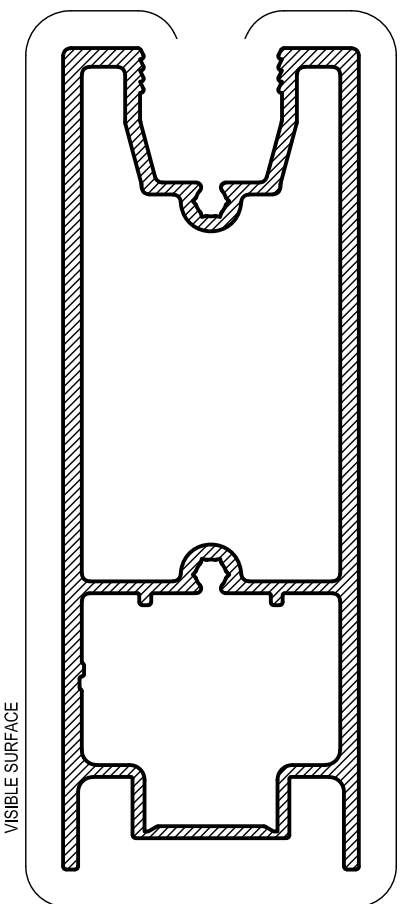


**AD912**  
110mm SQUARE RAIL  
(18mm POCKET)  
Mass. 2.309 Kg/m  
Anod. Per. 382  
Paint Per. 243

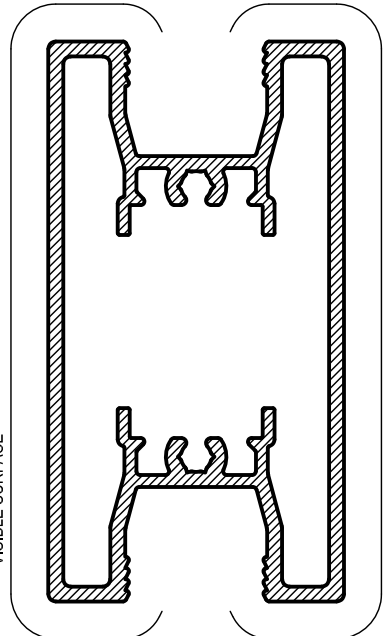


**AD911**  
75mm MIDRAIL  
(18mm POCKET)  
Mass. 1.778 Kg/m  
Anod. Per. 290  
Paint Per. 193

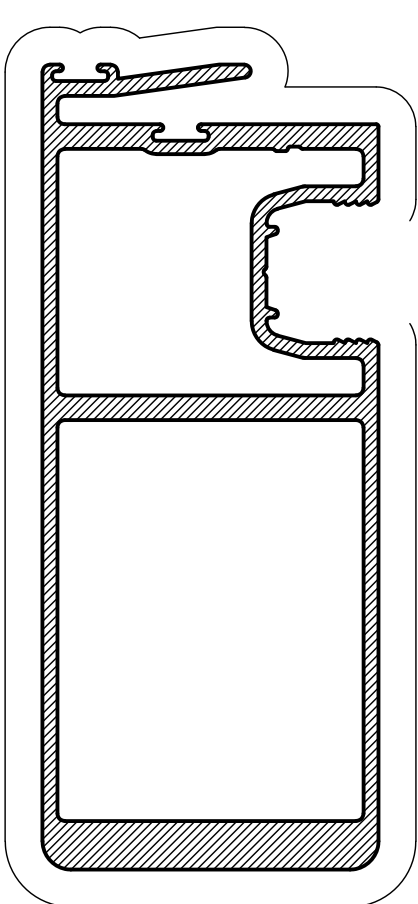


**AD823**  
H.D INTERLOCK STILE  
(18mm POCKET)  
Mass. 2.865 Kg/m  
Anod. Per. 403  
Paint Per. 293  
Ixx = 1498.38 x 10<sup>3</sup> mm<sup>4</sup>

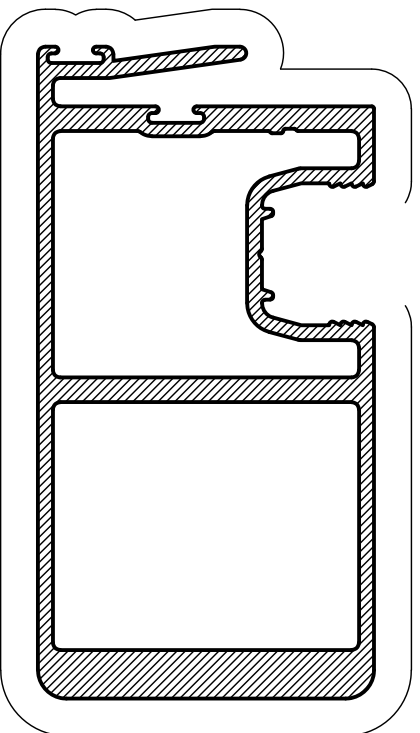


**AD822**  
MED INTERLOCK STILE  
(18mm POCKET)  
Mass. 2.643 Kg/m  
Anod. Per. 362  
Paint Per. 252  
Ixx = 875.49 x 10<sup>3</sup> mm<sup>4</sup>

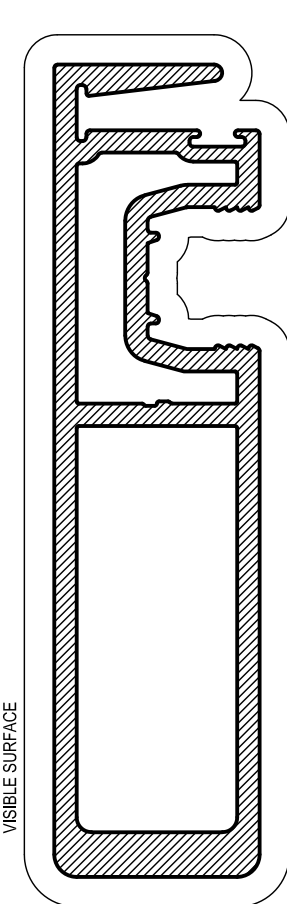


**AD984**  
18mm POCKET SLIM  
INTERLOCK HEAVY DUTY  
Mass. 2.776 Kg/m  
Anod. Per. 354  
Paint Per. 295  
Ixx = 99.41 x 10<sup>3</sup> mm<sup>4</sup>

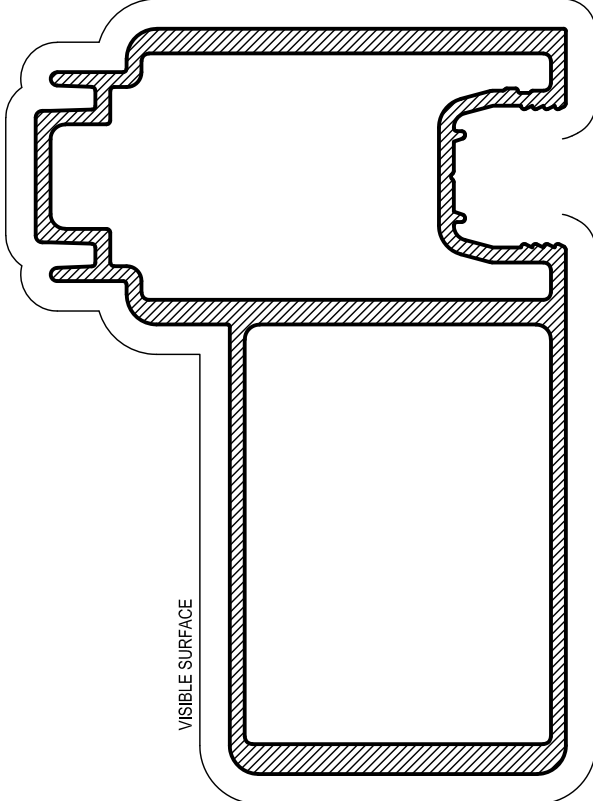


**AD776**  
HD OXO MALE MEETING  
STILE (18mm POCKET)  
Mass. 2.825 Kg/m  
Anod. Per. 389  
Paint Per. 338  
Ixx = 1216.36 x 10<sup>3</sup> mm<sup>4</sup>

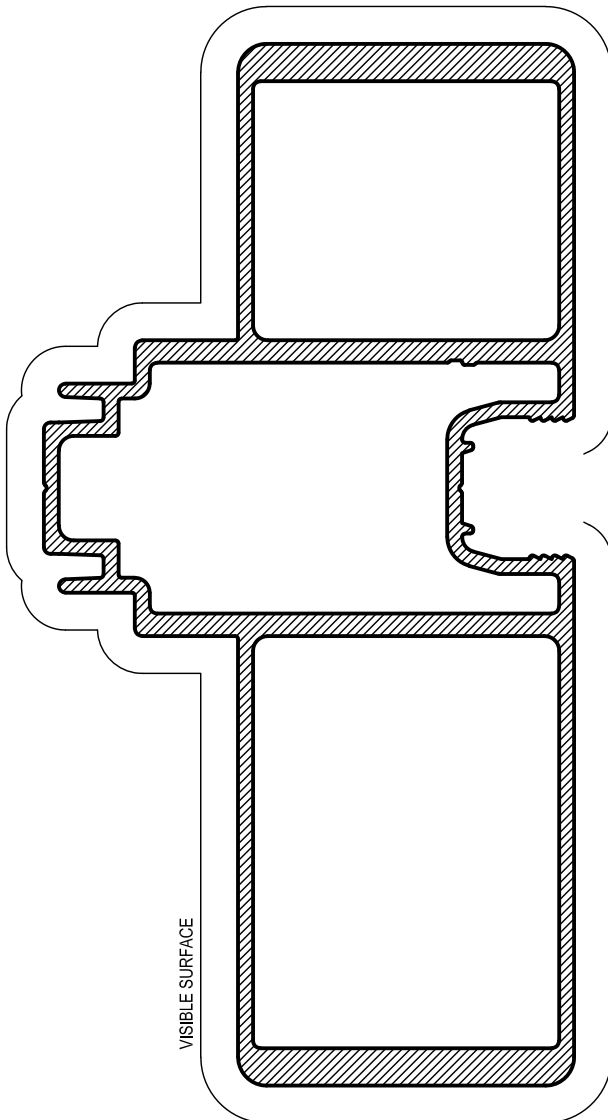


**AD870**  
XHD MALE MEETING  
STILE (18mm POCKET)  
Mass. 3.838 Kg/m  
Anod. Per. 468  
Paint Per. 416  
Ixx = 2863.45 x 10<sup>3</sup> mm<sup>4</sup>

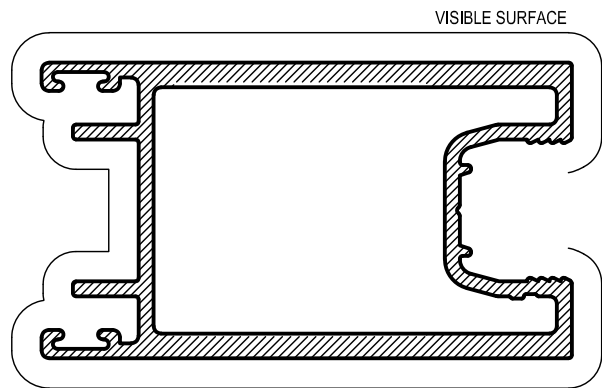


**AD766**  
FEMALE MEETING STILE (18mm POCKET)  
Mass. 1.810 Kg/m  
Anod. Per. 337  
Paint Per. 285  
Ixx = 168.01 x 10<sup>3</sup> mm<sup>4</sup>

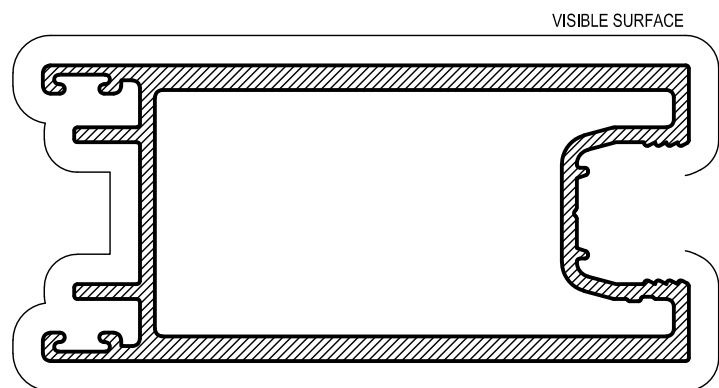

**AD927**  
WIDE FEMALE MEETING  
STILE SG (18mm POCKET)  
Mass. 2.087 Kg/m  
Anod. Per. 368  
Paint Per. 236  
Ixx = 201.87 x 10<sup>3</sup> mm<sup>4</sup>

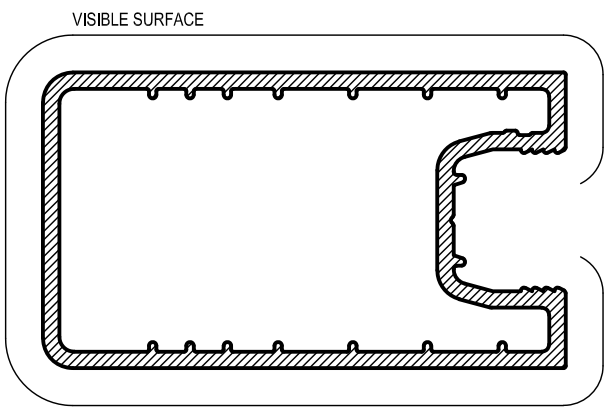


**AD922**  
70mm LOCK STILE  
(18mm POCKET)  
Mass. 1.462 Kg/m  
Anod. Per. 250  
Paint Per. 197  
Ixx = 133.56 x 10<sup>3</sup> mm<sup>4</sup>

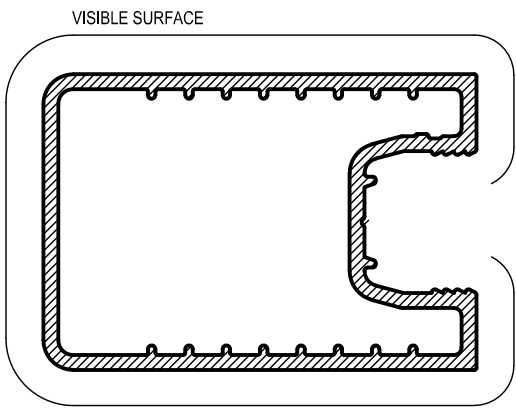


**AD824**  
STD LOCK STILE  
(18mm POCKET)  
Mass. 1.214 Kg/m  
Anod. Per. 226  
Paint Per. 173  
Ixx = 107.06 x 10<sup>3</sup> mm<sup>4</sup>



DOUBLE GLAZED - 33.5mm POCKET

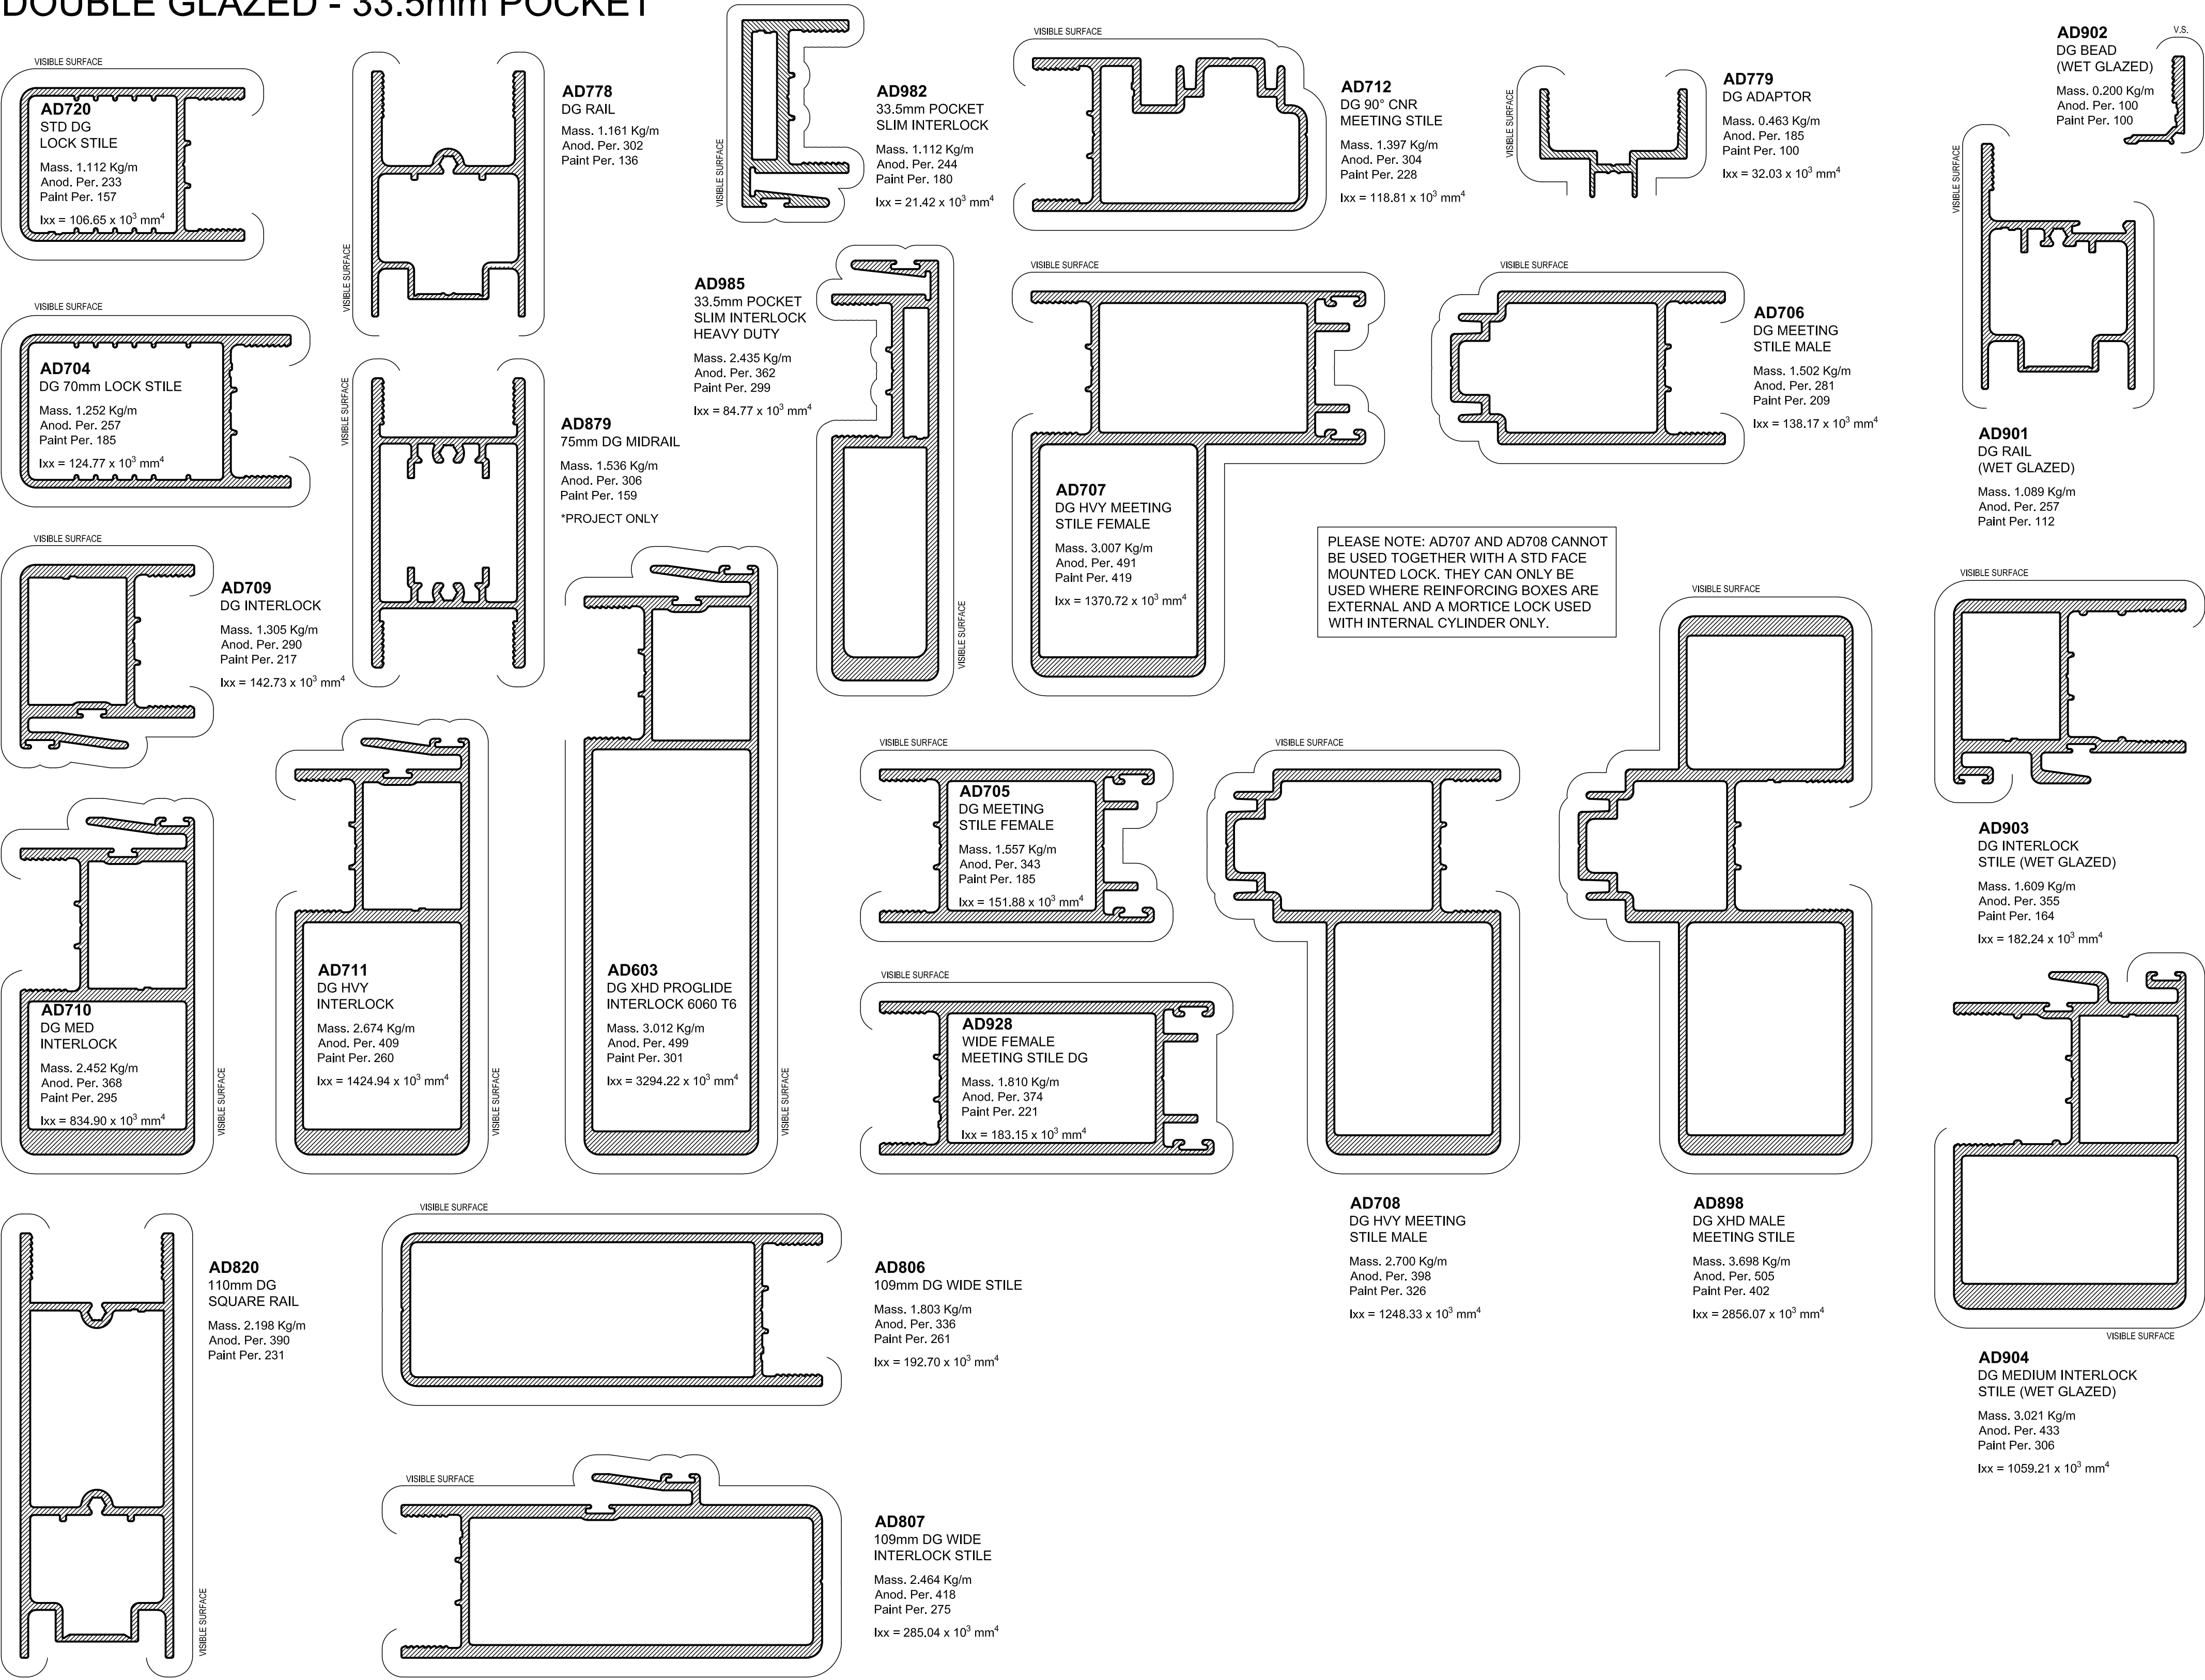

ON SITE GLAZED DG - 30mm POCKET

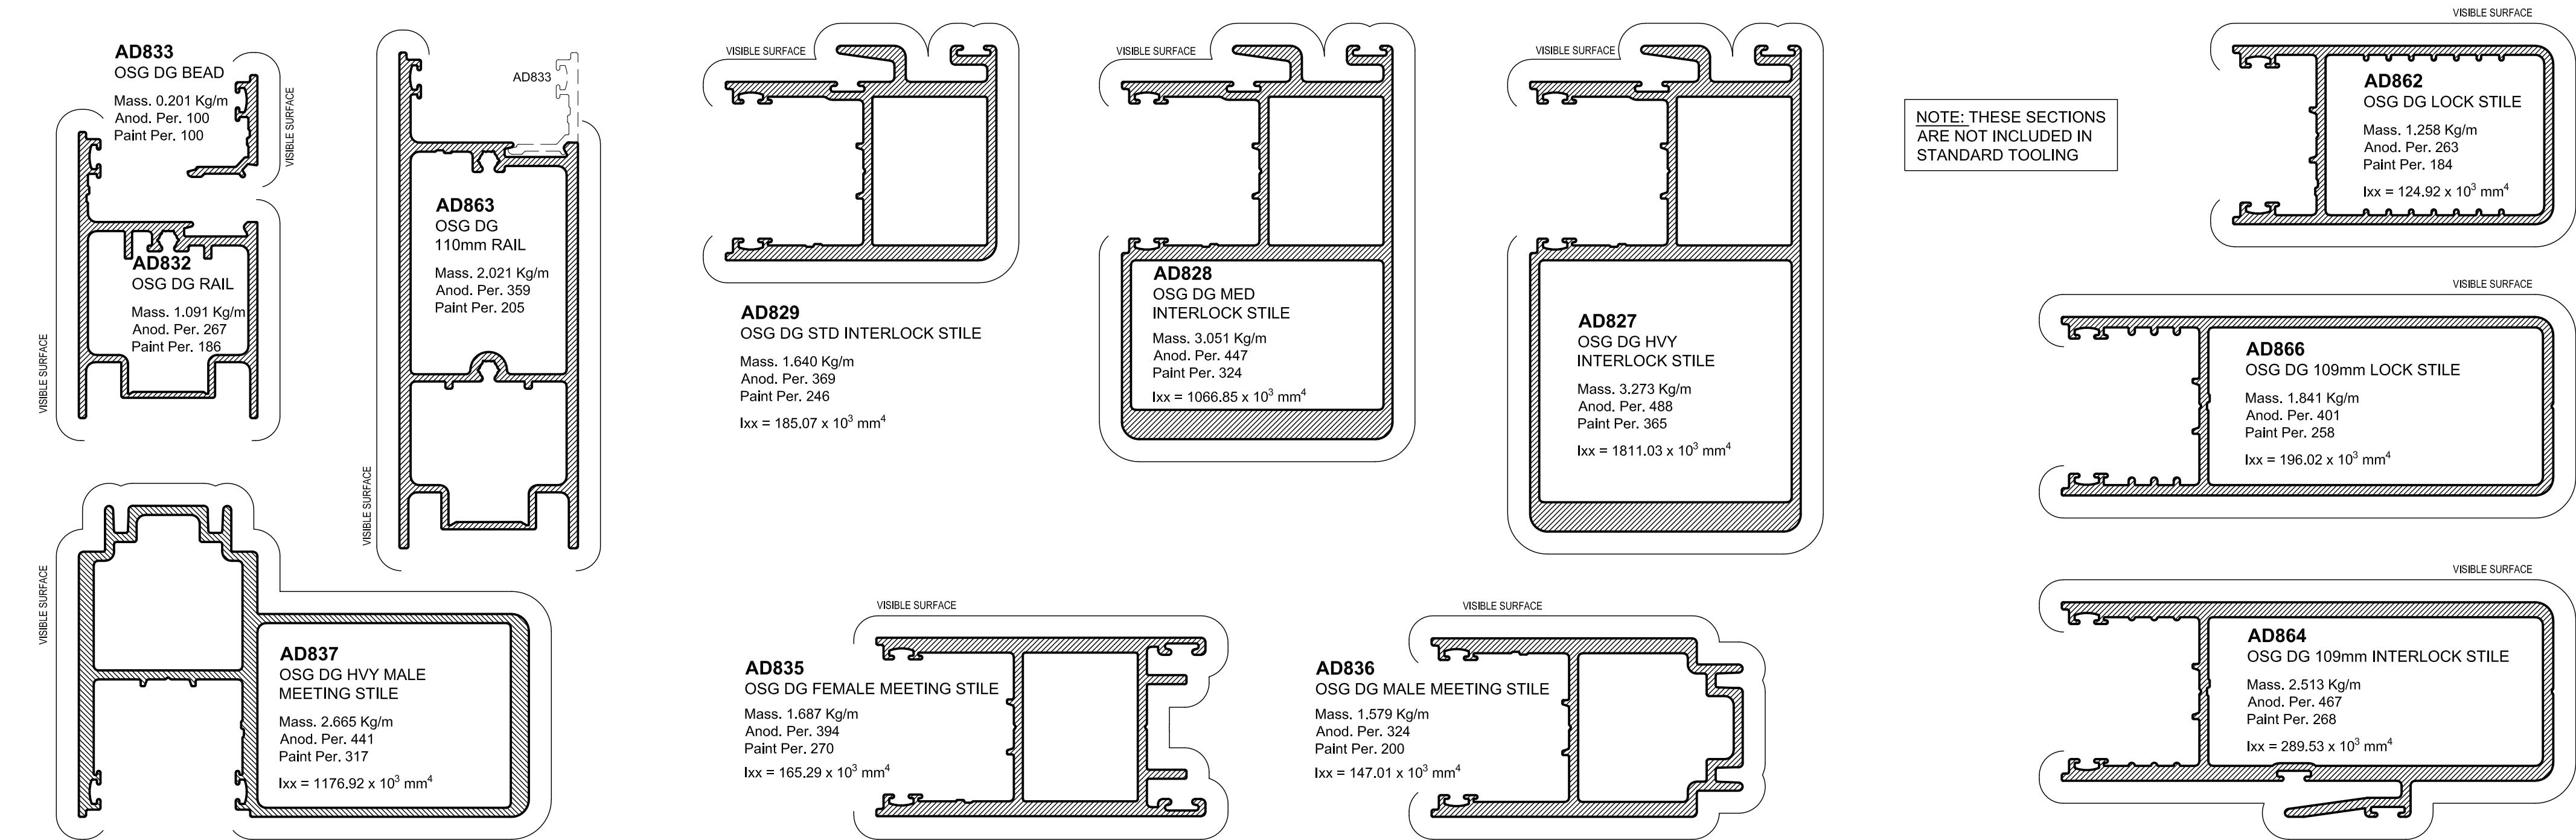



# ProGlide

## HIGH PERFORMANCE SLIDING DOOR

### SCREEN AND SUB SILL OPTIONS

