

SMOOTH, TROUBLE FREE OPERATION, WHILE KEEPING THE HARSH ELEMENTS OUT.




1300 ALSPEC (1300 257 732) alspec.com.au

Multi-Fold Door Range

Designed with large floor to ceiling applications in mind, the Hawkesbury Multi-Fold Door Range combine full sized commercial perimeter framing with specially designed commercial door stiles.

A functional alternative to traditional door units in lighter commercial and residential applications, the Hawkesbury E2 and E3 door range removes the barriers to allow flow between indoor and outdoor living. Whether the doors are opened or securely fastened into place as sturdy impenetrable walls, the Alspec Hawkesbury Door is the only choice.

Typical Configurations

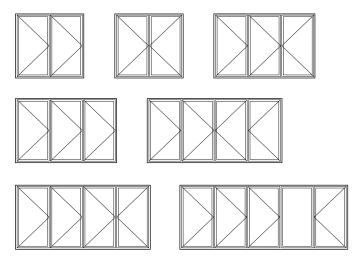

CAD Cross Sections





Key Features

- Smooth top-rolling operation
- Weatherseal technology keeps wind, rain and cold air where it belongs
- The stabilising centre hinge controls door stile deflection and bowing on tall doors
- Surelock[™] system allows for simple vertical height adjustment when needed
- Uncompromised security with flush bolts and proprietary door furniture
- Accepts from 6mm 13.5mm single glazed and up to 28mm double glazed units, allowing the designer to achieve the most demanding thermal and acoustic specifications
- Concealed carriers under door panels minimising open tracks for debris to collect

Technical Specifications

Frame Dimensions	
Option 1	101.6 x 44.5mm
Maximum Recommended Sizes	
Height	3000mm
Width	1000mm E2A/1200mm E3A
Weight	60kg E2A / 115kg E3A
Acoustic Performance Glass Type	e Rw (C; C _{tr})
6.38mm Laminate	29 dB
10.38mm/ 12/ 6.38mm IGU	34 (25mm Optilam IGU) dB
Thermal Performance	
Uw range SG	4.4 - 6.2
SHGC range SG	0.26 - 0.59
Uw range DG	3.2 - 4.0
SHGC range DG	0.15 - 0.51
Glazing Details	
Single Glazed	6 - 13.5mm
Double Glazed	18 - 28mm
Compatible Systems	
McArthur Evo Centre Pocket Framing	
Hunter Evo Flush Glazed Framing	

ecoFRAMEplus Centre Pocket Double Glazed Framing







