

CUSTOMER TECHNICAL MEMO # 248

Subject: FS6 FACE FIT FLYSCREEN


Date: September 2015

A new face fit flyscreen (FS6) has been introduced that will allow a 10mm offset from the front face of a frame.

The new FS6 face fit flyscreen will allow clearance generally for a 152mm louvre blades within a 102mm frame to fully open and operate. This FS6 can be retained on the frame with the use of multiple "Swivel Clips 11mm Clear" (1320032) to hold the screen in position and remove when needed.

FS2C-A Corner stakes (1324001) are required to assemble this FS6 frame. Standard 6mm spline is used to retain the fibreglass mesh in place.

Code	Description	AP	PP
1867624	FS6 FACE FIT FLYSCREEN	104	100

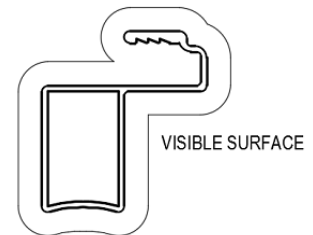


The option is available in AIQ/V6 and shall be added as part of the next Door & Screening Wall chart update.


If you have any questions please do not hesitate to contact your ALSPEC Sales Office or Area Manager.

Extrusions

FS6 FACE FIT FLYSCREEN
Anod. Per. 104
Paint Per. 100

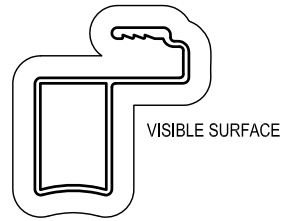

ASSEMBLY DETAIL

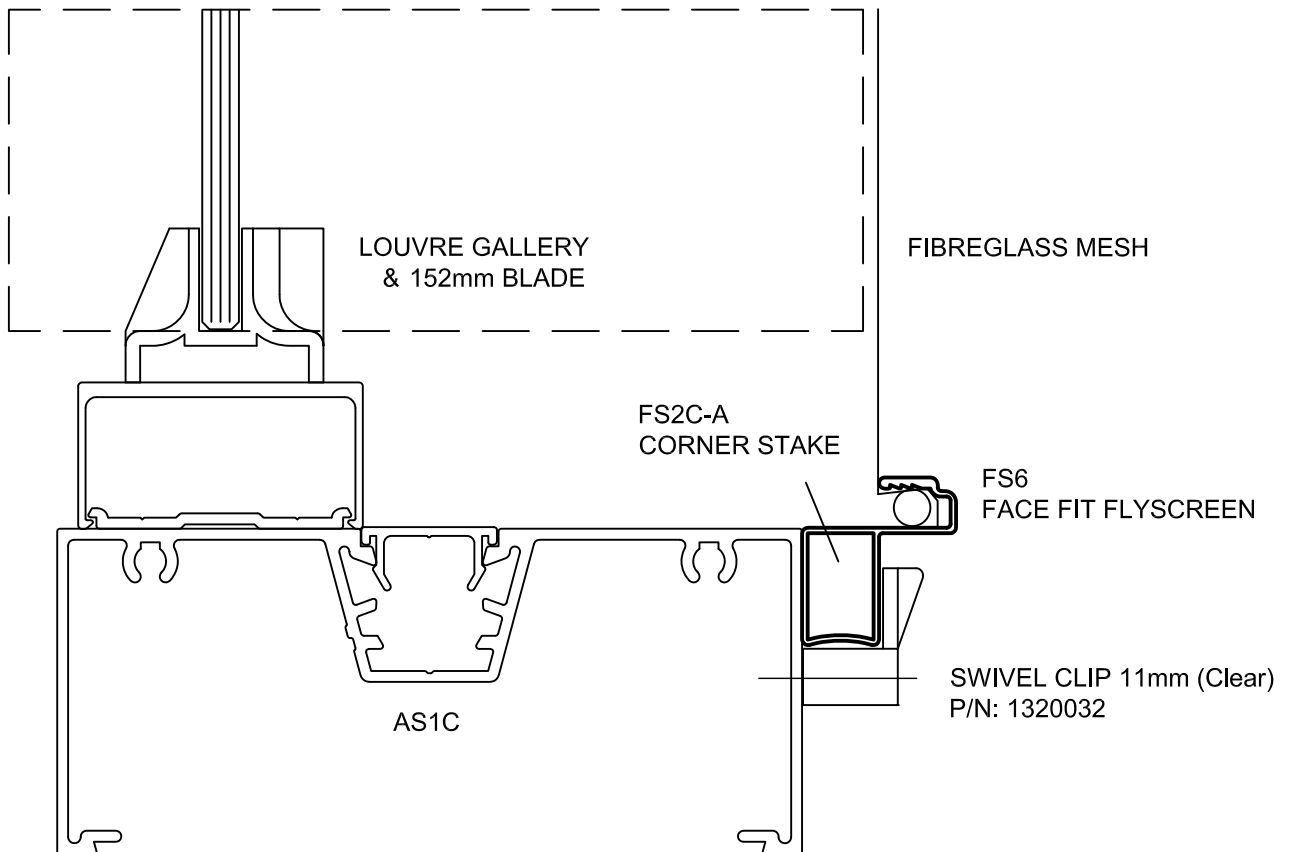

EXTRUSION ARE DESIGN PROTECTED & NOT TO SCALE