

BEFORE YOU START:


ENSURE THE DOOR OPENS AND CLOSSES FREELY.

The instructions illustrate a left-handed door installation. The door closer is non-handed and can be installed on doors either on left or right-handed orientation.




1. FIX JAMB BRACKET

Install the Jamb Bracket on the hinged side of the door jamb, positioning it approximately 35mm below the top of the door jamb and about 25mm (or at least 18mm) inward from the door face.

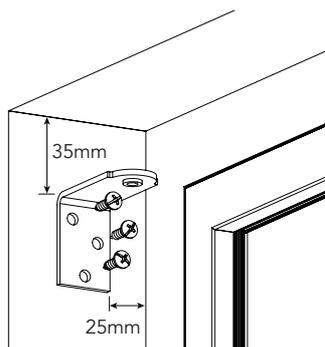

2. CONNECT ROD JAMB


Attach the Rod to the Jamb Bracket using the Locking Bolt, but do not tighten the nut and washer yet.

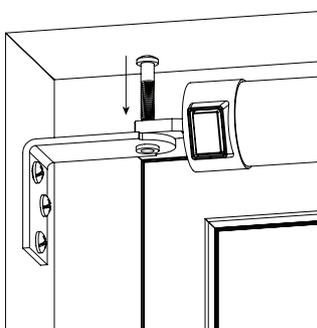

3. ADD DOOR BRACKET

Insert the Door Bracket onto the end of the Door Closer's footing. Close and latch the door.

Align the Closer with the Door Bracket against the door surface, ensuring it is level.

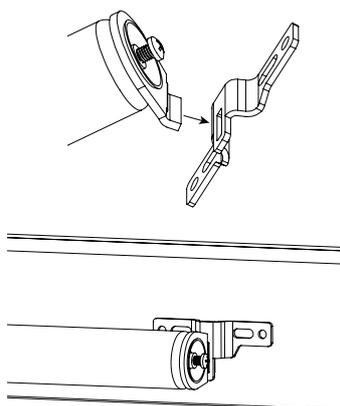


4. FIXING DOOR BRACKET

When positioning the screws, note that Slot (A) is the elongated hole farthest from the door hinge, and Slot (B) is the circular hole closest to the hinge.

HINGE ON LEFT SIDE
HINGE ON RIGHT SIDE


- While the closer is in place and level, secure the bracket to the door using a 19mm screw through the center of the elongated Slot (A).
- Then, remove the closer from the jamb and door brackets, and secure it into Slot (B) using another 19mm screw.

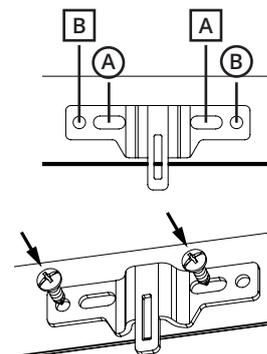

Example: Viewed from inside, hinge on left side

5. SECURE CLOSER

Reattach the closer by inserting the foot into the door bracket first, then fixing the Rod to the Jamb Bracket using the Locking Bolt, ensuring it's tightened with the washer and nut, but not excessively.

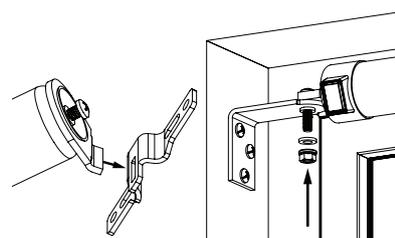

6. CLOSER SPEED ADJUSTMENT

To adjust the closer's speed, turn the screw clockwise for slower operation and counterclockwise for faster operation.

