

# SCAFFOLD PLANKS



# Alspec Scaffold Planks


The Alspec Scaffold Planks have a unique hollow box profile with internal stiffening ribs, anti-slip top surface with rubber insert strips and cast end caps.

Measuring in at 227mm wide x 46mm thick, Alspec Scaffold Planks boast unparalleled strength and safety while remaining highly cost effective. They are tough, long lasting, lightweight and versatile.

## Key Features

Aluminium is corrosion resistant, splinterproof, rotproof and non-combustible. An aluminium plank is non-porous and does not soak up oil. Being metal, it is easily cleaned with water or solvents.

## Australian Standards

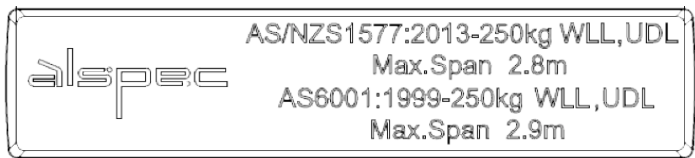

Alspec Scaffold Planks with a nominal span of 2.8m or less have been load tested and have passed the test for a Working Load Limit (WLL) of 250 Kilograms and comply with the requirements for:

Stiffness	AS/NZS 1577-2013 Appendix A & AS 6001-1999 Clause 3.1
Strength	AS/NZS 1577-2013 Appendix B
Sliding	AS/NZS 1577-2013 Appendix C
Coefficient of Friction	AS/NZS 1577-2013 Appendix D

## Product Profiles

