


ProGlide


HIGH PERFORMANCE SLIDING DOOR

alspec[®]
EVERYTHING ALUMINIUM & HARDWARE


DOUBLE TRACK FRAMING

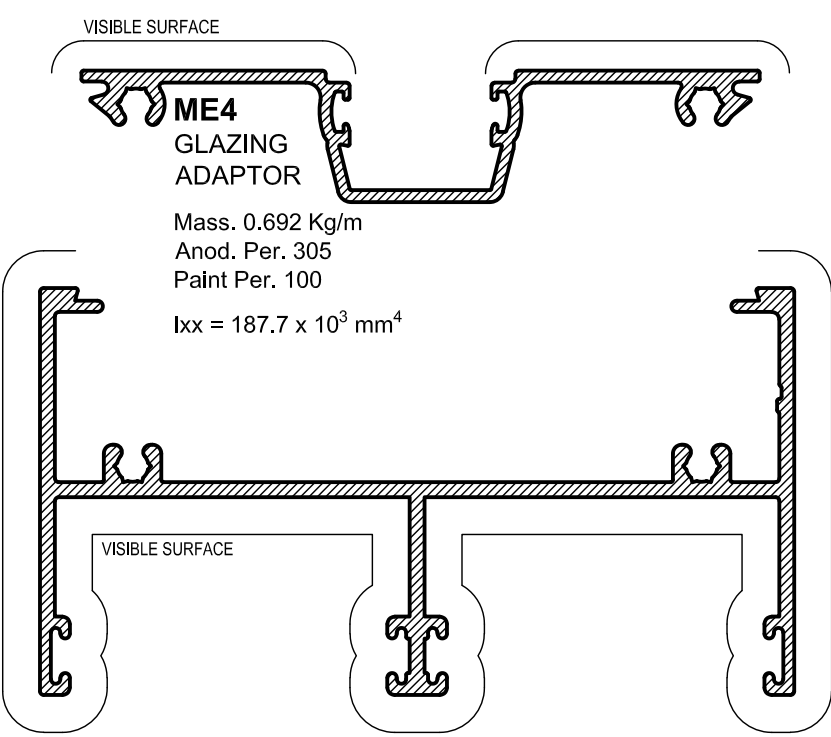


ME4
GLAZING
ADAPTOR
Mass. 0.692 Kg/m
Anod. Per. 305
Paint Per. 100
Ixx = 187.7 x 10³ mm⁴

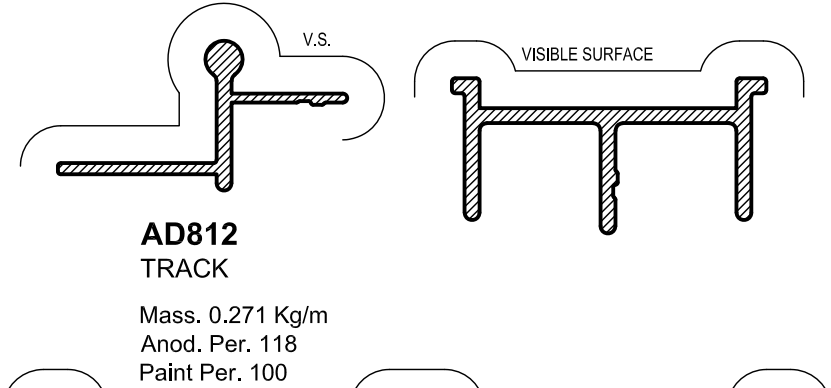


AD812
TRACK
Mass. 0.271 Kg/m
Anod. Per. 118
Paint Per. 100

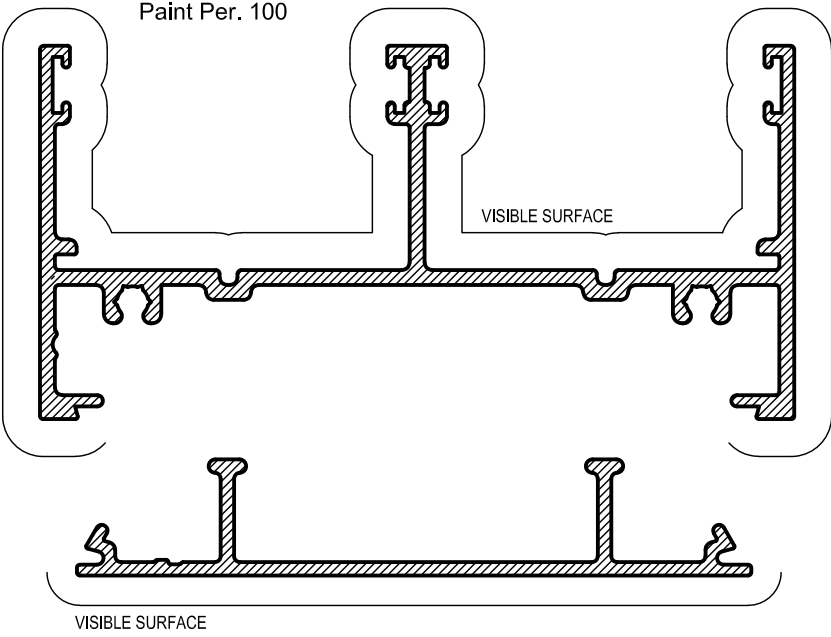


AD810S
DOUBLE
TRACK SILL
Mass. 1.606 Kg/m
Anod. Per. 595
Paint Per. 402

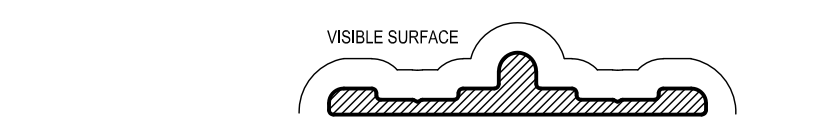

AD775
PLANT ON TRACK
Mass. 0.442 Kg/m
Anod. Per. 117
Paint Per. 100

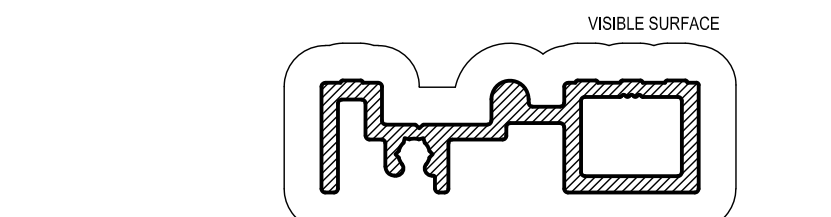


AD784
SINGLE RECESSED
ADD ON TRACK
Mass. 0.754 Kg/m
Anod. Per. 197
Paint Per. 100

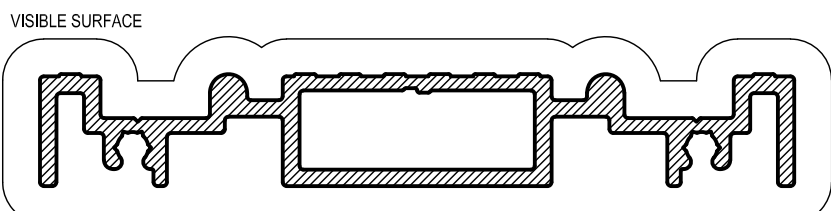


AD783
RECESSED
DOUBLE TRACK
Mass. 1.383 Kg/m
Anod. Per. 366
Paint Per. 165

AD841
DOUBLE HEAD
/JAMB
Mass. 1.549 Kg/m
Anod. Per. 584
Paint Per. 359
Ixx = 829.30 x 10³ mm⁴
Iyy = 104.80 x 10³ mm⁴


AD813
FIXED PANEL
SUPPORT
Mass. 0.491 Kg/m
Anod. Per. 181
Paint Per. 100

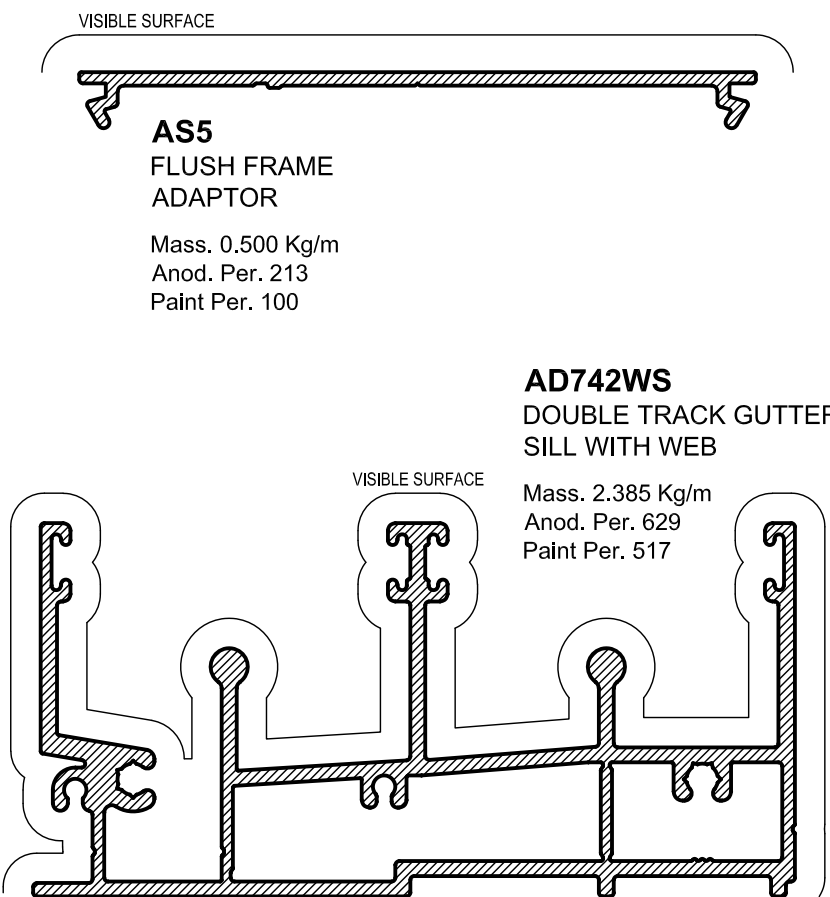


AS5
FLUSH FRAME
ADAPTOR
Mass. 0.500 Kg/m
Anod. Per. 213
Paint Per. 100

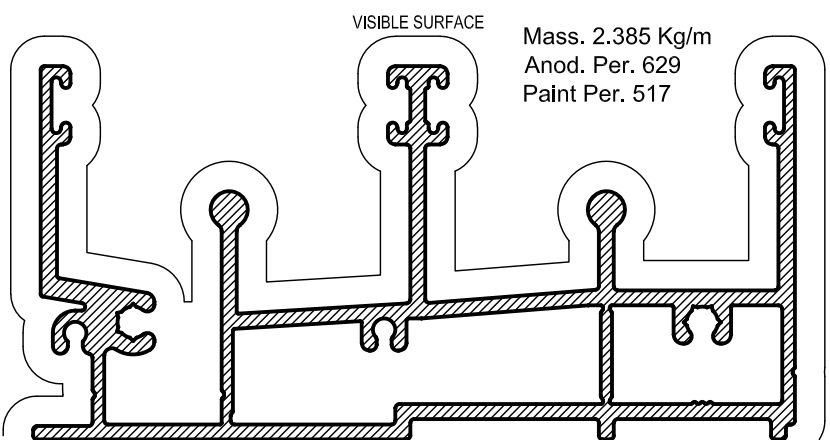


AD742WS
DOUBLE TRACK GUTTER
SILL WITH WEB
Mass. 2.385 Kg/m
Anod. Per. 629
Paint Per. 517

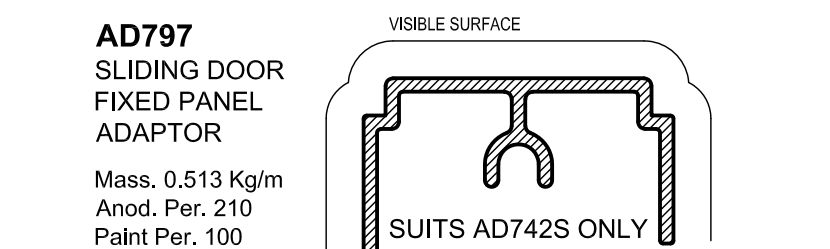


AD797
SLIDING DOOR
FIXED PANEL
ADAPTOR
Mass. 0.513 Kg/m
Anod. Per. 210
Paint Per. 100

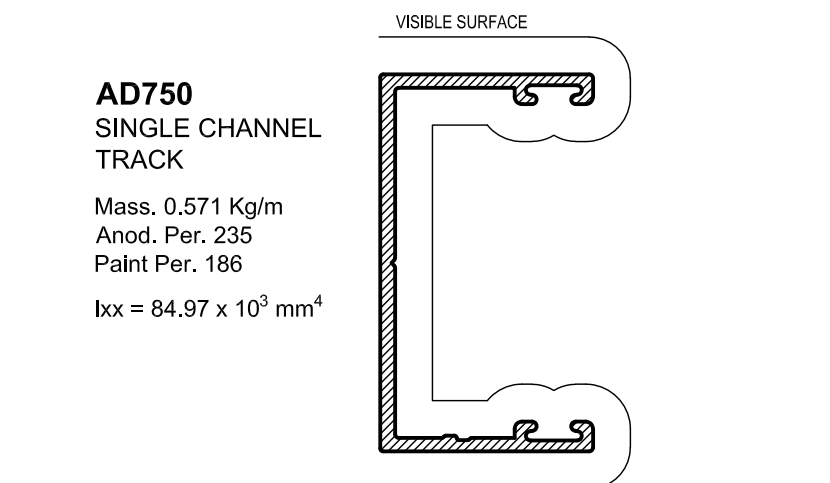


AD750
SINGLE CHANNEL
TRACK
Mass. 0.571 Kg/m
Anod. Per. 235
Paint Per. 186
Ixx = 84.97 x 10³ mm⁴

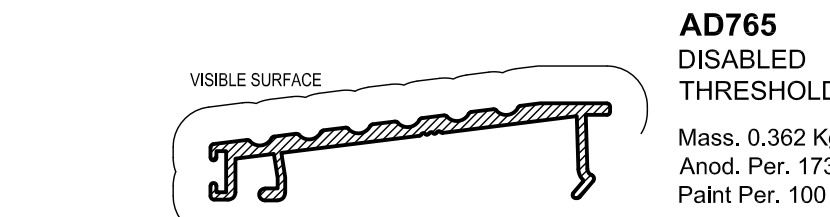


AD765
DISABLED
THRESHOLD
Mass. 0.362 Kg/m
Anod. Per. 173
Paint Per. 100

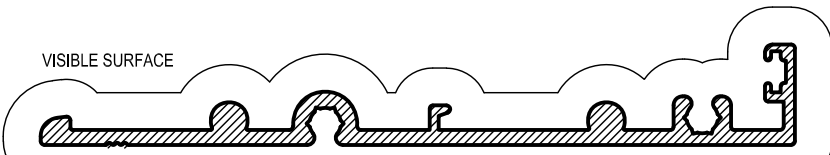


AD762
DISABLED SILL
Mass. 0.822 Kg/m
Anod. Per. 299
Paint Per. 189

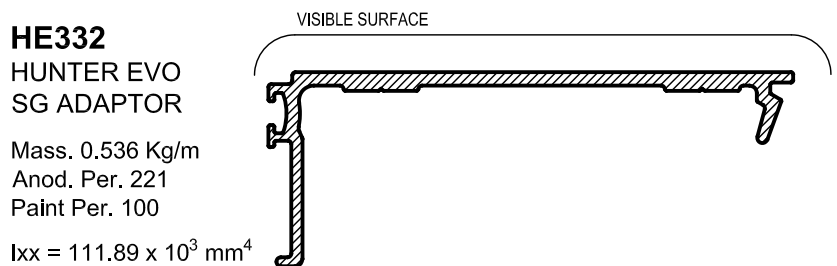


HE332
HUNTER EVO
SG ADAPTOR
Mass. 0.536 Kg/m
Anod. Per. 221
Paint Per. 100
Ixx = 111.89 x 10³ mm⁴

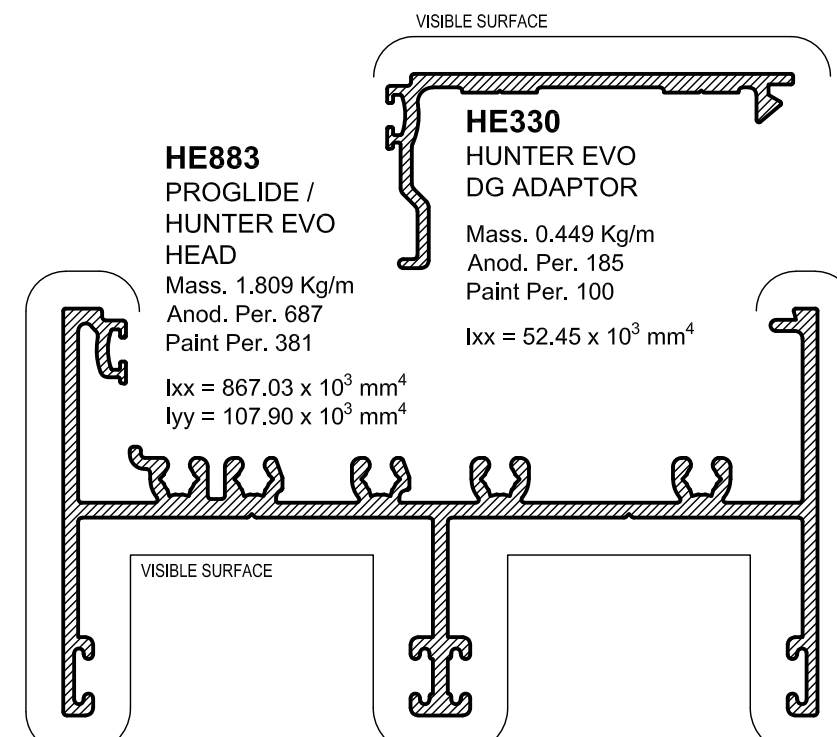


HE883
PROGLIDE /
HUNTER EVO
HEAD
Mass. 1.809 Kg/m
Anod. Per. 687
Paint Per. 381
Ixx = 867.03 x 10³ mm⁴
Iyy = 107.90 x 10³ mm⁴

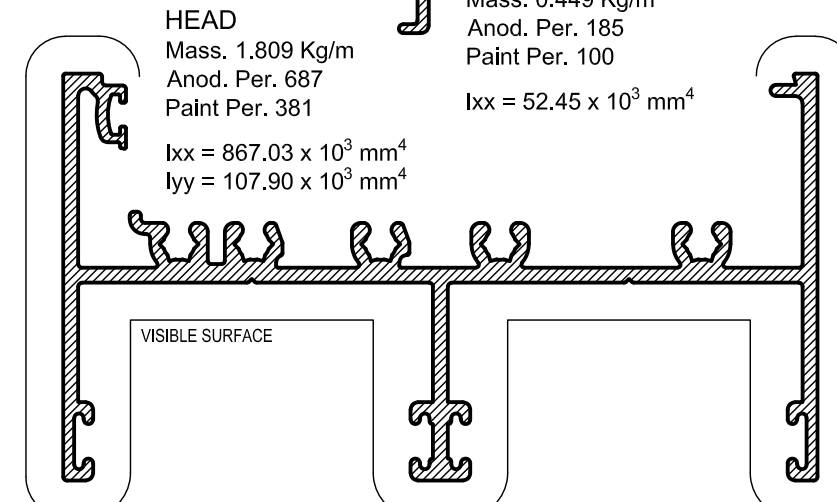


HE330
HUNTER EVO
DG ADAPTOR
Mass. 0.449 Kg/m
Anod. Per. 185
Paint Per. 100
Ixx = 52.45 x 10³ mm⁴

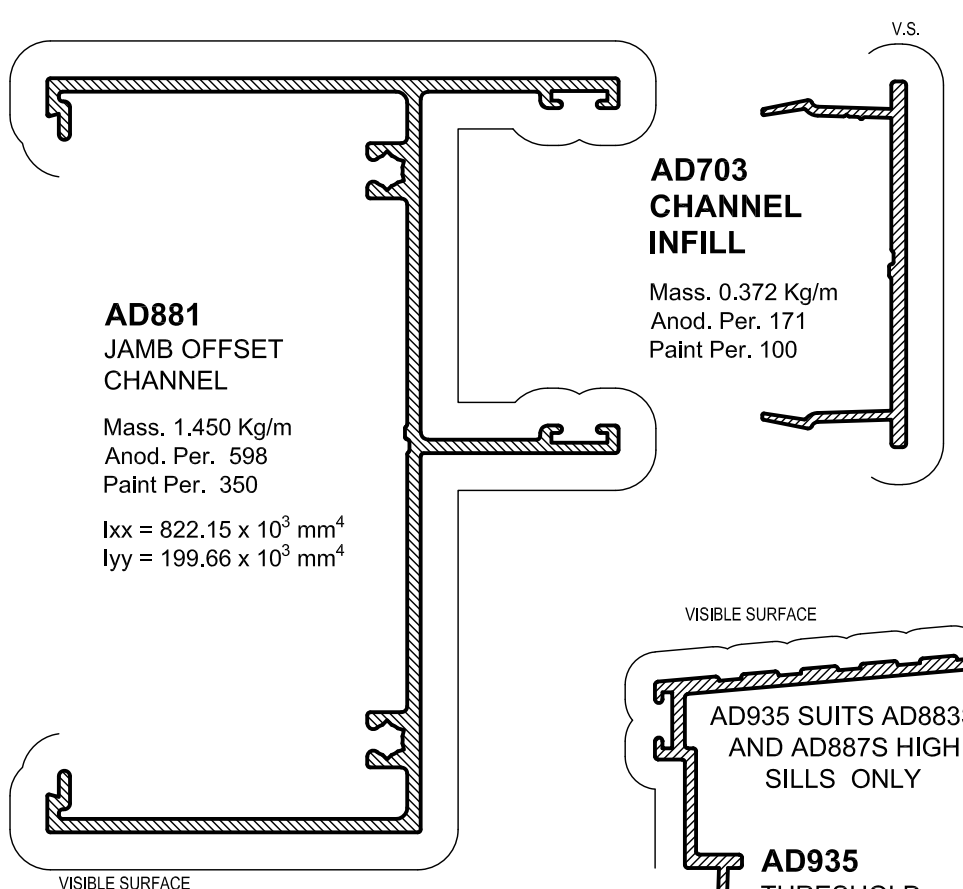


AD703
CHANNEL
INFILL
Mass. 0.372 Kg/m
Anod. Per. 171
Paint Per. 100

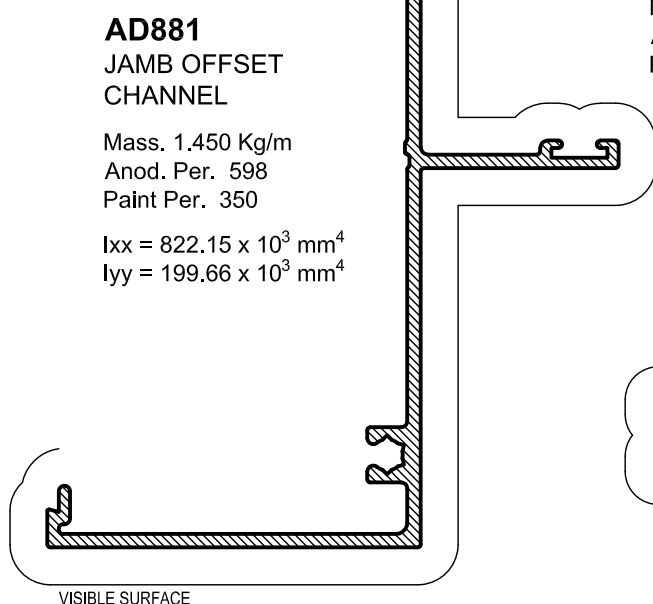


AD881
JAMB OFFSET
CHANNEL
Mass. 1.450 Kg/m
Anod. Per. 598
Paint Per. 350
Ixx = 822.15 x 10³ mm⁴
Iyy = 199.66 x 10³ mm⁴

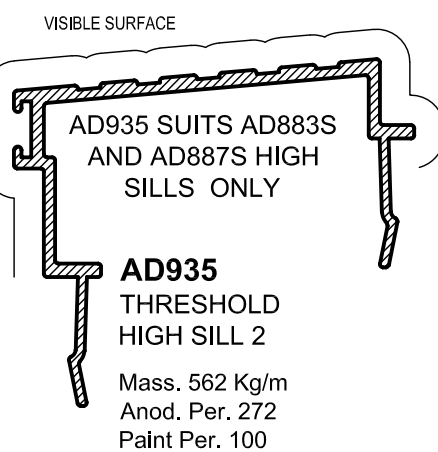


AD935
THRESHOLD
HIGH SILL 2
Mass. 562 Kg/m
Anod. Per. 272
Paint Per. 100

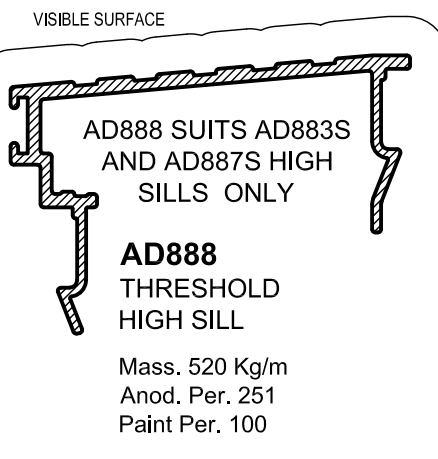


AD888
THRESHOLD
HIGH SILL
Mass. 520 Kg/m
Anod. Per. 251
Paint Per. 100

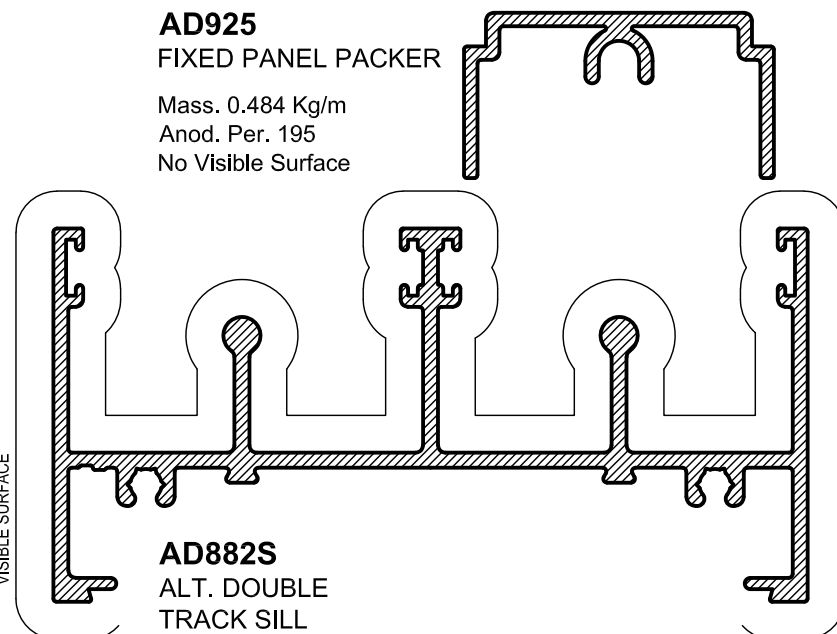


AD925
FIXED PANEL
PACKER
Mass. 0.484 Kg/m
Anod. Per. 195
No Visible Surface

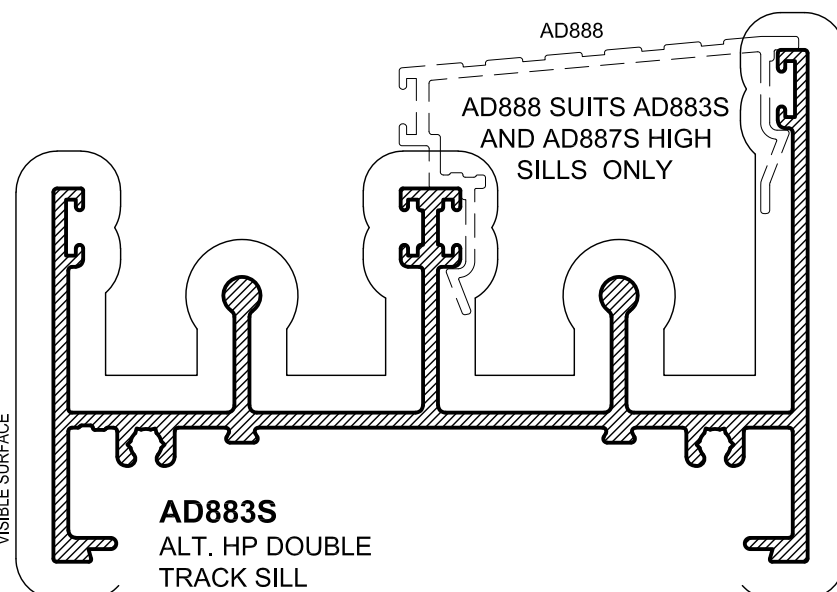


AD882S
ALT. DOUBLE
TRACK SILL
Mass. 1.828 Kg/m
Anod. Per. 659
Paint Per. 462

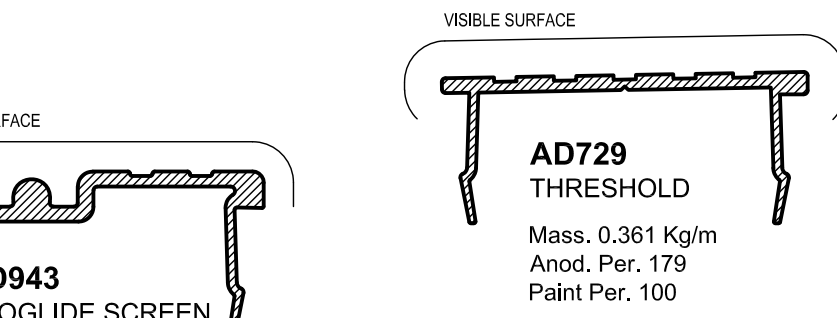

AD883S
ALT. HP DOUBLE
TRACK SILL
Mass. 1.928 Kg/m
Anod. Per. 696
Paint Per. 499

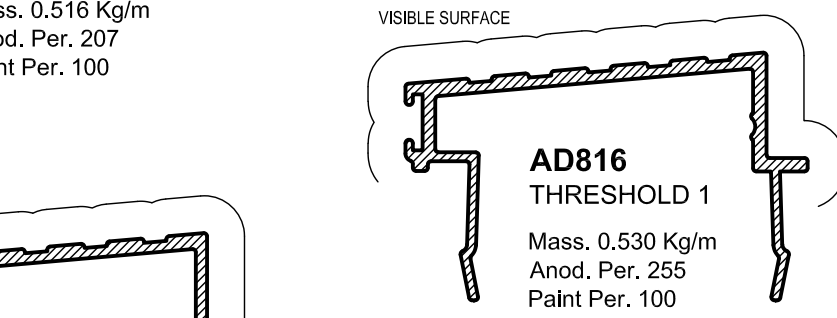


AD816
THRESHOLD 1
Mass. 0.530 Kg/m
Anod. Per. 255
Paint Per. 100

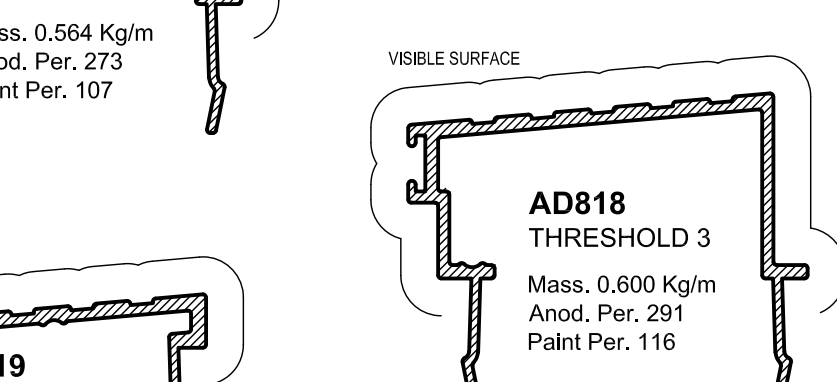


AD818
THRESHOLD 3
Mass. 0.600 Kg/m
Anod. Per. 291
Paint Per. 116

150.3mm TRIPLE TRACK FRAMING


USE THESE SECTIONS WHEN COUPLING TO McARTHUR EVO 150mm, ecoFRAMEplus 150mm & HUNTER EVO 150mm FRAMING
NOTE: 150.3mm FRAMING IS NOT COMPATIBLE WITH STANDARD PUNCH TOOLING

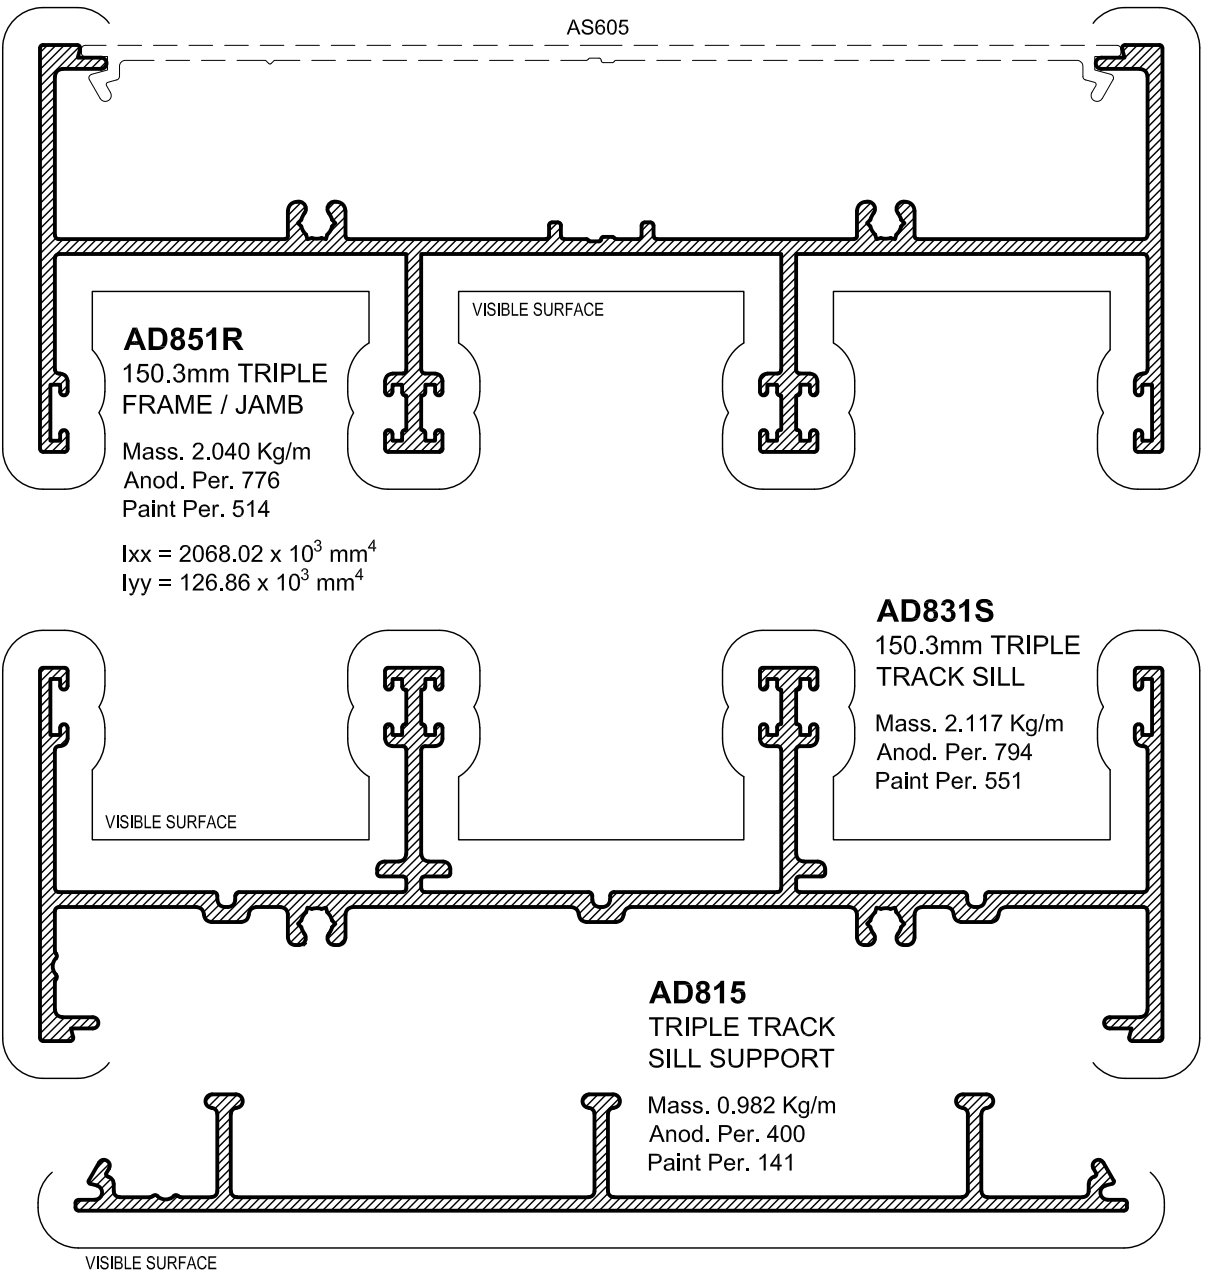


AD851R
150.3mm TRIPLE
FRAME / JAMB
Mass. 2.040 Kg/m
Anod. Per. 776
Paint Per. 514
Ixx = 2068.02 x 10³ mm⁴
Iyy = 126.86 x 10³ mm⁴

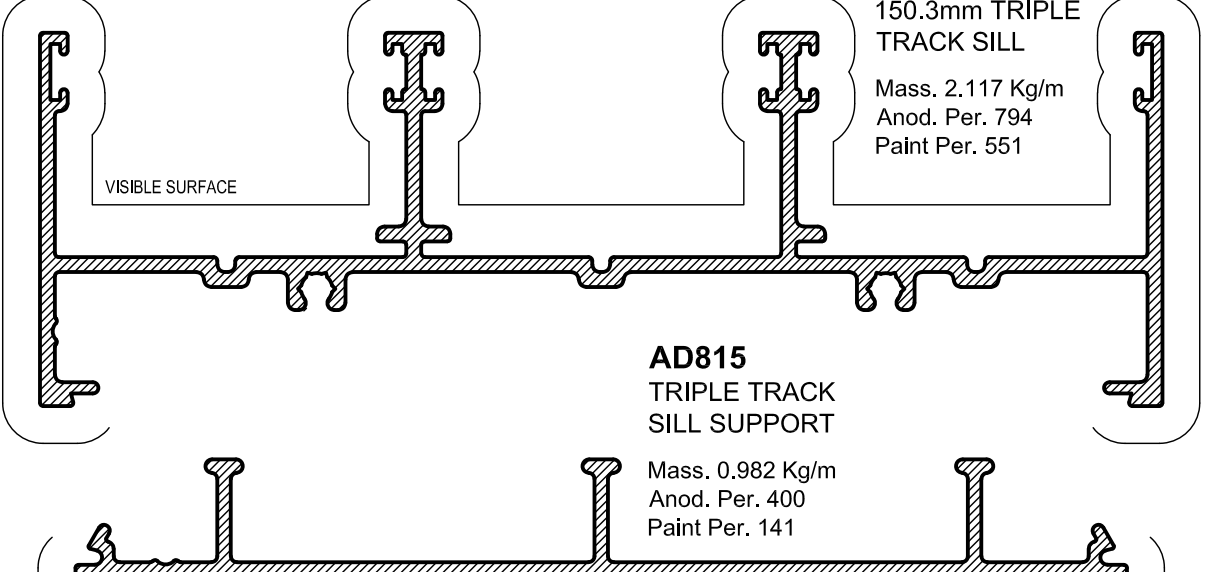


AD831S
150.3mm TRIPLE
TRACK SILL
Mass. 2.117 Kg/m
Anod. Per. 794
Paint Per. 551

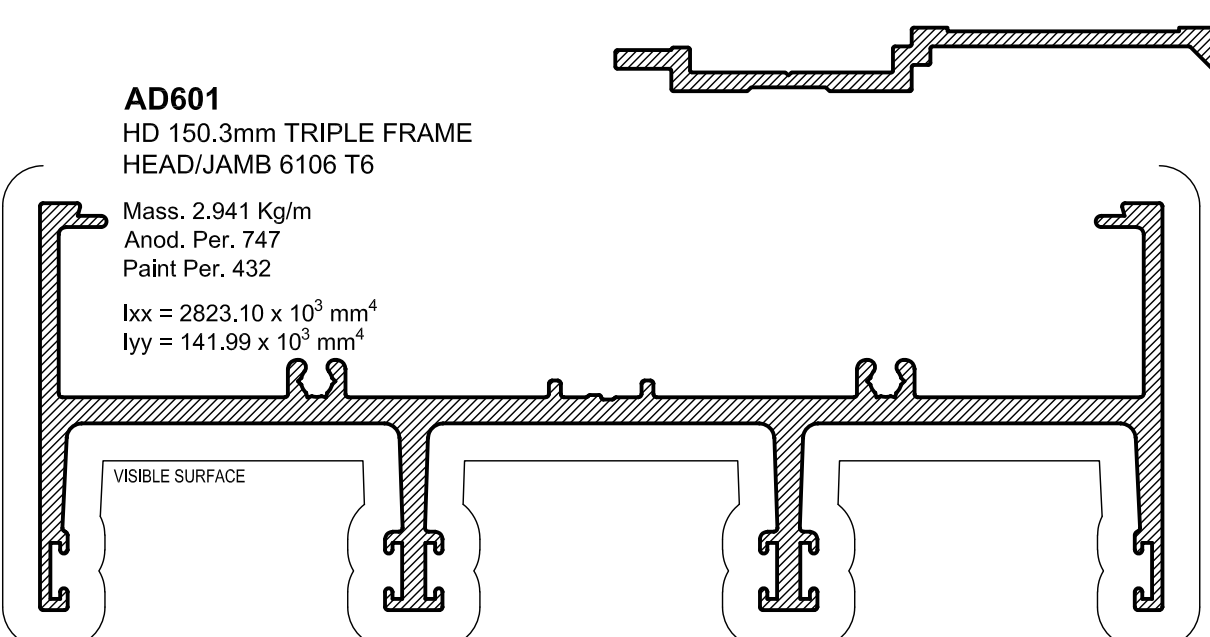


AD601
HD 150.3mm TRIPLE FRAME
HEAD/JAMB 6106 T6
Mass. 2.941 Kg/m
Anod. Per. 747
Paint Per. 432
Ixx = 2823.10 x 10³ mm⁴
Iyy = 141.99 x 10³ mm⁴

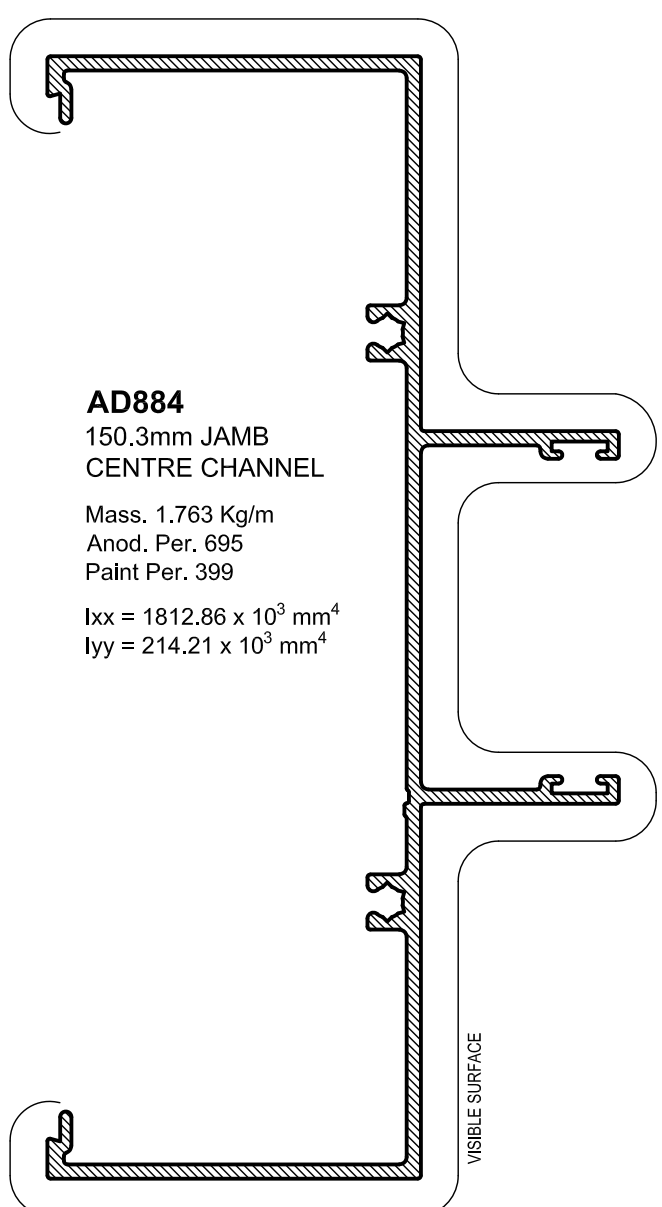


AD884
150.3mm JAMB
CENTRE CHANNEL
Mass. 1.763 Kg/m
Anod. Per. 695
Paint Per. 399
Ixx = 1812.86 x 10³ mm⁴
Iyy = 214.21 x 10³ mm⁴

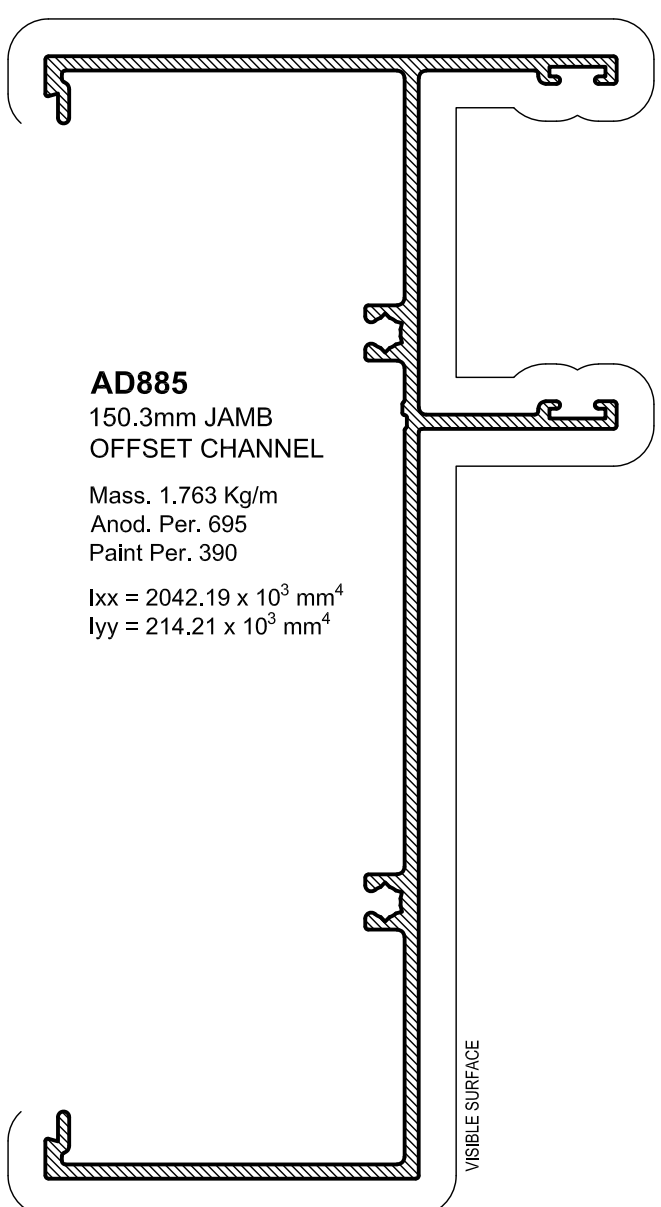


AD885
150.3mm JAMB
OFFSET CHANNEL
Mass. 1.763 Kg/m
Anod. Per. 695
Paint Per. 390
Ixx = 2042.19 x 10³ mm⁴
Iyy = 214.21 x 10³ mm⁴

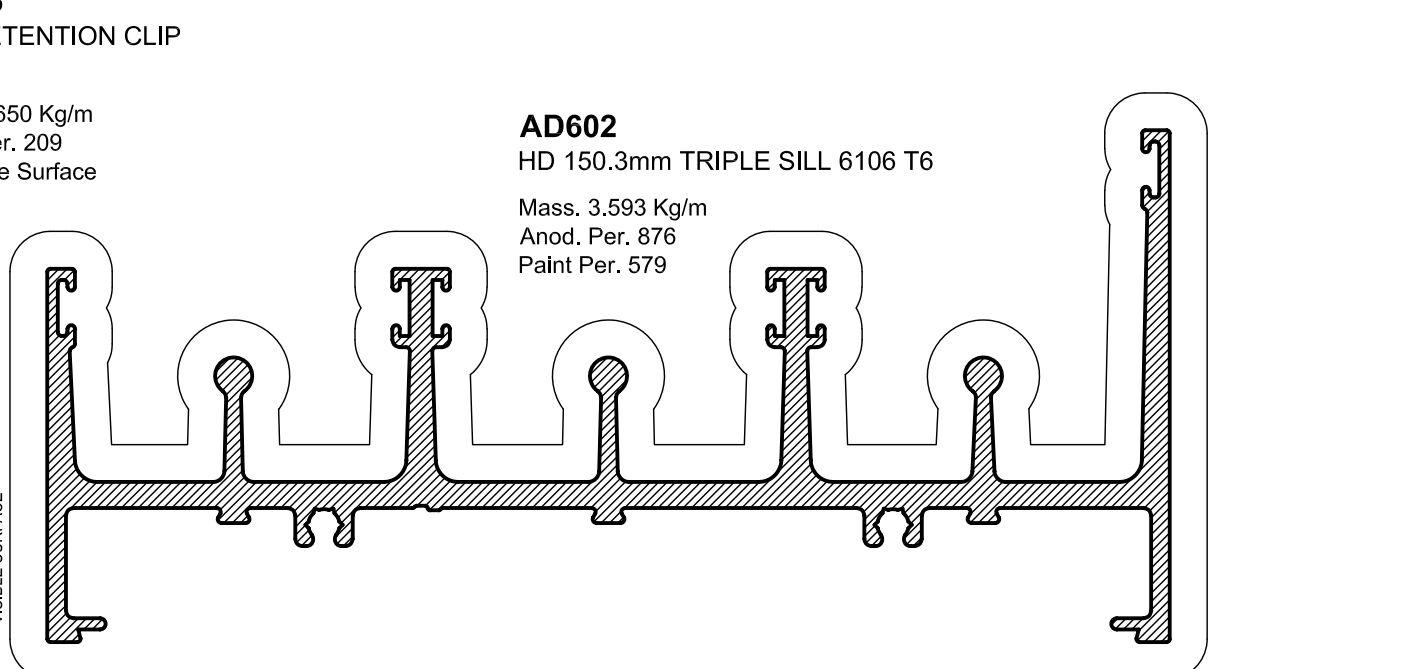


AD602
HD 150.3mm TRIPLE SILL 6106 T6
Mass. 3.593 Kg/m
Anod. Per. 876
Paint Per. 579

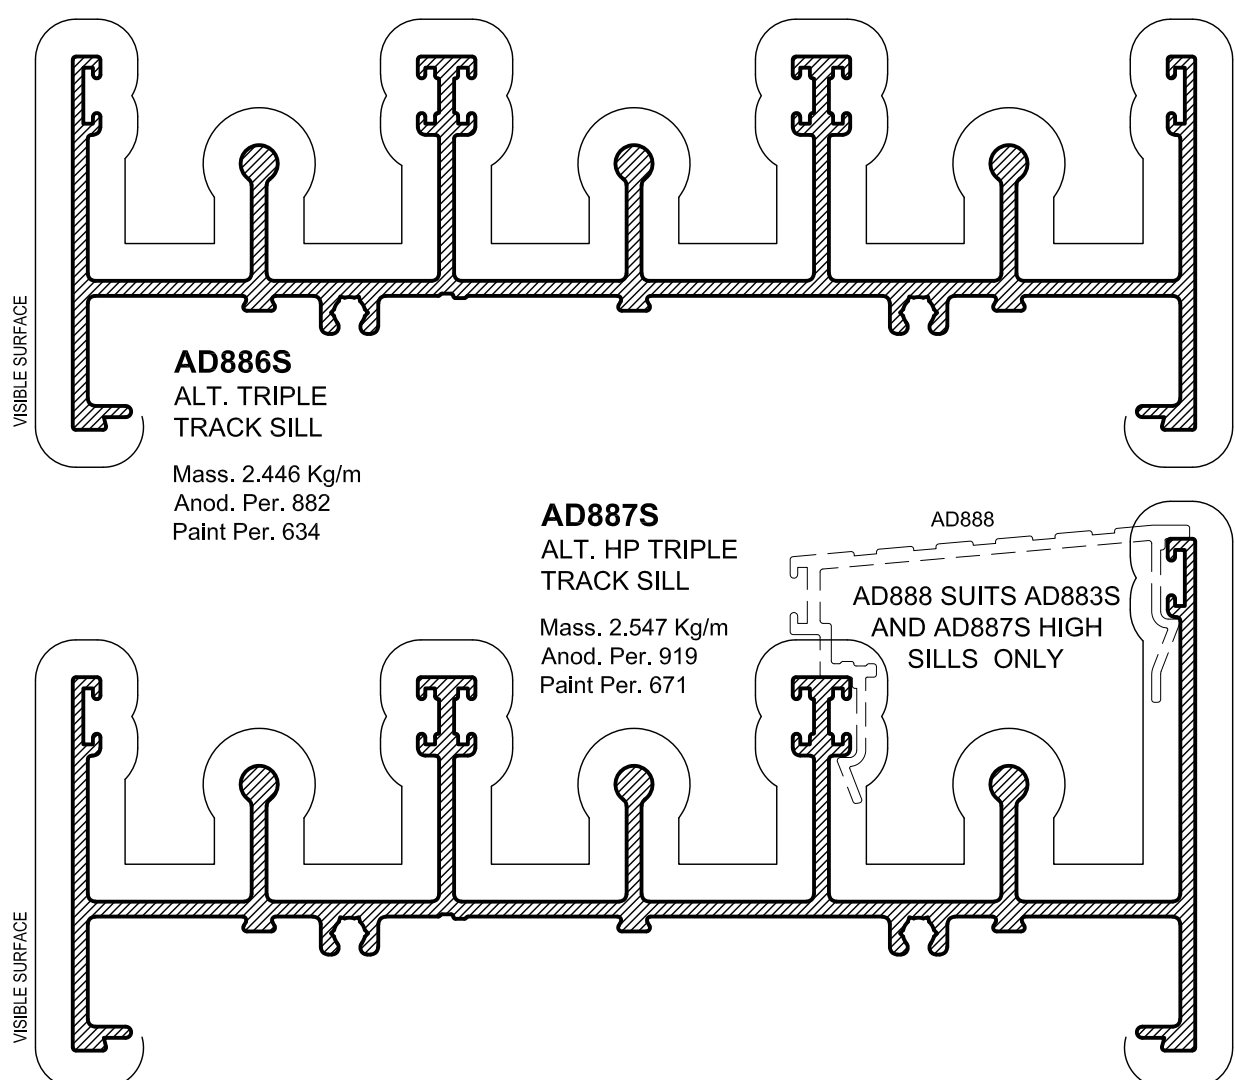


AD886S
ALT. TRIPLE
TRACK SILL
Mass. 2.446 Kg/m
Anod. Per. 882
Paint Per. 634

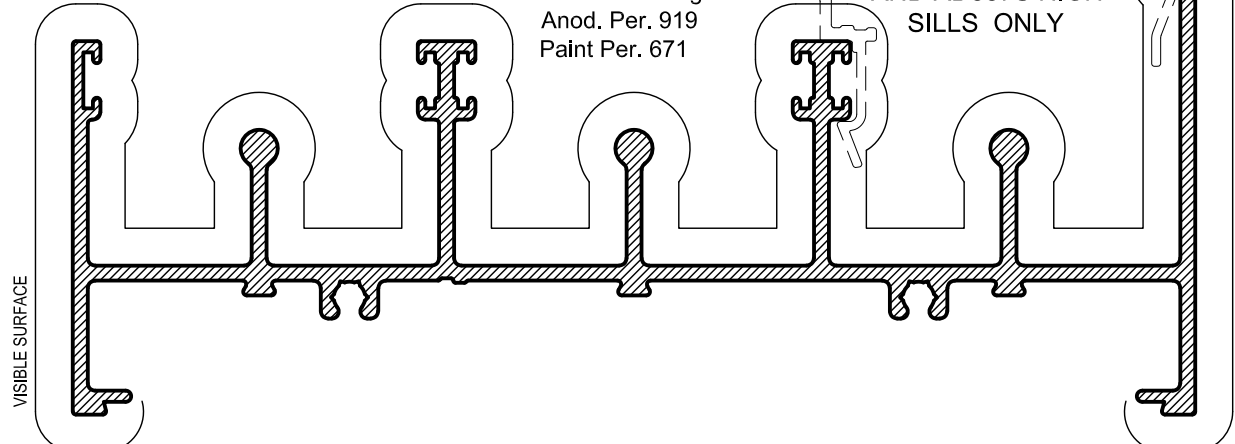


AD887S
ALT. HP TRIPLE
TRACK SILL
Mass. 2.547 Kg/m
Anod. Per. 919
Paint Per. 671

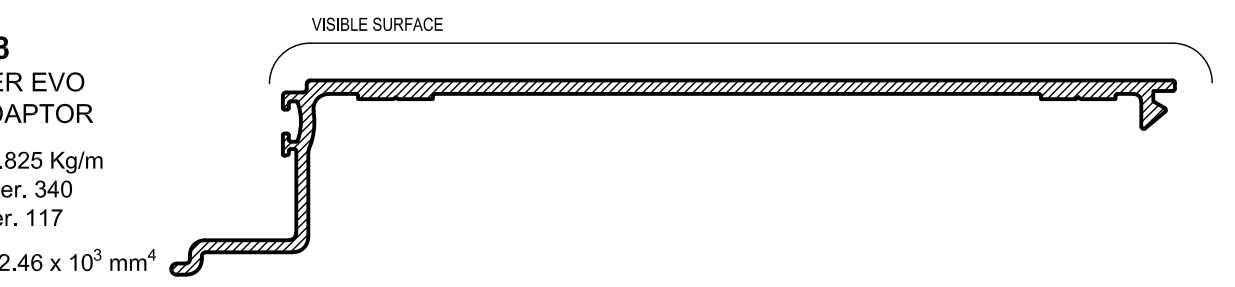

HE378
HUNTER EVO
S.G ADAPTOR
Mass. 0.825 Kg/m
Anod. Per. 340
Paint Per. 117
Ixx = 522.46 x 10³ mm⁴

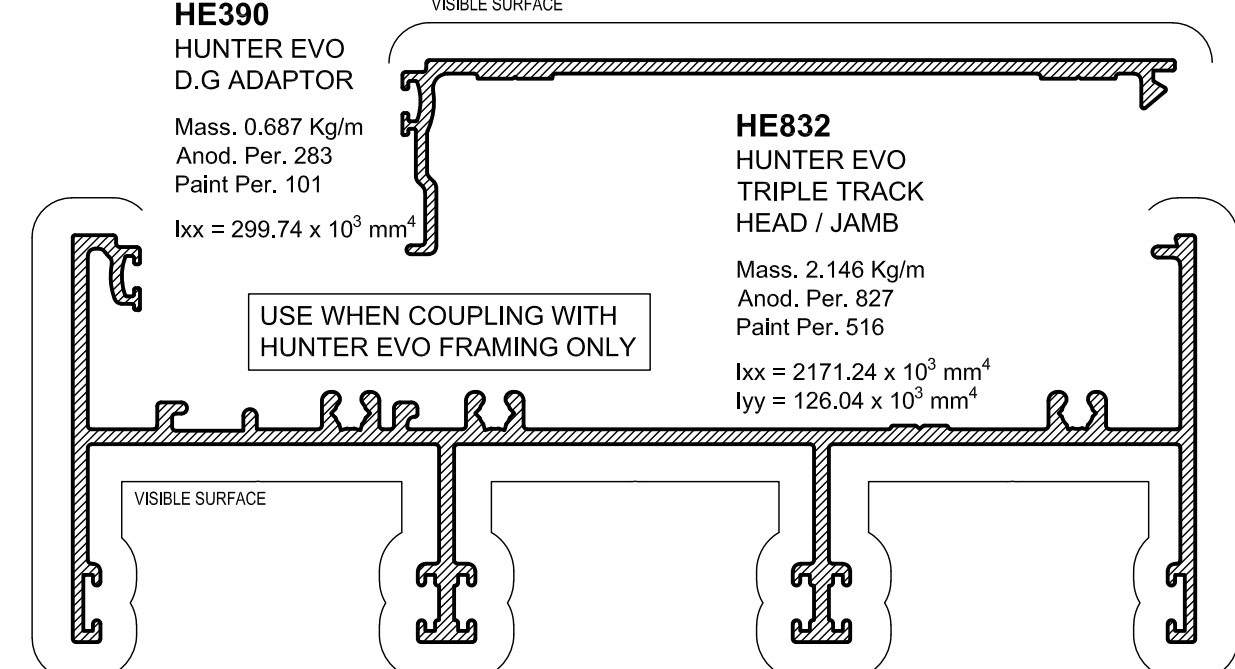

HE390
HUNTER EVO
D.G ADAPTOR
Mass. 0.687 Kg/m
Anod. Per. 283
Paint Per. 101
Ixx = 299.74 x 10³ mm⁴

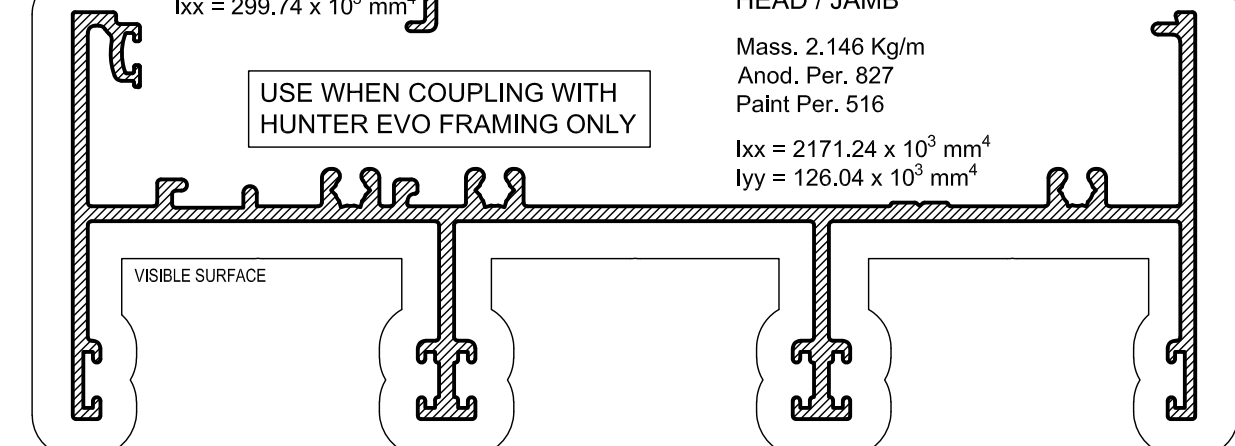

HE832
HUNTER EVO
TRIPLE TRACK
HEAD / JAMB
Mass. 2.146 Kg/m
Anod. Per. 827
Paint Per. 516
Ixx = 2171.24 x 10³ mm⁴
Iyy = 126.04 x 10³ mm⁴

SYDNEY BRANCH
3 Alspec Place
Eastern Creek NSW 2766
Ph: 02 9834 9500
sydney@alspec.com.au

MELBOURNE BRANCH
26-40 Pound Road West
Dandenong South VIC 3175
Phone: 03 8787 6333
melbourne@alspec.com.au

BRISBANE BRANCH
8-22 Juland Street
Logans QLD 4131
Phone: 07 3089 4900
brisbane@alspec.com.au

ADELAIDE BRANCH
1 Pope Court
Beverly SA 5099
Phone: 08 8941 7300
adelaide@alspec.com.au

DARWIN BRANCH
25 Bishop Street
Woolmer NT 0820
Phone: 08 8941 7300
darwin@alspec.com.au

CANBERRA BRANCH
28 Sheppard Street
Hume ACT 2620
Phone: 02 5134 3300
canberra@alspec.com.au

PERTH BRANCH
30 Holder Way
Midland WA 6150
Phone: 08 9209 9100
perth@alspec.com.au

NEWCASTLE BRANCH
95 Griffiths Road
Lambton NSW 2229
Phone: 02 4952 9111
newcastle@alspec.com.au

BRENDALE BRANCH
24 Doherty Street
Bendale QLD 4600
Phone: 07 3205 9911
brendale@alspec.com.au

SUNSHINE COAST BRANCH
4-8 Empire Crescent
Chevalerie QLD 4555
Phone: 07 5437 6123
sunshinecoast@alspec.com.au

TOWNSVILLE BRANCH
21 Carroll Street
Mount Louis QLD 4814
Phone: 07 3089 4965
townsville@alspec.com.au

CAIRNS BRANCH
34-38 Hargreaves Street
Edmonton QLD 4869
Phone: 07 4037 6666
cairns@alspec.com.au


BUNDEBERG BRANCH
17 Production Street
Swenson Heights QLD 4670
Phone: 07 4111 2000
bundeburg@alspec.com.au

CARRUM DOWNS BRANCH
99 Frankston Gardens Drive
Carrum Downs VIC 3201
Phone: 03 9775 1223
carrumdwns@alspec.com.au


1300 ALSPEC (257732)

alspec.com.au


151.5mm TRIPLE TRACK FRAMING

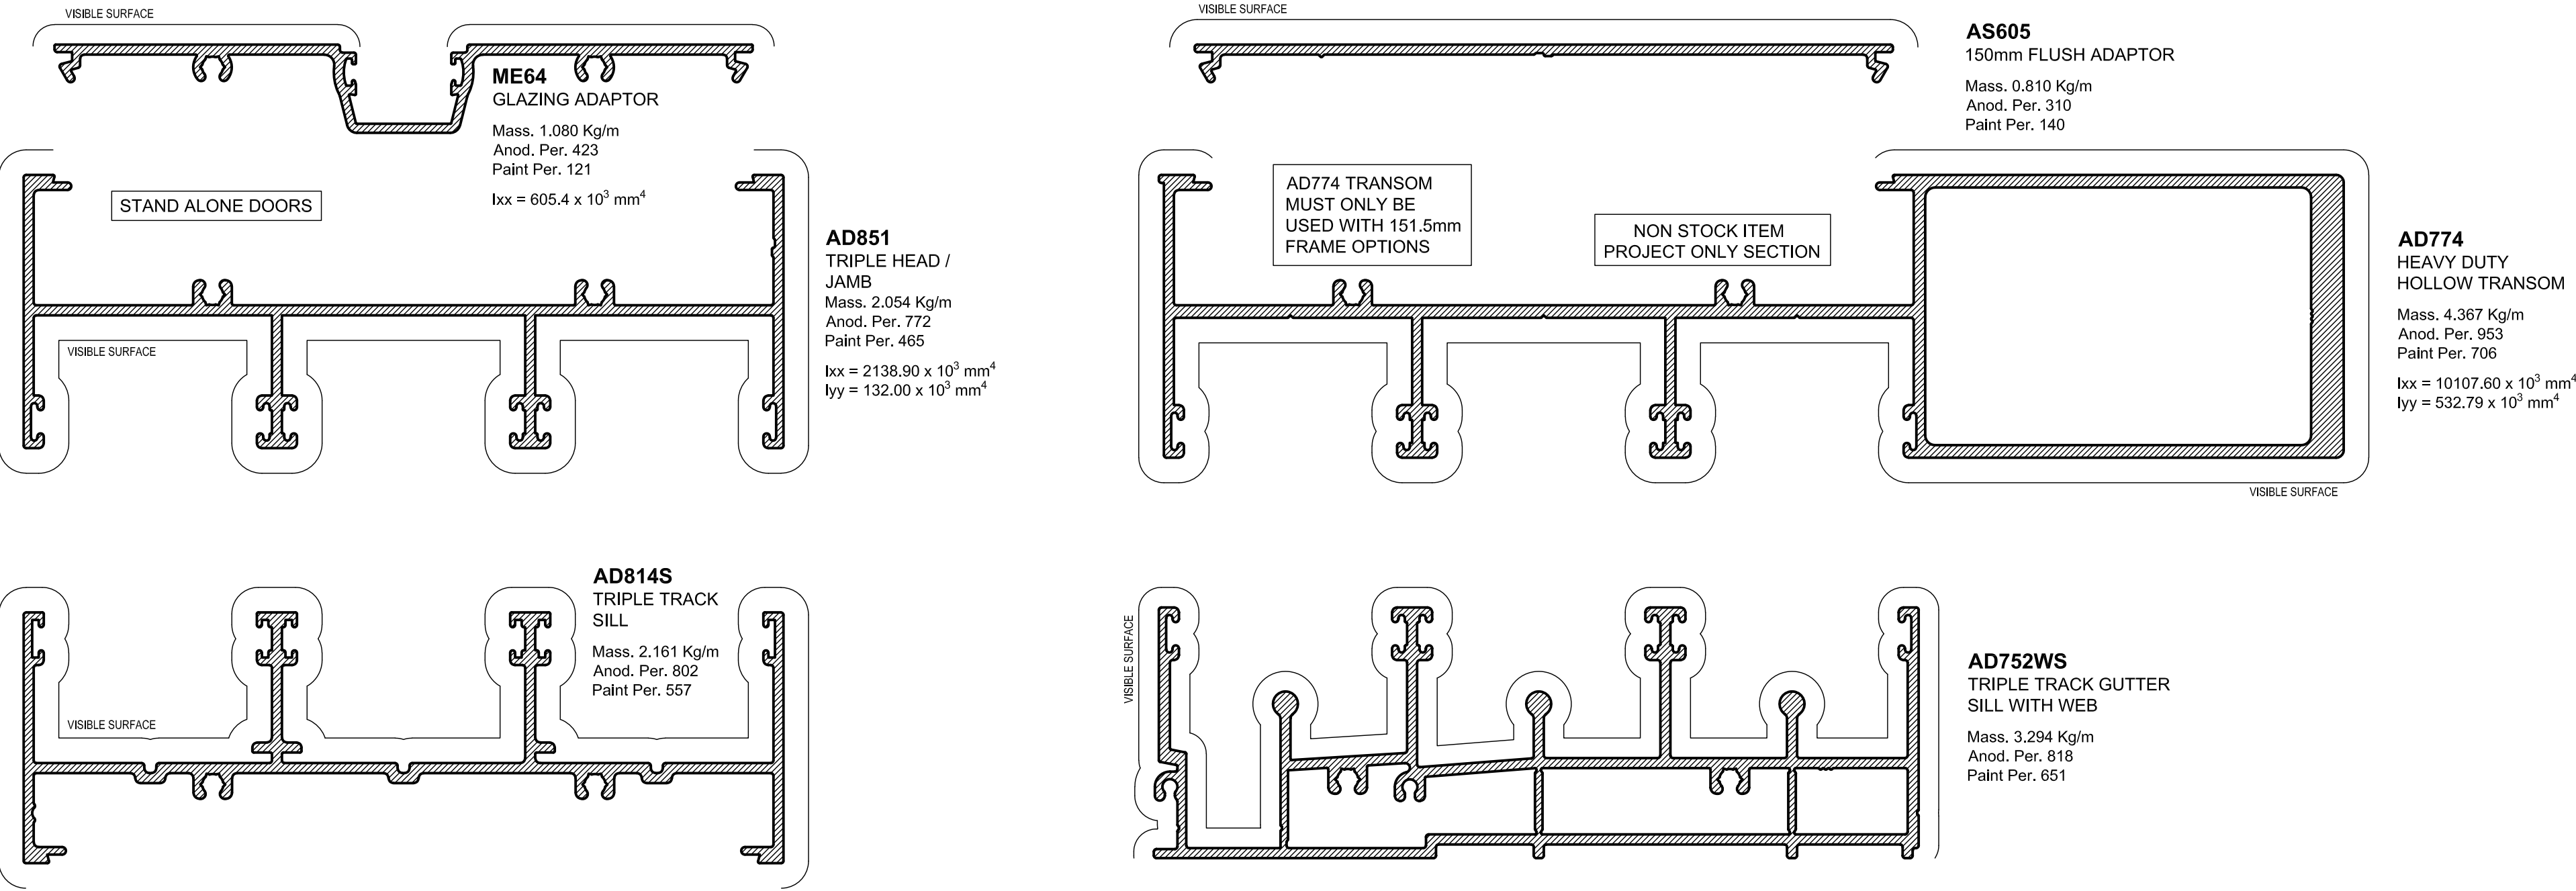


FOUR TRACK FRAMING

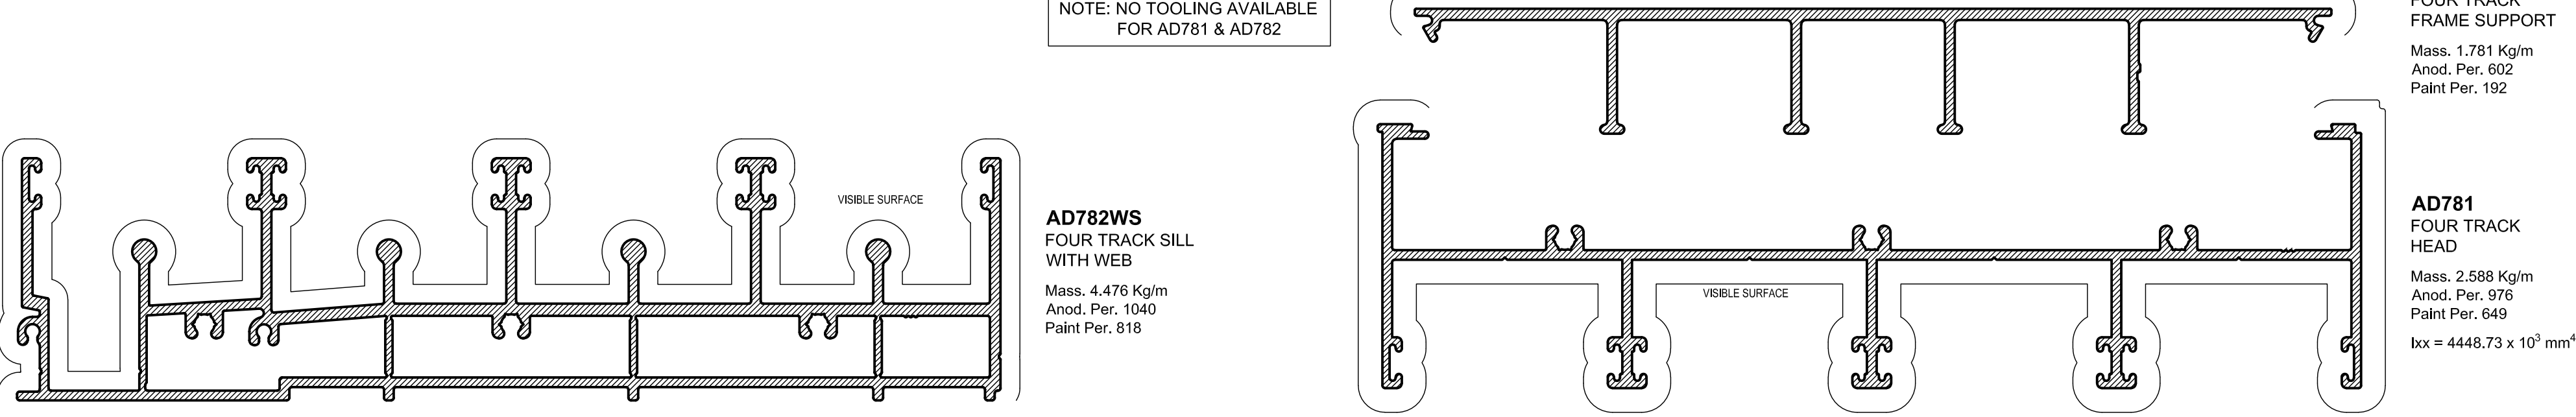


UltraFlat[®]

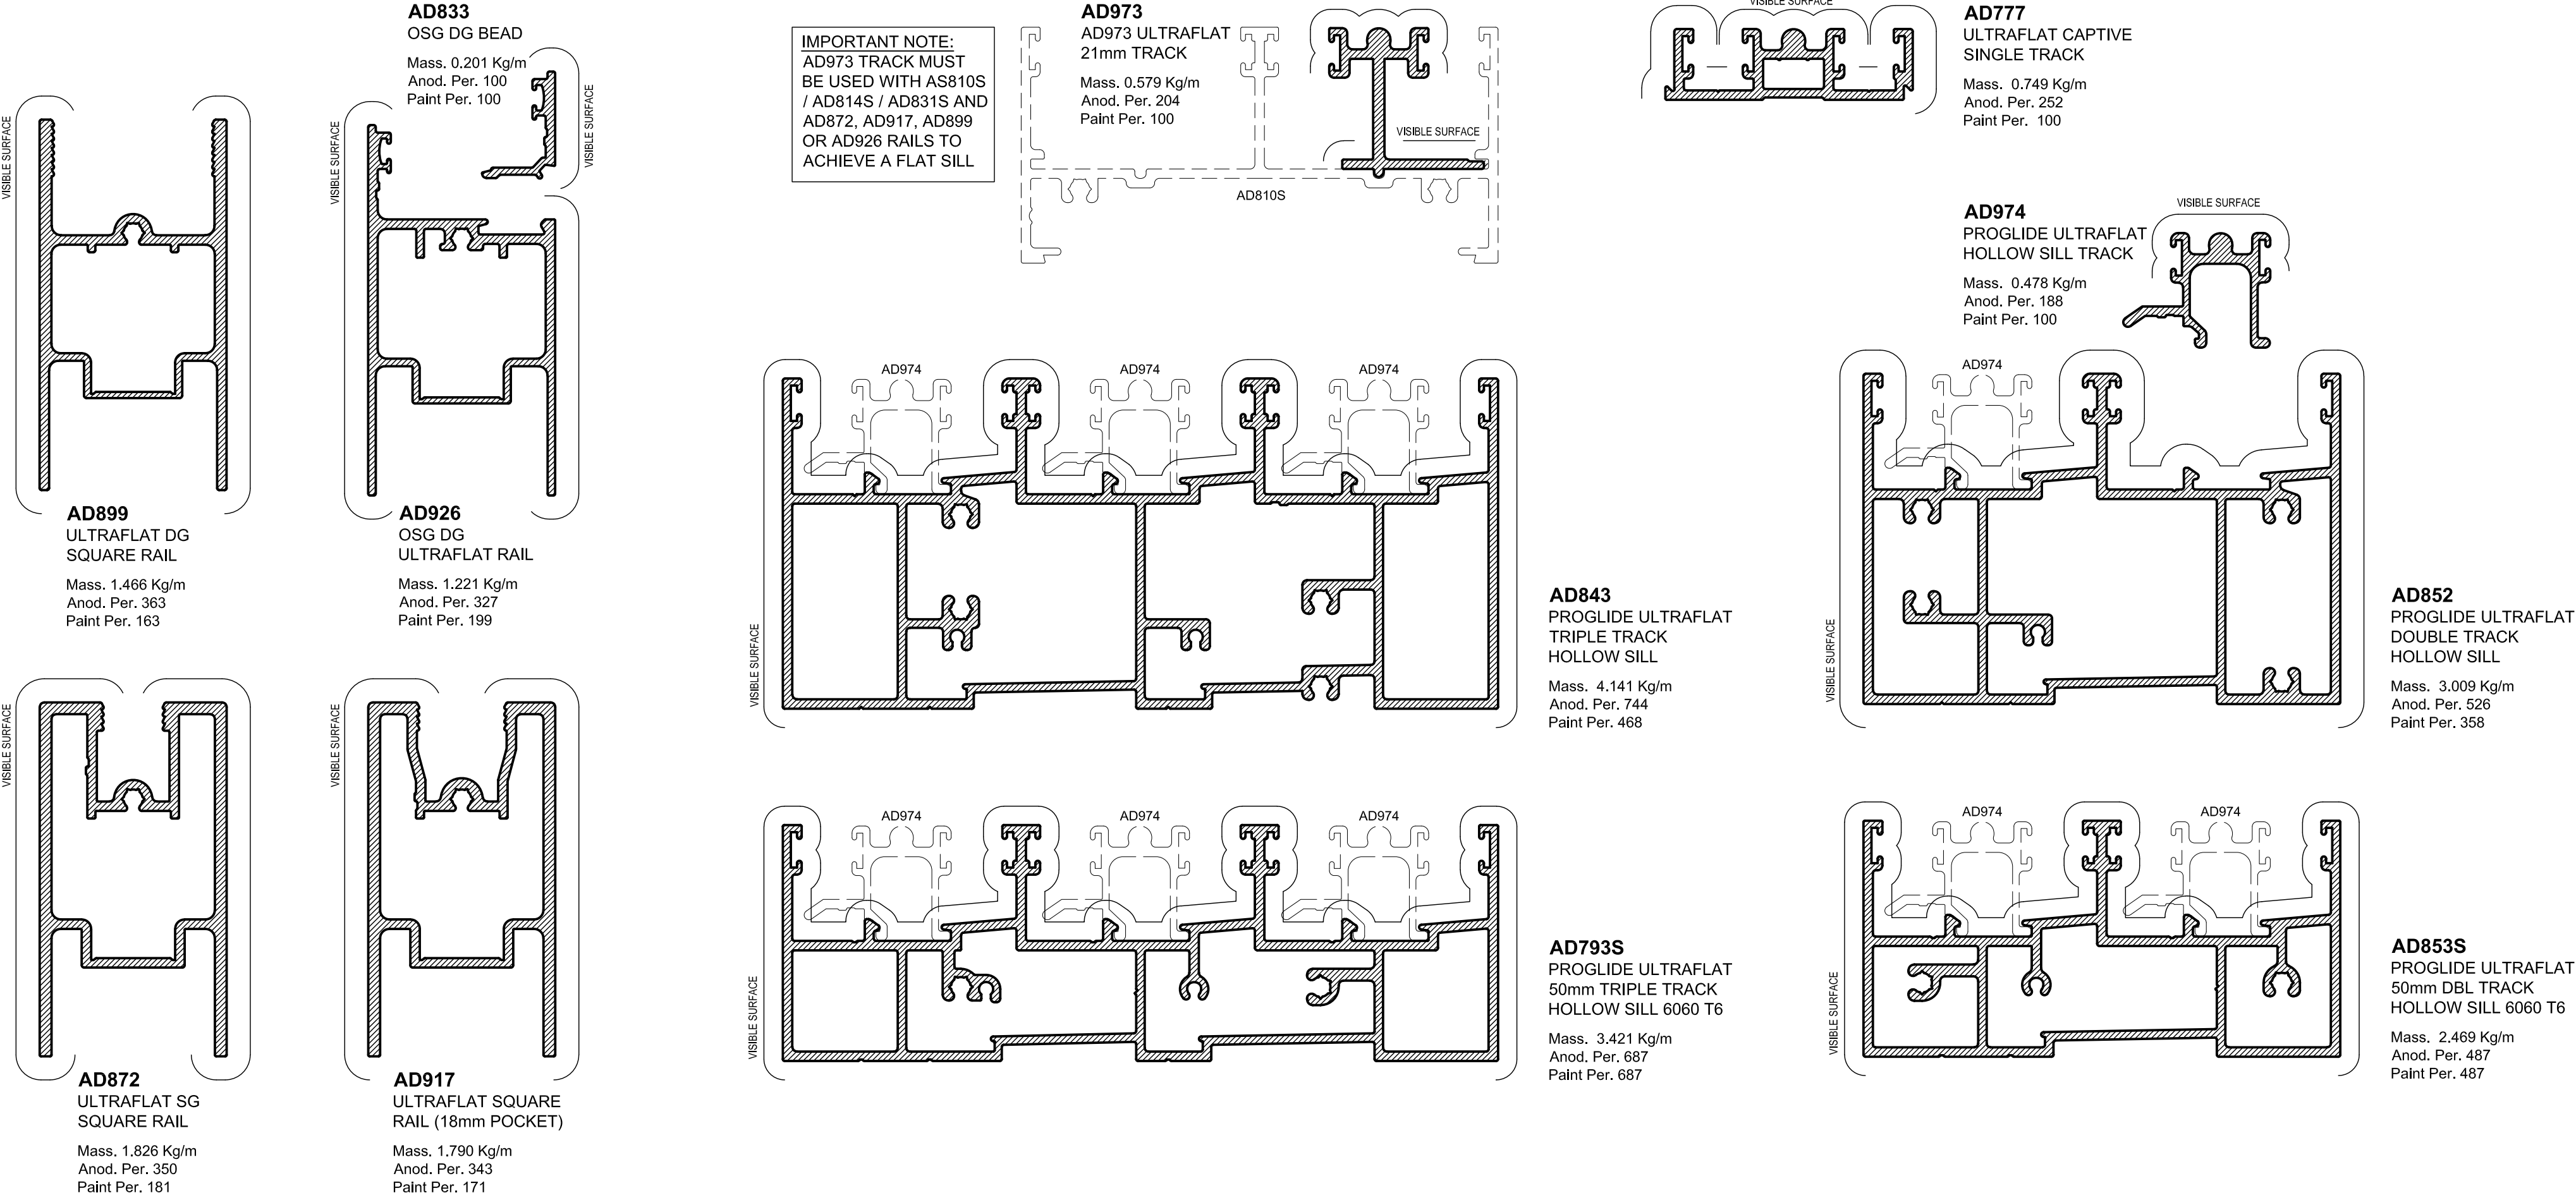


12mm POCKET

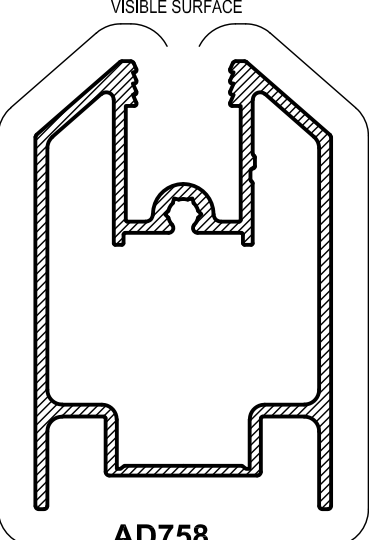


AD758
BEVELLED RAIL
Mass. 1,121 Kg/m
Anod. Per. 121
Paint Per. 139

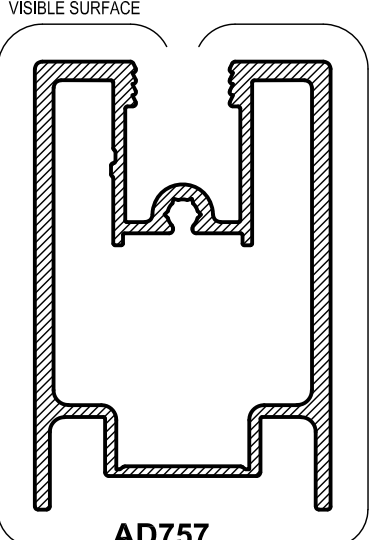


AD757
SQUARE RAIL
Mass. 1,455 Kg/m
Anod. Per. 292
Paint Per. 218

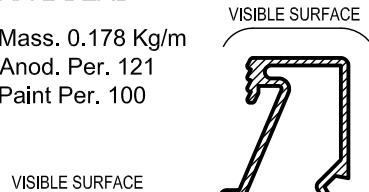


AD768
SQUARE RAIL BEAD
Mass. 0,178 Kg/m
Anod. Per. 121
Paint Per. 100

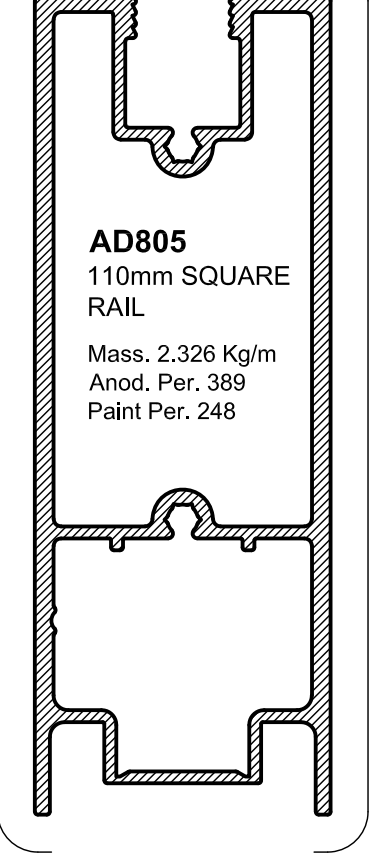


AD805
110mm SQUARE RAIL
Mass. 2,326 Kg/m
Anod. Per. 389
Paint Per. 248

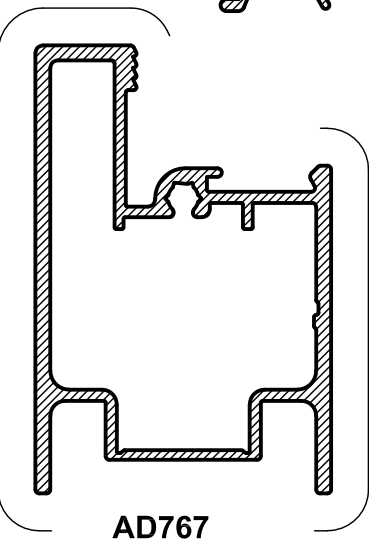


AD767
SQUARE BEADED RAIL
Mass. 1,103 Kg/m
Anod. Per. 258
Paint Per. 122

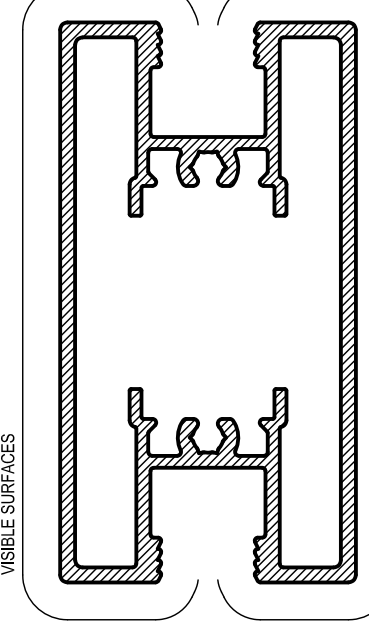


AD869
MIDRAIL
Mass. 1,855 Kg/m
Anod. Per. 302
Paint Per. 208

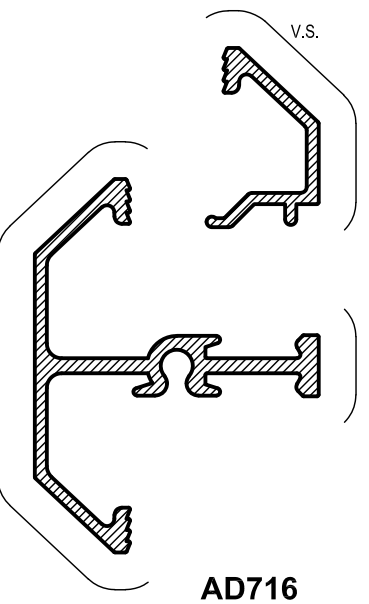


AD716
PROGLIDE DOOR MIDRAIL
Mass. 0,636 Kg/m
Anod. Per. 251
Paint Per. 100

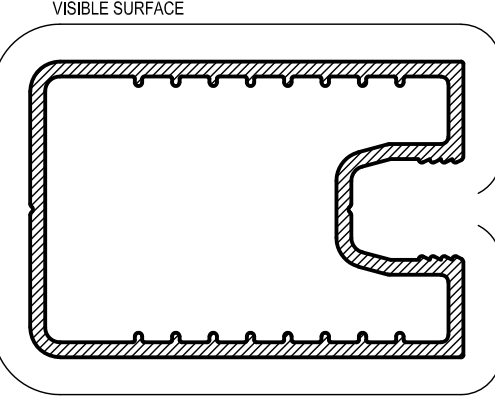


AD745
STD LOCK STILE
Mass. 1,199 Kg/m
Anod. Per. 222
Paint Per. 181
lxx = 104,24 x 10³ mm⁴

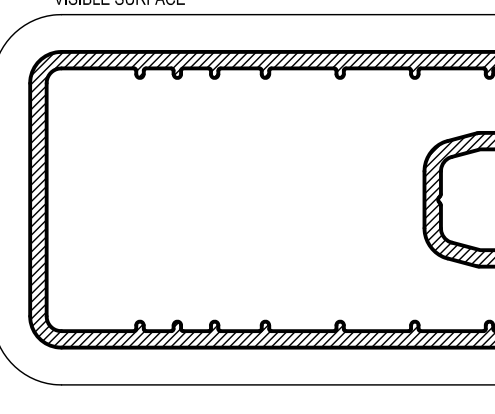


AD795
70mm LOCK STILE
Mass. 1,450 Kg/m
Anod. Per. 246
Paint Per. 202
lxx = 130,20 x 10³ mm⁴

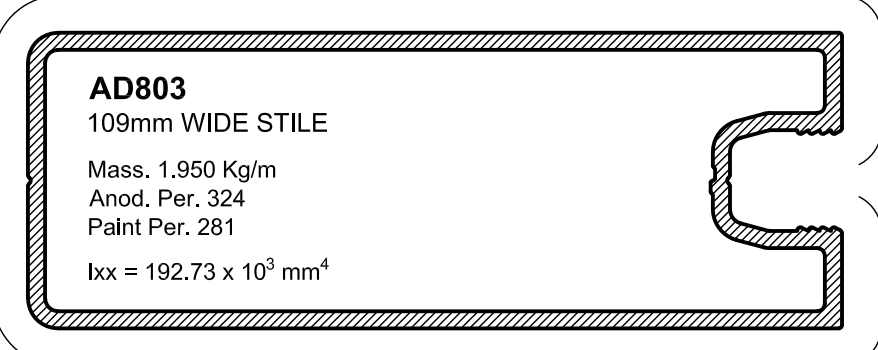


AD803
109mm WIDE STILE
Mass. 1,950 Kg/m
Anod. Per. 324
Paint Per. 281
lxx = 192,73 x 10³ mm⁴

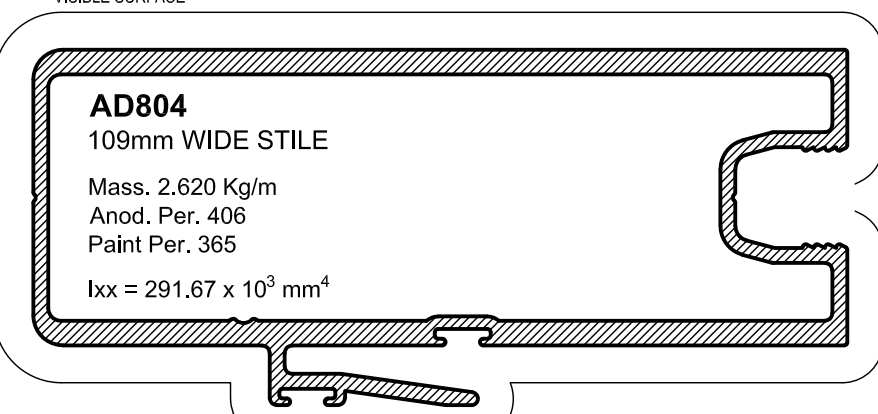


AD804
109mm WIDE STILE
Mass. 2,620 Kg/m
Anod. Per. 406
Paint Per. 365
lxx = 291,67 x 10³ mm⁴

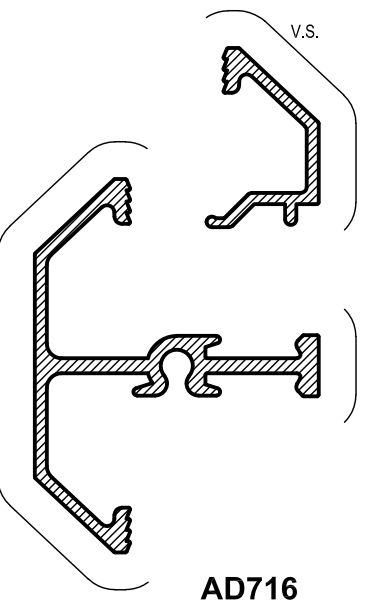


AD717
PROGLIDE DOOR BEAD
Mass. 0,207 Kg/m
Anod. Per. 100
Paint Per. 100

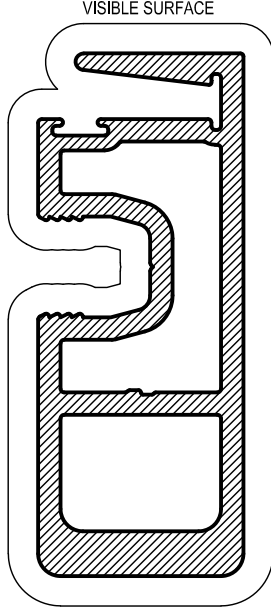


AD988
12mm POCKET 70mm SLIM INTERLOCK HEAVY DUTY
Mass. 2,131 Kg/m
Anod. Per. 272
Paint Per. 220

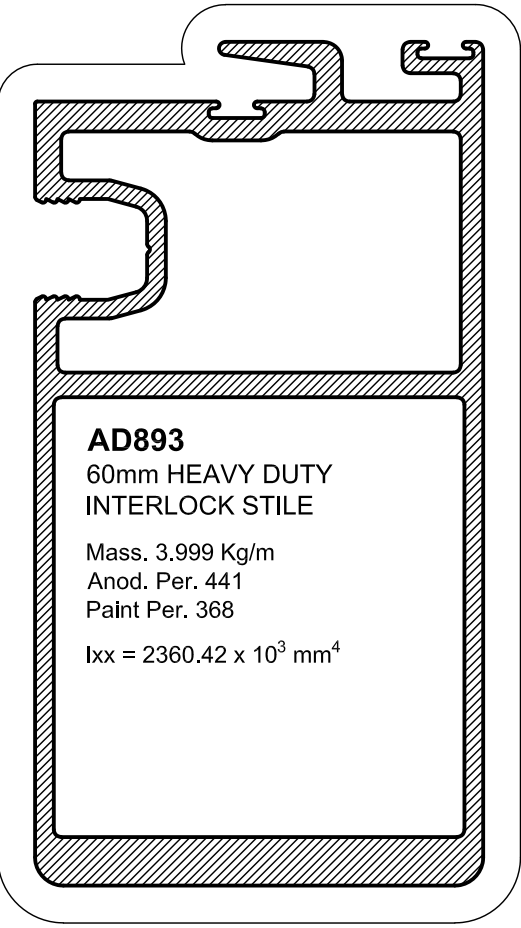


AD893
60mm HEAVY DUTY INTERLOCK STILE
Mass. 3,999 Kg/m
Anod. Per. 441
Paint Per. 368
lxx = 2360,42 x 10³ mm⁴

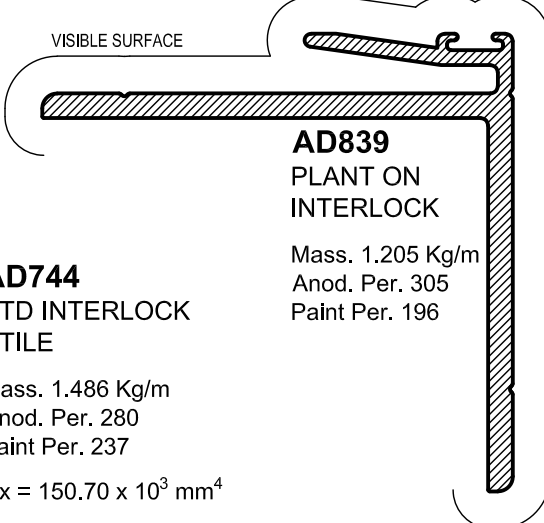


AD839
PLANT ON INTERLOCK
Mass. 1,205 Kg/m
Anod. Per. 305
Paint Per. 196

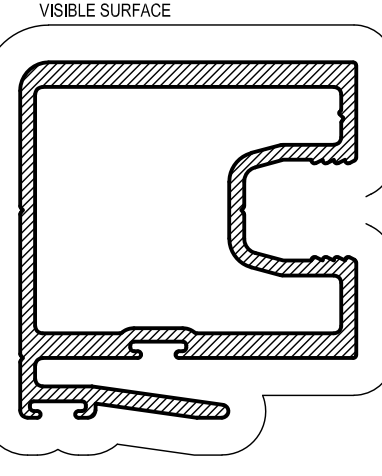


AD744
STD INTERLOCK STILE
Mass. 1,486 Kg/m
Anod. Per. 280
Paint Per. 237
lxx = 150,70 x 10³ mm⁴

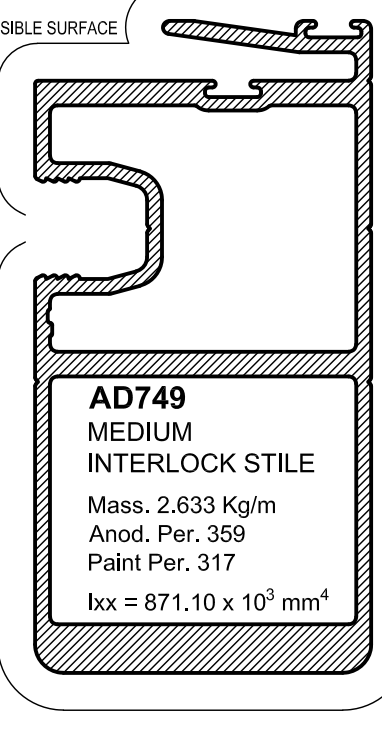


AD749
MEDIUM INTERLOCK STILE
Mass. 2,633 Kg/m
Anod. Per. 359
Paint Per. 317
lxx = 871,10 x 10³ mm⁴

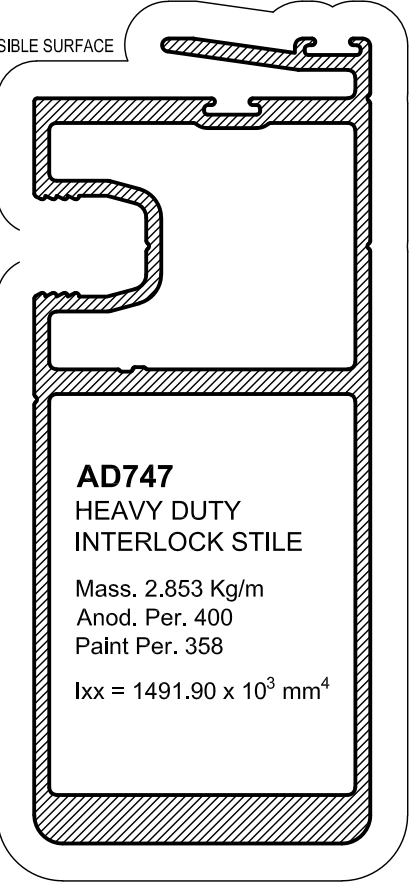


AD747
HEAVY DUTY INTERLOCK STILE
Mass. 2,853 Kg/m
Anod. Per. 400
Paint Per. 358
lxx = 1491,90 x 10³ mm⁴

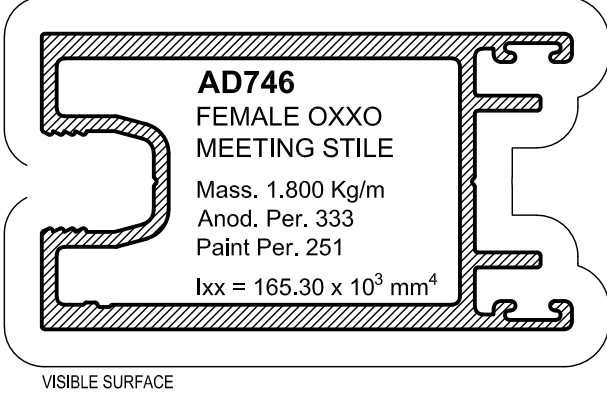


AD746
FEMALE OXCO MEETING STILE
Mass. 1,800 Kg/m
Anod. Per. 333
Paint Per. 251
lxx = 165,30 x 10³ mm⁴

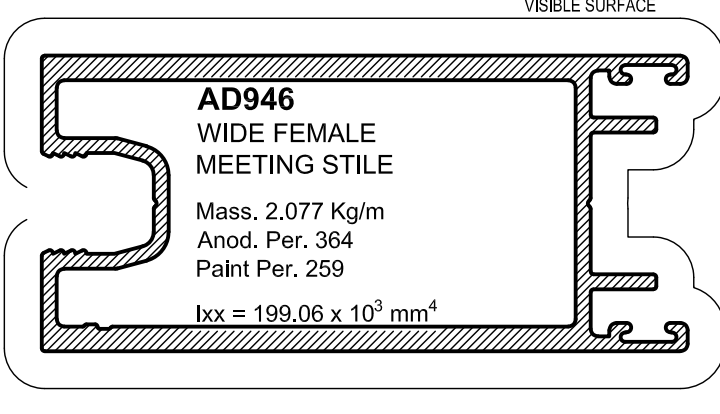


AD946
WIDE FEMALE MEETING STILE
Mass. 2,077 Kg/m
Anod. Per. 364
Paint Per. 259
lxx = 199,06 x 10³ mm⁴

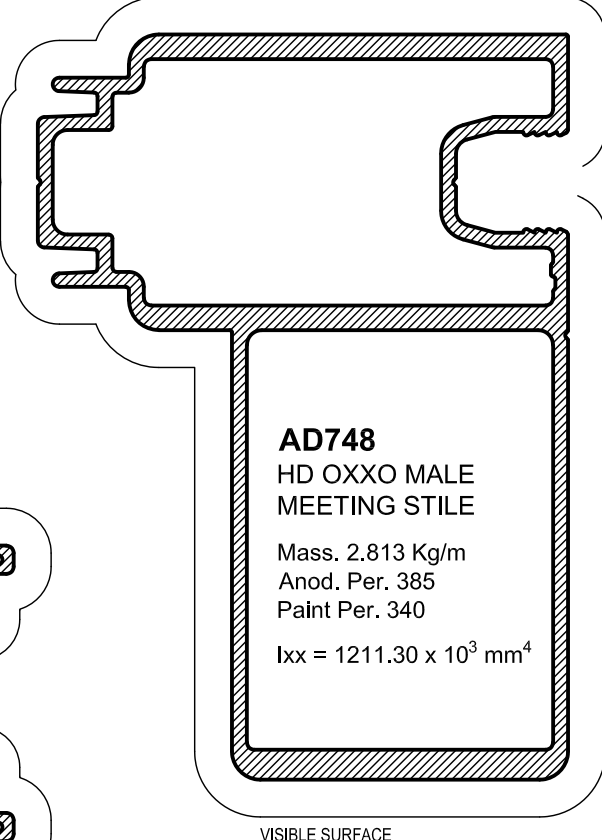


AD755
MALE OXCO MEETING STILE
Mass. 1,728 Kg/m
Anod. Per. 258
Paint Per. 224
lxx = 149,35 x 10³ mm⁴

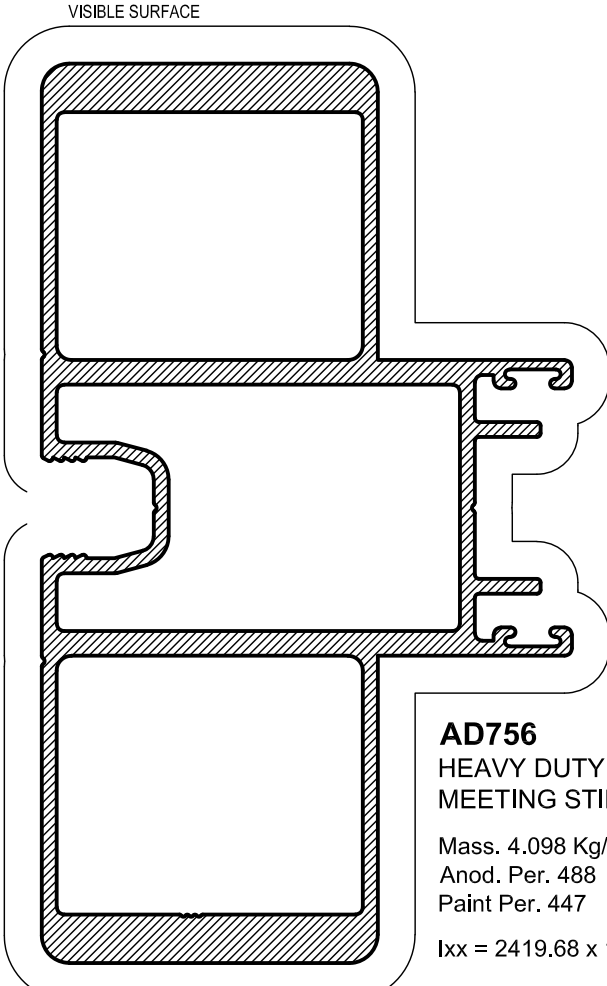


AD756
HEAVY DUTY FEMALE MEETING STILE
Mass. 4,098 Kg/m
Anod. Per. 488
Paint Per. 447
lxx = 2419,68 x 10³ mm⁴

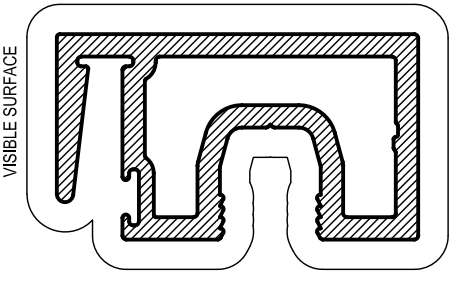

AD980
12mm POCKET SLIM INTERLOCK
Mass. 1,437 Kg/m
Anod. Per. 231
Paint Per. 231
lxx = 42,52 x 10³ mm⁴

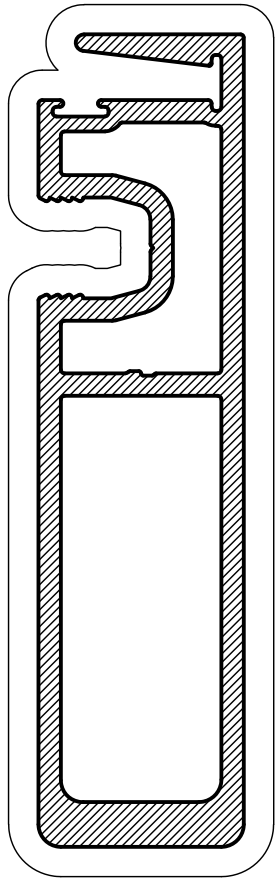


AD983
12mm POCKET SLIM INTERLOCK HEAVY DUTY
Mass. 2,761 Kg/m
Anod. Per. 349
Paint Per. 298
lxx = 102,19 x 10³ mm⁴

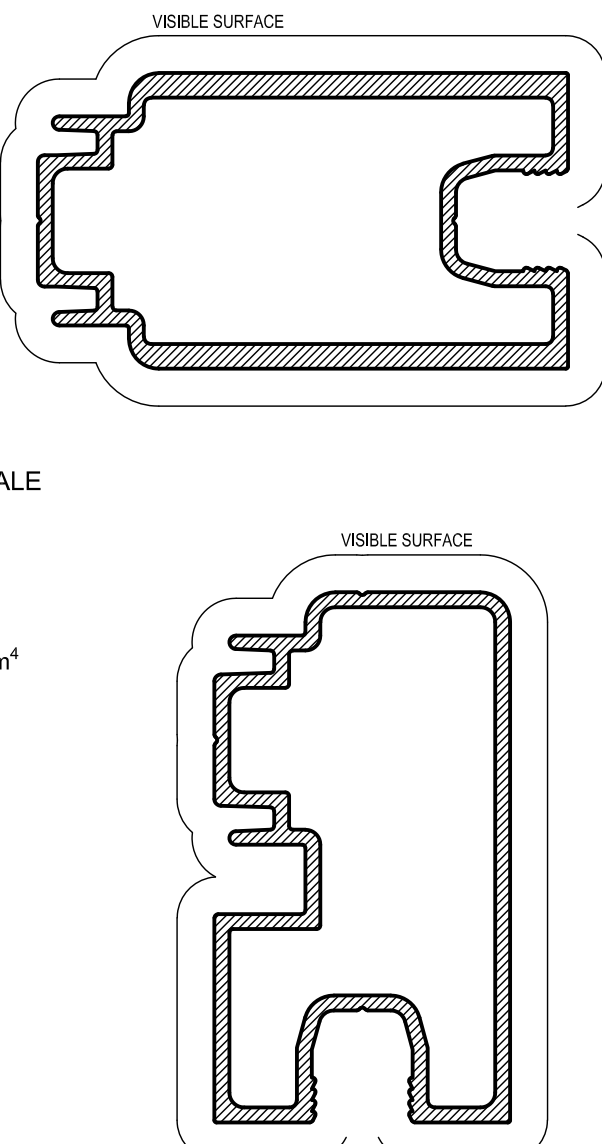


AD771
90° CORNER MEETING STILE
Mass. 1,482 Kg/m
Anod. Per. 292
Paint Per. 251
lxx = 115,48 x 10³ mm⁴


ON SITE GLAZED SG - 12mm POCKET

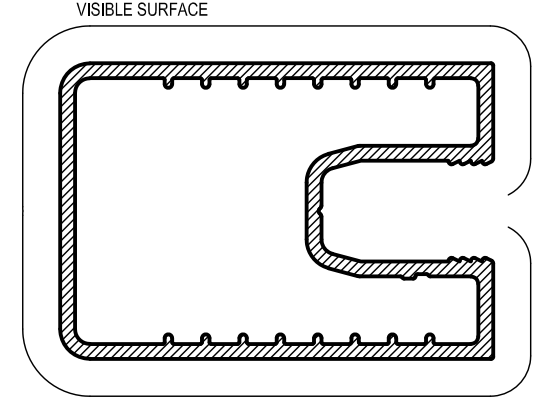


AD845
OSG SG PLAIN LOCK STILE
Mass. 1,290 Kg/m
Anod. Per. 212
lxx = 106,10 x 10³ mm⁴

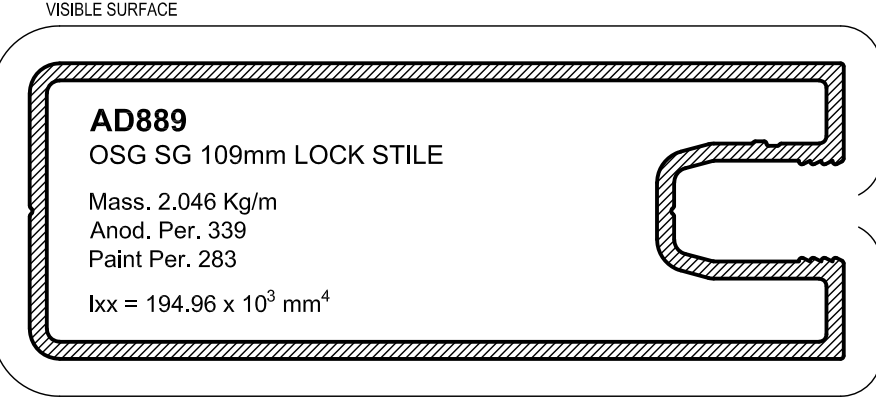


AD889
OSG SG 109mm LOCK STILE
Mass. 2,046 Kg/m
Anod. Per. 339
Paint Per. 283
lxx = 194,96 x 10³ mm⁴

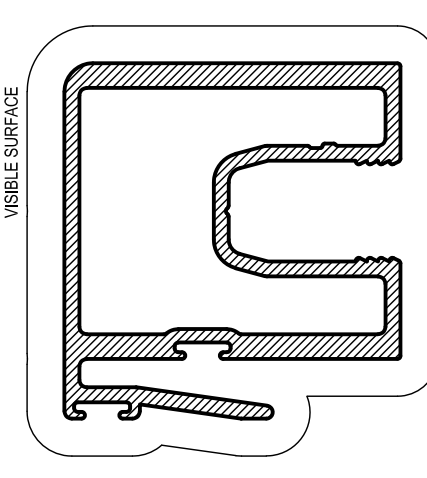


AD844
OSG SG STD INTL STILE
Mass. 1,574 Kg/m
Anod. Per. 296
Paint Per. 195
lxx = 152,90 x 10³ mm⁴

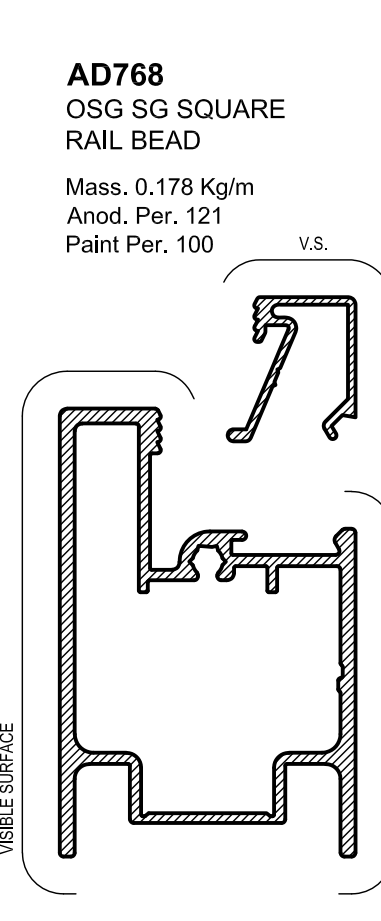


AD768
OSG SG SQUARE RAIL BEAD
Mass. 0,178 Kg/m
Anod. Per. 121
Paint Per. 100

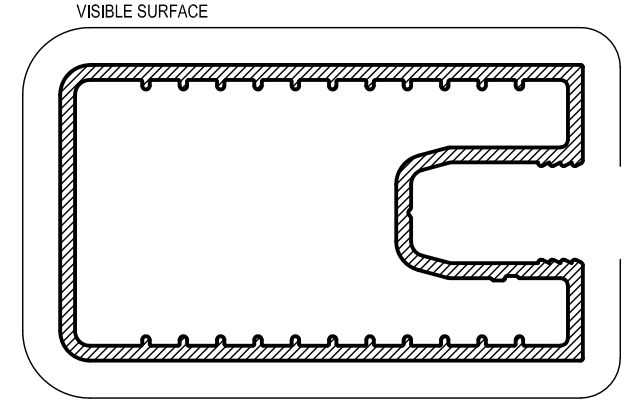


AD895
OSG SG WIDE LOCK STILE
Mass. 1,440 Kg/m
Anod. Per. 238
Paint Per. 228
lxx = 125,20 x 10³ mm⁴

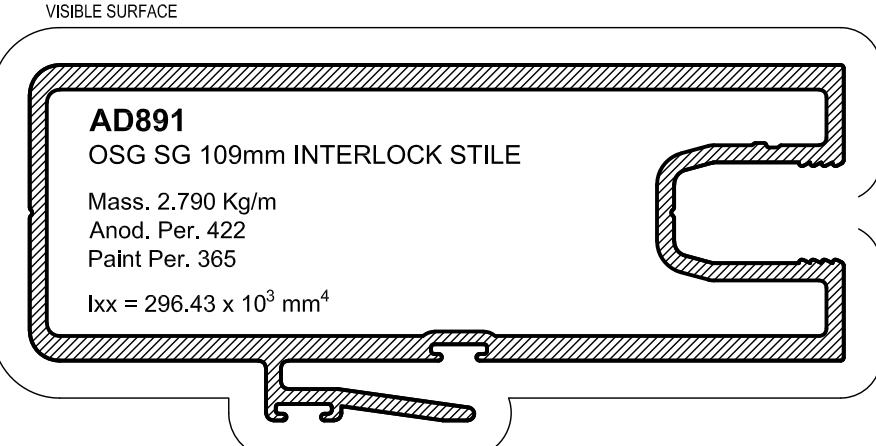


AD891
OSG SG 109mm INTERLOCK STILE
Mass. 2,790 Kg/m
Anod. Per. 422
Paint Per. 365
lxx = 296,43 x 10³ mm⁴

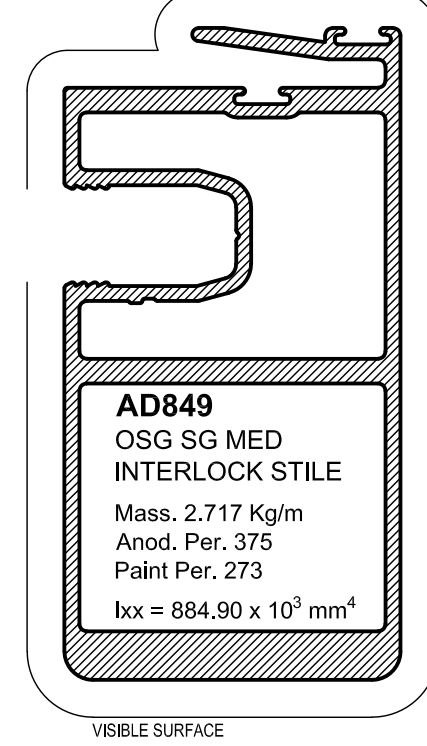


AD849
OSG SG MED INTERLOCK STILE
Mass. 2,717 Kg/m
Anod. Per. 375
Paint Per. 273
lxx = 884,90 x 10³ mm⁴

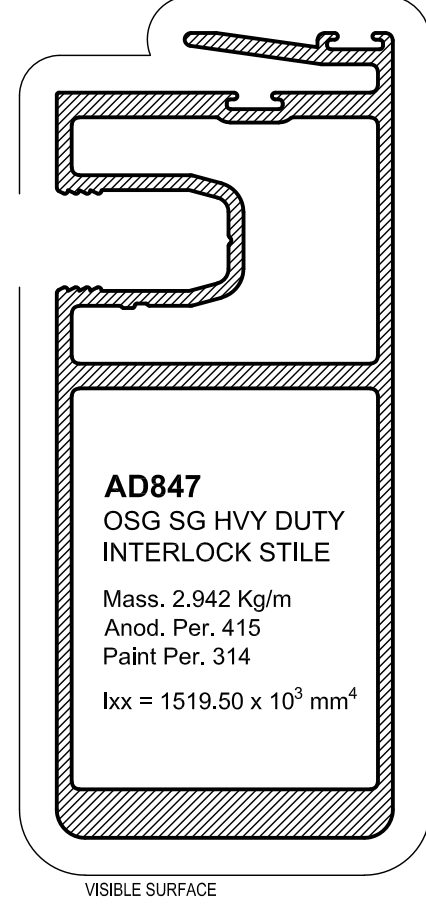

AD847
OSG SG HVY DUTY INTERLOCK STILE
Mass. 2,942 Kg/m
Anod. Per. 415
Paint Per. 314
lxx = 1519,50 x 10³ mm⁴

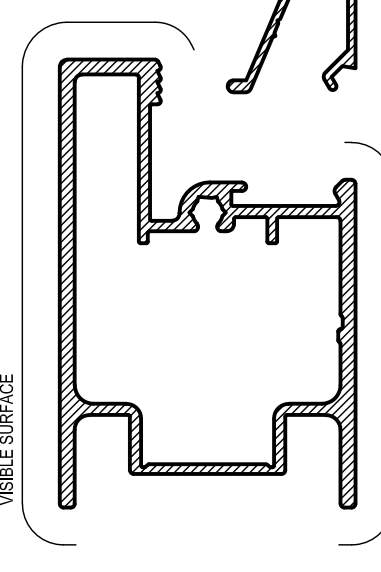

AD767
OSG SG SQUARE RAIL
Mass. 1,103 Kg/m
Anod. Per. 258
Paint Per. 122

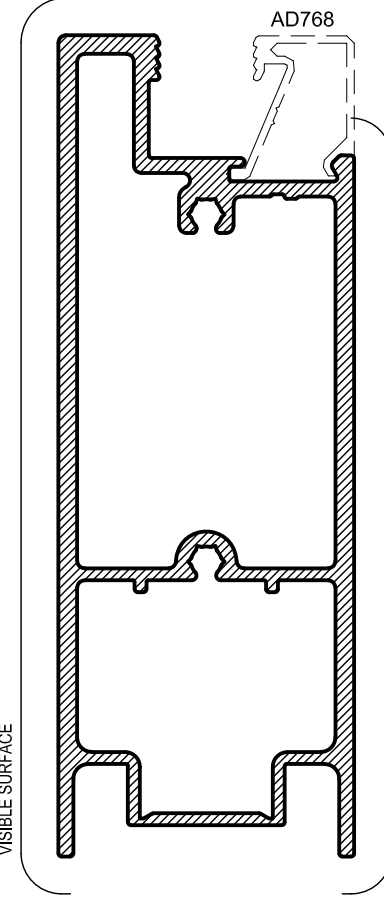


AD890
OSG SG 110mm RAIL
Mass. 2,202 Kg/m
Anod. Per. 351
Paint Per. 219


ProGlide

HIGH PERFORMANCE SLIDING DOOR


18mm POCKET

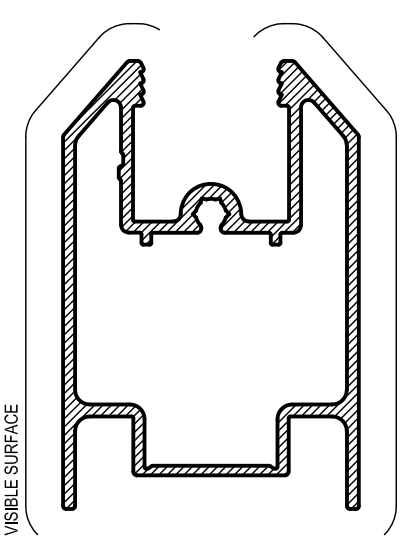


AD826
RAIL (18mm POCKET)
Mass. 1.124 Kg/m
Anod. Per. 281
Paint Per. 130

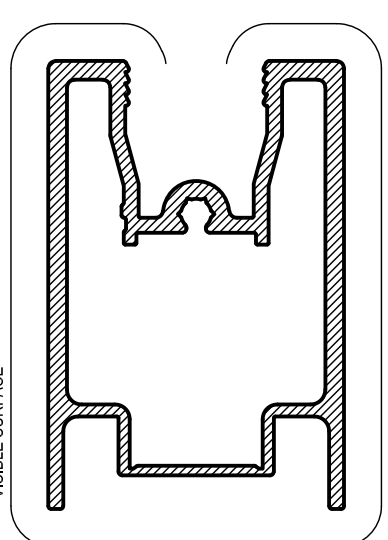


AD867
SQUARE RAIL
(18mm POCKET)
Mass. 1.477 Kg/m
Anod. Per. 283
Paint Per. 146

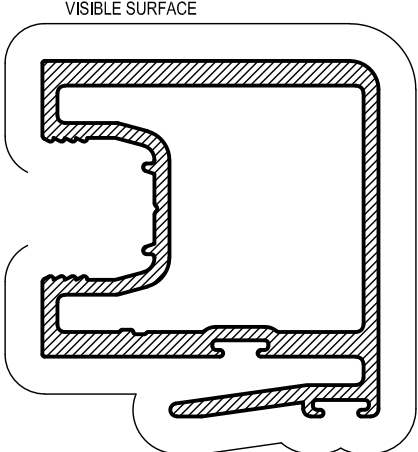


AD825
STD INTERLOCK
STILE (18mm POCKET)
Mass. 1.496 Kg/m
Anod. Per. 284
Paint Per. 175
Ixx = 153.63 x 10³ mm⁴

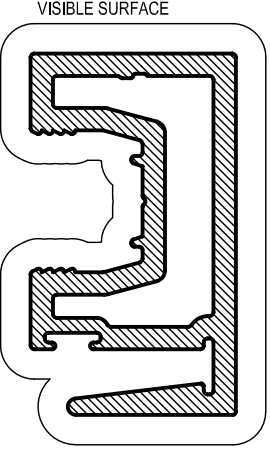


AD981
18mm POCKET
SLIM INTERLOCK
Mass. 1.456 Kg/m
Anod. Per. 236
Paint Per. 236
Ixx = 39.38 x 10³ mm⁴

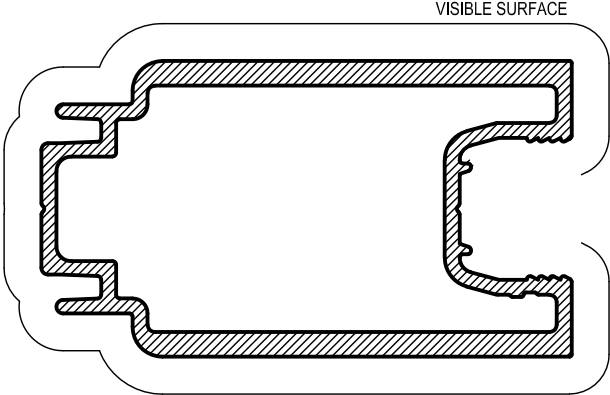


AD913
MALE OXO MEETING
STILE (18mm POCKET)
Mass. 1.737 Kg/m
Anod. Per. 272
Paint Per. 198
Ixx = 152.16 x 10³ mm⁴

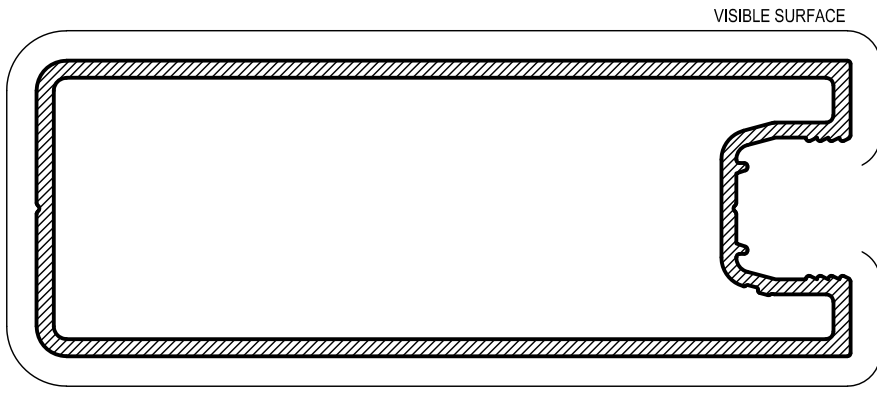


AD842
109mm WIDE STILE (18mm POCKET)
Mass. 1.924 Kg/m
Anod. Per. 329
Paint Per. 275
Ixx = 194.82 x 10³ mm⁴

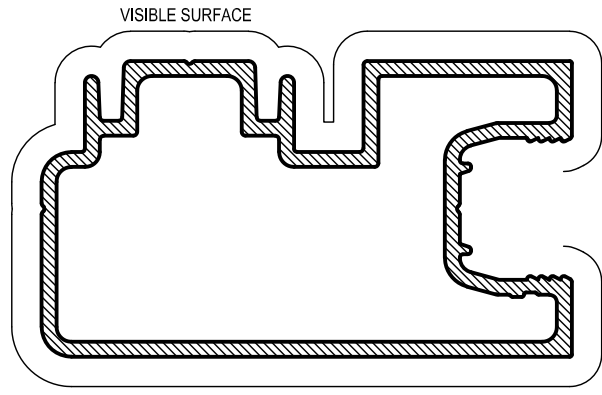


AD770
90° CNR MEETING
STILE (18mm POCKET)
Mass. 1.491 Kg/m
Anod. Per. 296
Paint Per. 245
Ixx = 118.29 x 10³ mm⁴

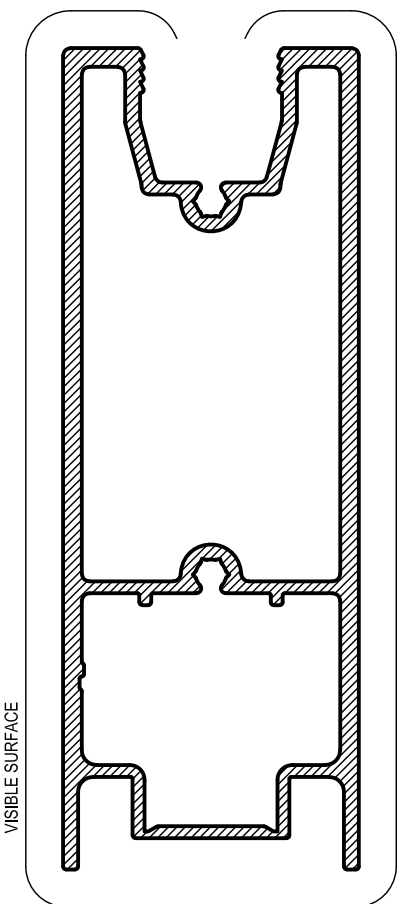


AD912
110mm SQUARE RAIL
(18mm POCKET)
Mass. 2.309 Kg/m
Anod. Per. 382
Paint Per. 243

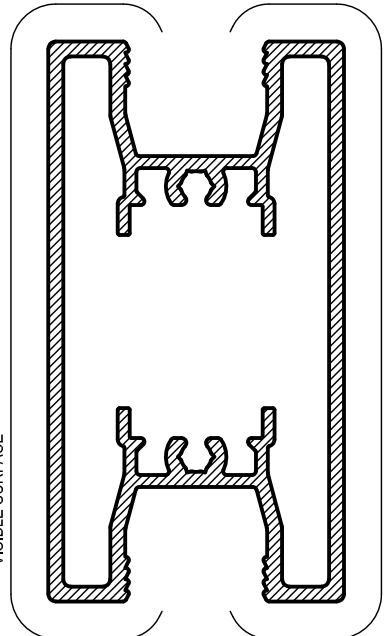


AD911
75mm MIDRAIL
(18mm POCKET)
Mass. 1.778 Kg/m
Anod. Per. 290
Paint Per. 193

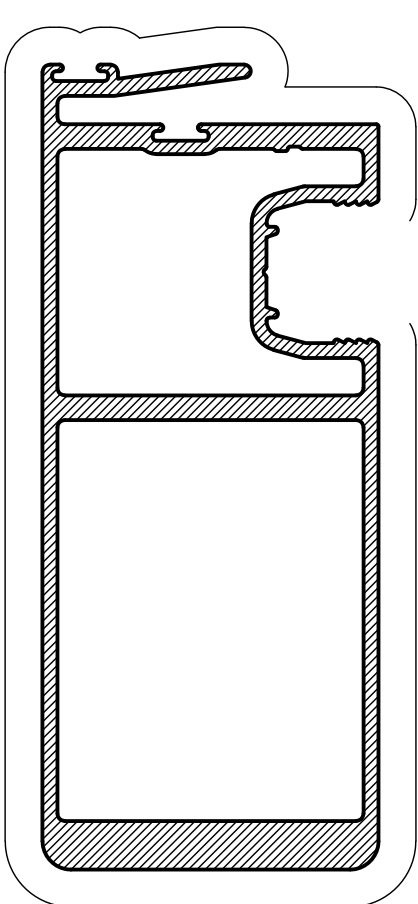


AD823
H.D INTERLOCK STILE
(18mm POCKET)
Mass. 2.865 Kg/m
Anod. Per. 403
Paint Per. 293
Ixx = 1498.38 x 10³ mm⁴

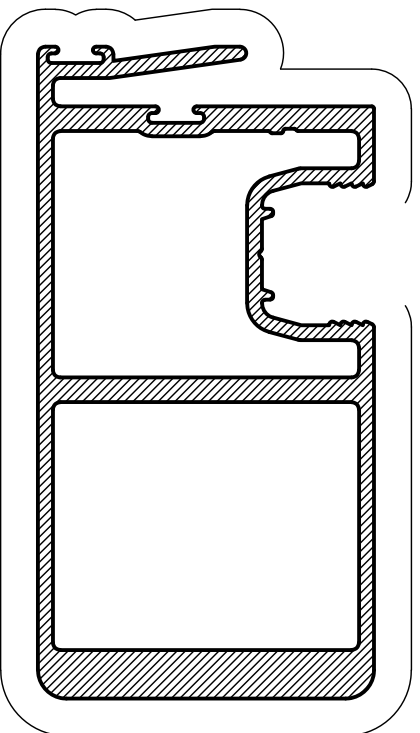


AD822
MED INTERLOCK STILE
(18mm POCKET)
Mass. 2.643 Kg/m
Anod. Per. 362
Paint Per. 252
Ixx = 875.49 x 10³ mm⁴

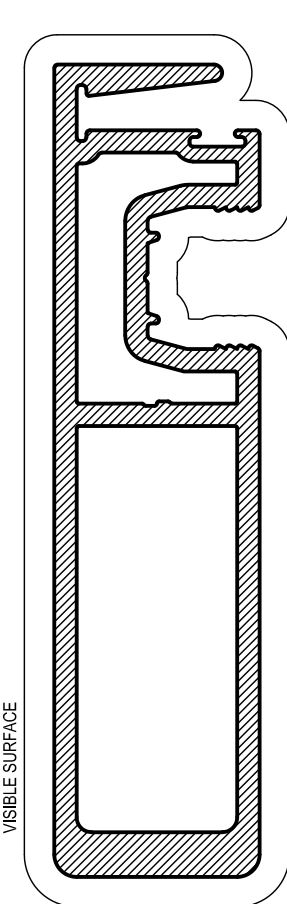


AD984
18mm POCKET SLIM
INTERLOCK HEAVY DUTY
Mass. 2.776 Kg/m
Anod. Per. 354
Paint Per. 295
Ixx = 99.41 x 10³ mm⁴

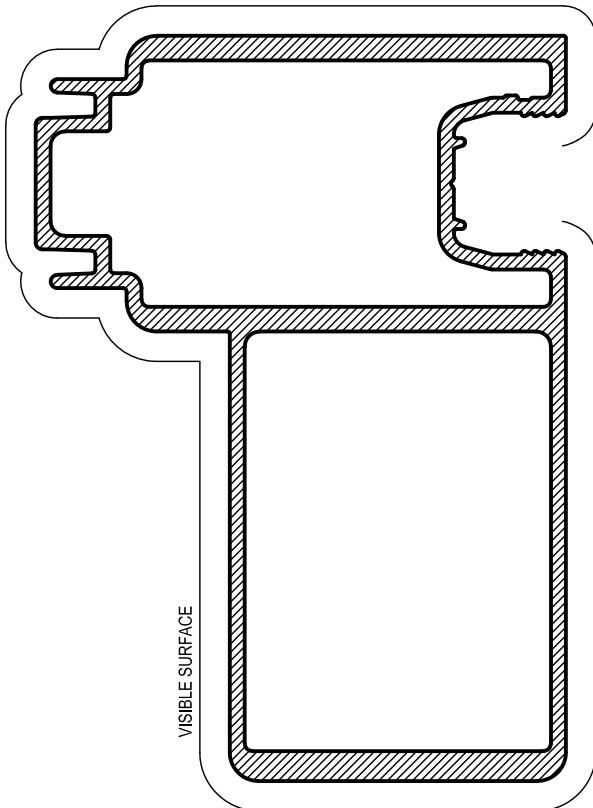


AD776
HD OXO MALE MEETING
STILE (18mm POCKET)
Mass. 2.825 Kg/m
Anod. Per. 389
Paint Per. 338
Ixx = 1216.36 x 10³ mm⁴

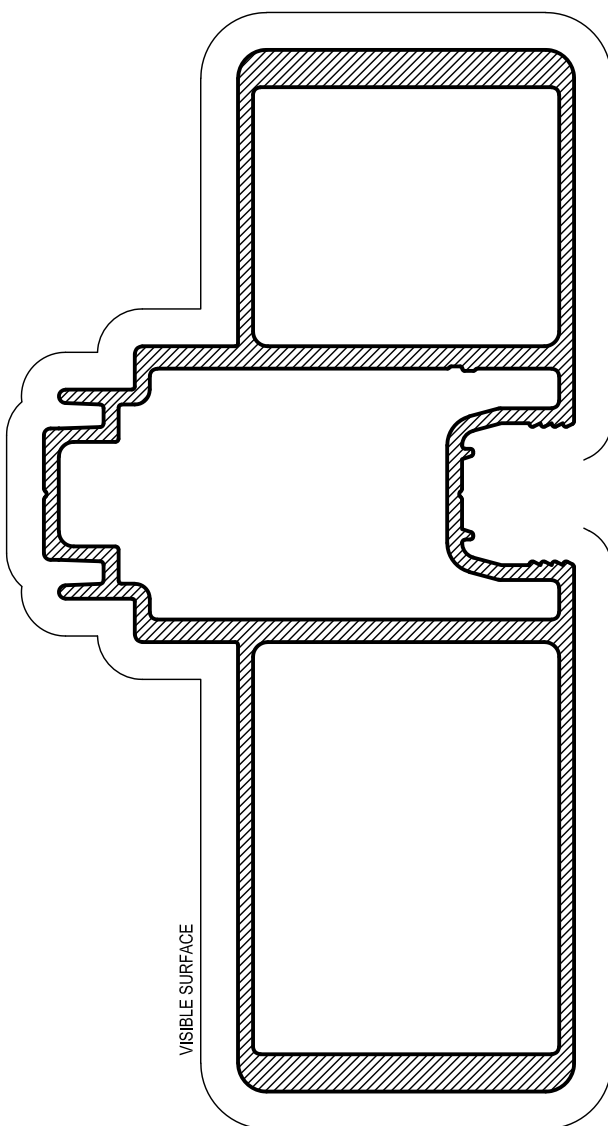


AD870
XHD MALE MEETING
STILE (18mm POCKET)
Mass. 3.838 Kg/m
Anod. Per. 468
Paint Per. 416
Ixx = 2863.45 x 10³ mm⁴

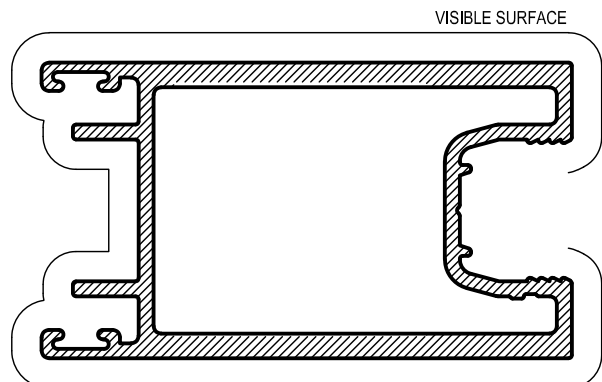


AD766
FEMALE MEETING STILE (18mm POCKET)
Mass. 1.810 Kg/m
Anod. Per. 337
Paint Per. 285
Ixx = 168.01 x 10³ mm⁴

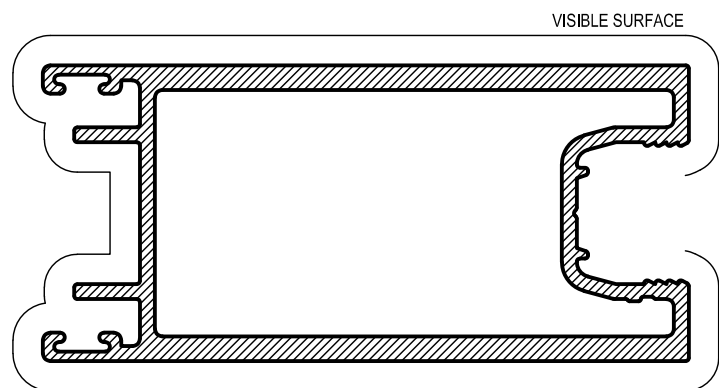

AD927
WIDE FEMALE MEETING
STILE SG (18mm POCKET)
Mass. 2.087 Kg/m
Anod. Per. 368
Paint Per. 236
Ixx = 201.87 x 10³ mm⁴

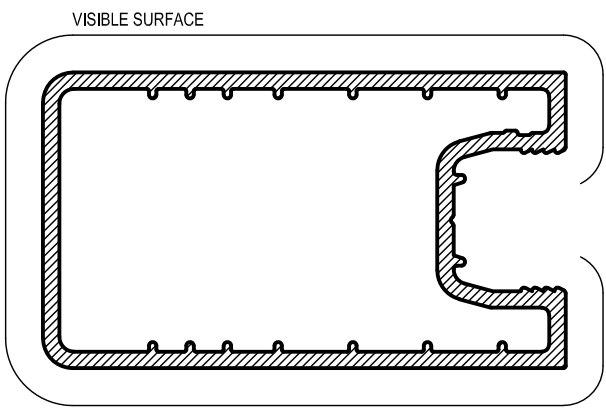


AD922
70mm LOCK STILE
(18mm POCKET)
Mass. 1.462 Kg/m
Anod. Per. 250
Paint Per. 197
Ixx = 133.56 x 10³ mm⁴

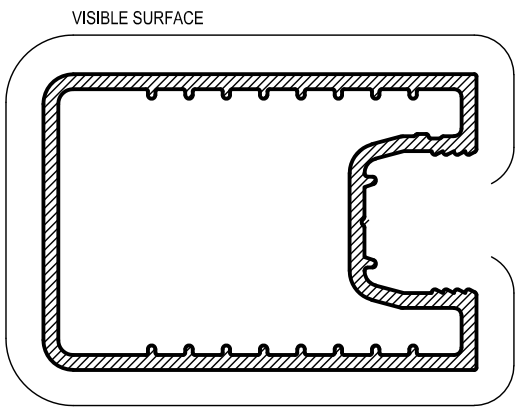


AD824
STD LOCK STILE
(18mm POCKET)
Mass. 1.214 Kg/m
Anod. Per. 226
Paint Per. 173
Ixx = 107.06 x 10³ mm⁴

DOUBLE GLAZED - 33.5mm POCKET

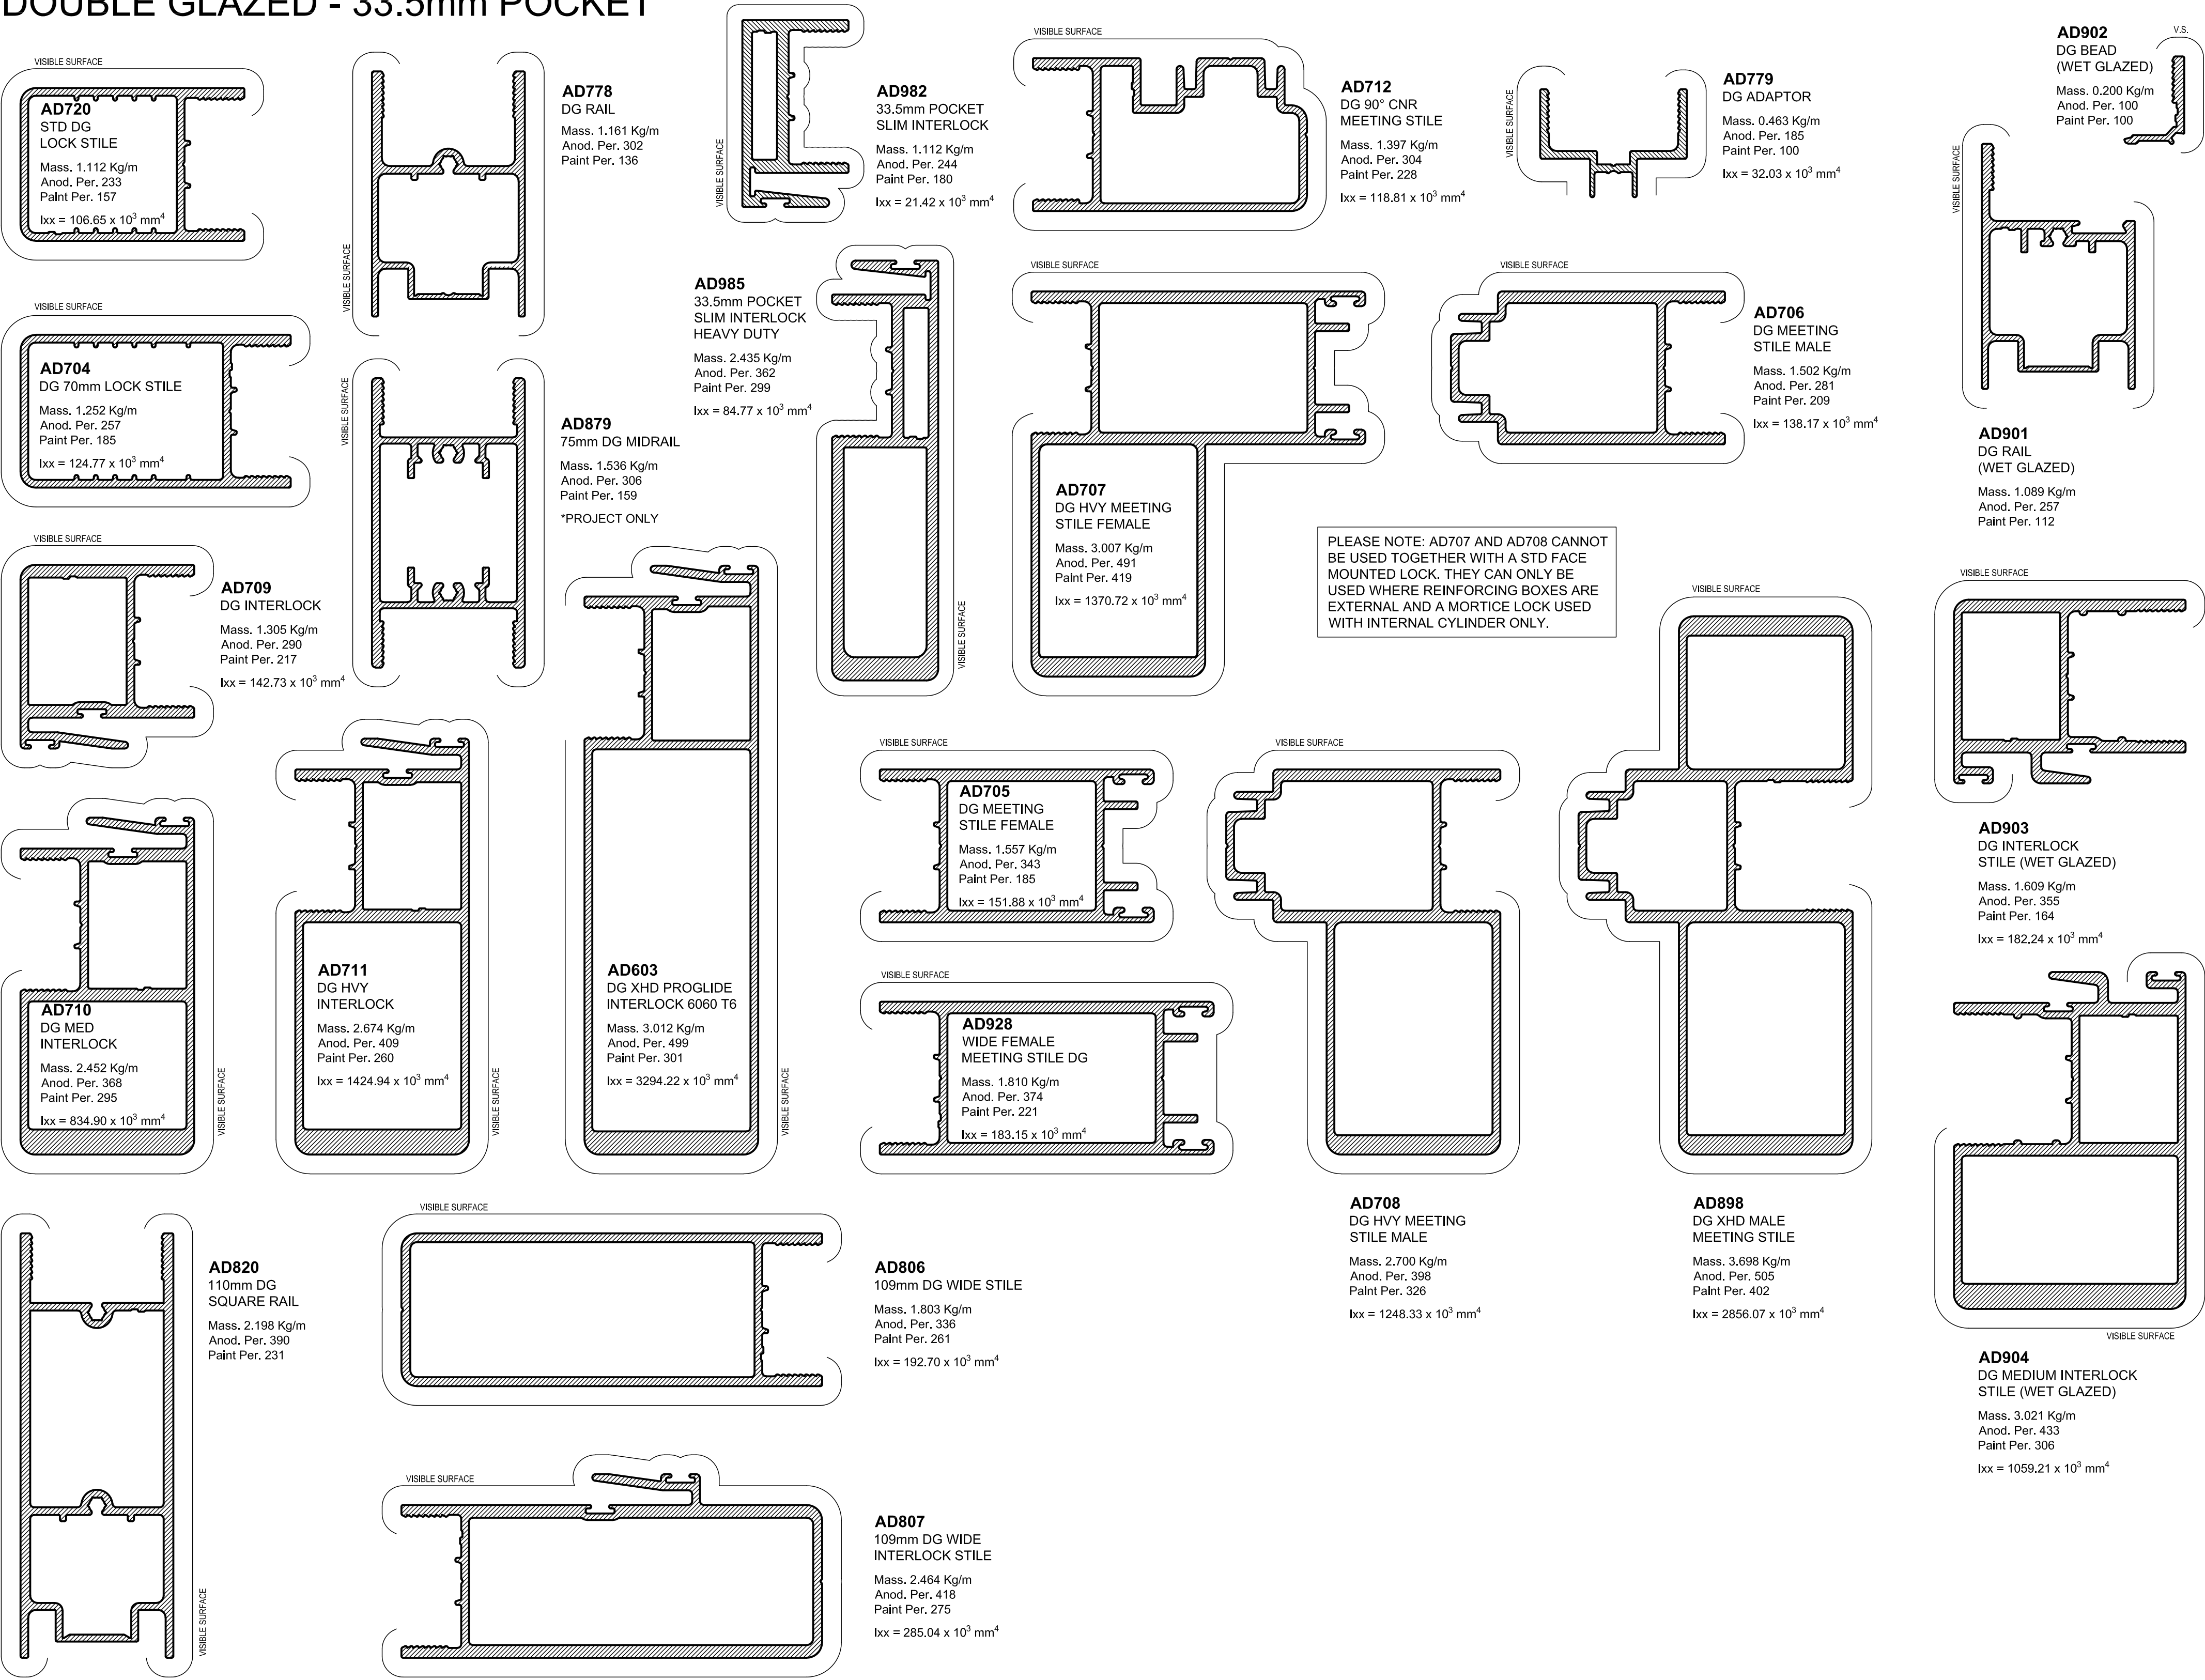

ON SITE GLAZED DG - 30mm POCKET

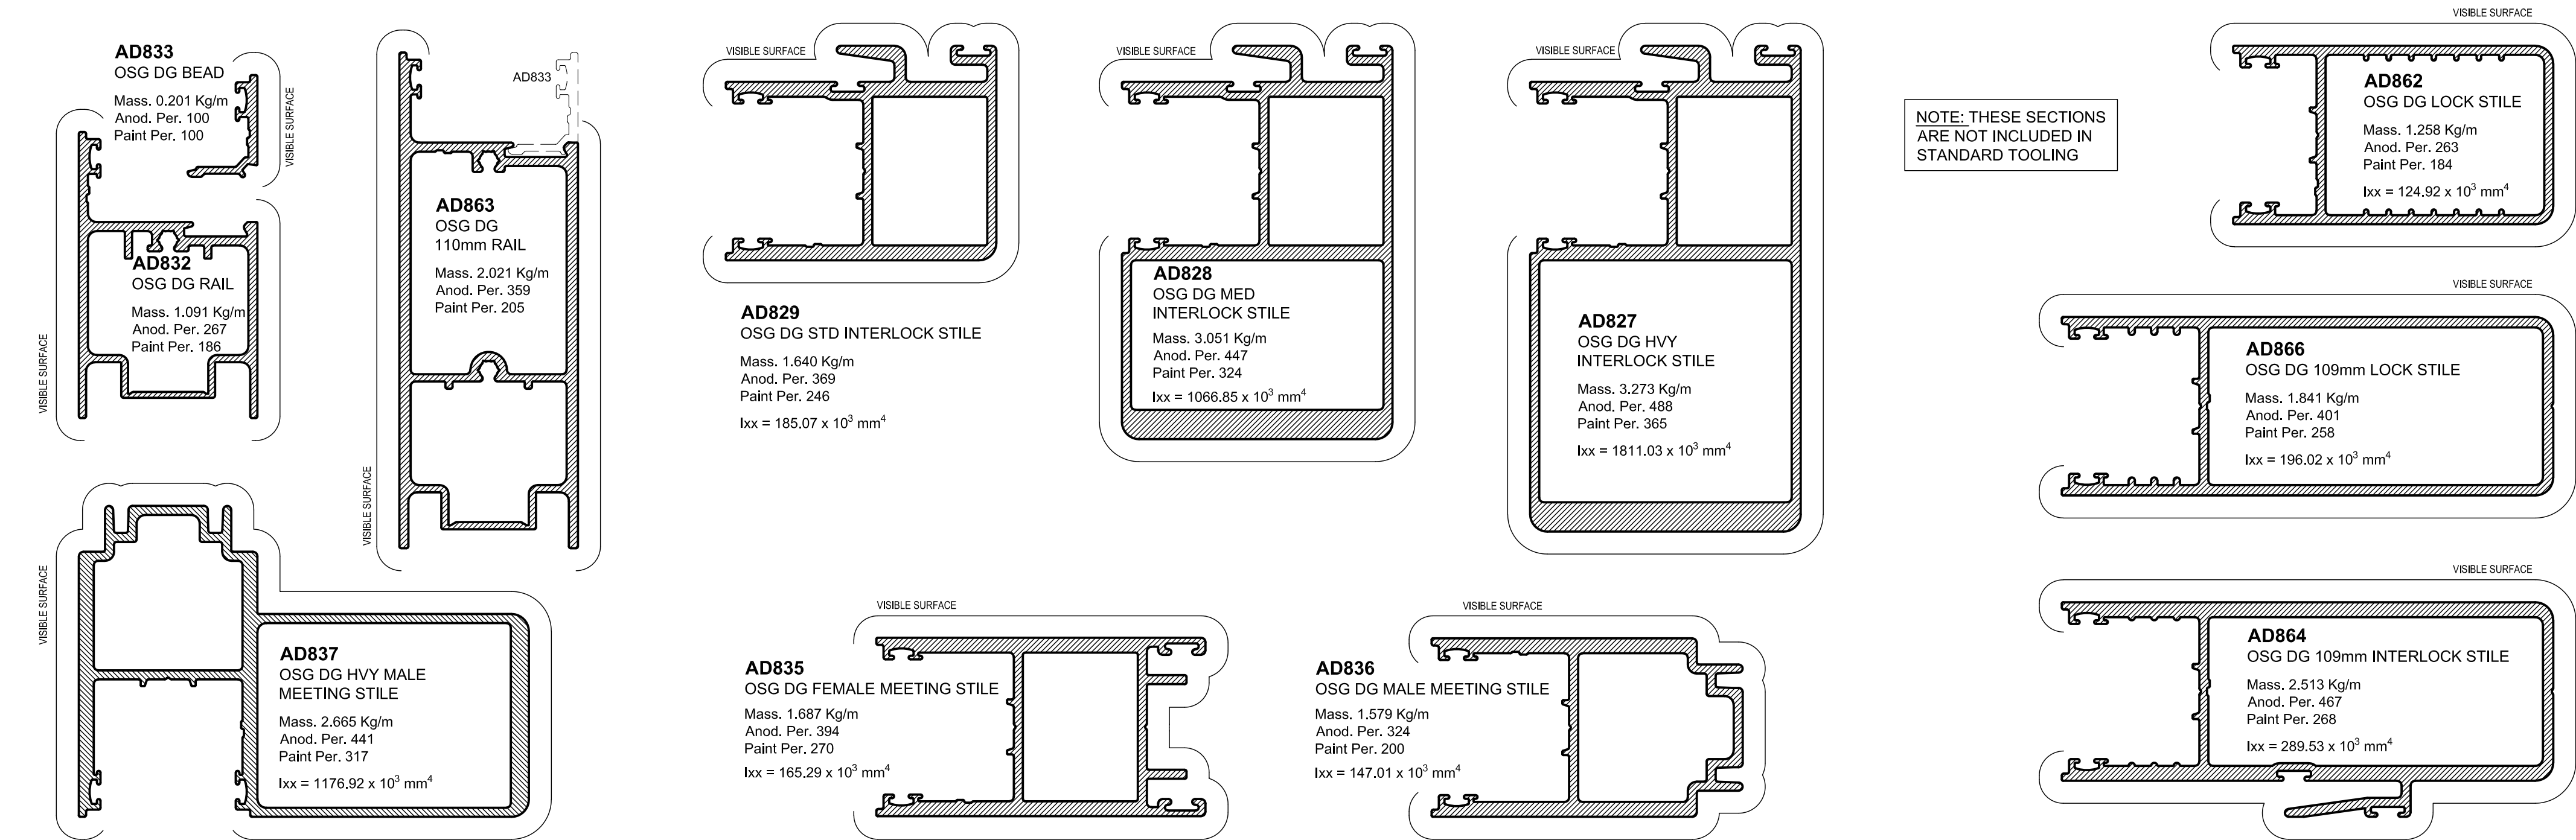

HD10
EXTENDED 7mm
OFFSET INTERLOCK
Mass. 0.118Kg/m
Anod. Per. 100
Paint Per. 100

HD22
HEAVY DUTY
STEPPED INTERLOCK
Mass. 0.306Kg/m
Anod. Per. 100
Paint Per. 100

HD28
HEAVY DUTY
DEEP INTERLOCK
Mass. 0.323Kg/m
Anod. Per. 100
Paint Per. 100

AS320
INFILL
Mass. 0.201 Kg/m
Anod. Per. 100
Paint Per. 100

AD759
SCREEN DOOR
ADAPTOR JAMB
Mass. 0.831 Kg/m
Anod. Per. 310
Paint Per. 199

AD760
SCREEN DOOR
ADAPTOR HEAD
Mass. 0.806 Kg/m
Anod. Per. 301
Paint Per. 189

AD761
SCREEN DOOR
ADAPTOR SILL
Mass. 0.831Kg/m
Anod. Per. 305
Paint Per. 118

ST9
RECEIVER
CHANNEL
Mass. 0.244 Kg/m
Anod. Per. 133
Paint Per. 133

AD787
SCREEN HEAD
ADAPTOR
Mass. 0.493 Kg/m
Anod. Per. 259
Paint Per. 140

AD788
SCREEN SILL
ADAPTOR
Mass. 0.620 Kg/m
Anod. Per. 294
Paint Per. 118

AD789
SCREEN JAMB
ADAPTOR
Mass. 0.402 Kg/m
Anod. Per. 214
Paint Per. 107

PRG018
36mm SS STORM
GRATE 1000mm

ASGR8
SLOTTED GRATE
THRESHOLD
Mass. 0.364 Kg/m
Anod. Per. 105
Paint Per. 100
PREPUNCHED AND
CLEAR ANODISED

AD738S
OXXX SUB SILL EXTENSION
Mass. 1.121 Kg/m
Anod. Per. 419
Paint Per. 100

AD739S
OXXXX SUB SILL EXTENSION
Mass. 1.432 Kg/m
Anod. Per. 526
Paint Per. 100

AD737S
STACK SUB SILL BASE
Mass. 1.542 Kg/m
Anod. Per. 132
Paint Per. 100

AD964
FLUSH GRATE SILL
ADAPTOR
Mass. 0.392 Kg/m
Anod. Per. 118
Paint Per. 100

AD965
100mm FLUSH
GRATE SILL
Mass. 1.936 Kg/m
Anod. Per. 643
Paint Per. 265

AD966
150mm FLUSH
GRATE SILL
Mass. 2.216 Kg/m
Anod. Per. 745
Paint Per. 265

AD962
FLUSH GRATE SILL
Mass. 2.446 Kg/m
Anod. Per. 799
Paint Per. 301

AD963
FLUSH GRATE SILL
EXTENSION (3 / 4 TRACK)
Mass. 1.274 Kg/m
Anod. Per. 385.3
Paint Per. 103

AD802
FLUSH GRATE
SILL ADAPTOR
Mass. 0.437 kg/m
Anod. Per. 132
Paint Per. 115

AD808
100mm FLUSH GRATE SILL
Mass. 2.578 kg/m
Anod. Per. 740
Paint Per. 293

AD809
150mm FLUSH
GRATE SILL
Mass. 2.983 kg/m
Anod. Per. 840
Paint Per. 293

AD936S
PROGLIDE ULTRAFLAT 70mm
2 TRACK FLUSH GRATE
SUBSILL - SLOTTED
Mass. 3.480 Kg/m
Anod. Per. 979
Paint Per. 456

VPS024
FLUSH GRATE SILL
ADAPTOR
Mass. 0.579 Kg/m
Anod. Per. 172
Paint Per. 100

AD938S
PROGLIDE ULTRAFLAT 50mm
2 TRACK FLUSH GRATE
SUBSILL - SLOTTED
Mass. 3.041 Kg/m
Anod. Per. 879
Paint Per. 452

AD939S
PROGLIDE ULTRAFLAT 50mm
3 TRACK FLUSH GRATE
SUBSILL - SLOTTED
Mass. 3.450 Kg/m
Anod. Per. 980
Paint Per. 452

ASGR75S
75mm SLOTTED GRATE
THRESHOLD
Mass. 0.974 Kg/m
Anod. Per. 182
Paint Per. 100

AD961
FLUSH GRATE
SILL EXTENSION
Mass. 1.353 Kg/m
Anod. Per. 410
Paint Per. 100

AD971
FLUSH GRATE DRAIN
EXTENSION TO SUIT
AD965 & AD966
Mass. 1.352 Kg/m
Anod. Per. 404
Paint Per. 245

AD972
FLUSH GRATE DRAIN
EXTENSION TO SUIT
AD808 & AD809
Mass. 1.742 Kg/m
Anod. Per. 511
Paint Per. 340

**NOTE: AD808 IS NOT PRESLOTTED.
WHEN SELECTING AD808 A TWO PIECE
SUB HEAD MUST BE USED**

**NOTE: AD809 IS NOT PRESLOTTED.
WHEN SELECTING AD808 A TWO PIECE
SUB HEAD MUST BE USED**

BOX RADIUS
19.05 x 1.7mm
Mass. 0.315 Kg/m
Anod. Per. 100
Paint Per. 100