



Hunter Evo

Single Flush Glazed Framing

SUITABLE FOR A RANGE OF SINGLE
GLAZED GLASS THICKNESS OPTIONS.

1300 ALSPEC (1300 257 732)

alspec.com.au

alspec
ALUMINIUM SYSTEMS
SPECIALISTS

Single Flush Glazed Framing


The Hunter Evo Single Flush Glazed Framing is the most versatile and flexible of the Alspec Commercial Framing Systems. Available in a frame depth of 101.6mm x 50mm and 150mm x 50mm, it is ideal for shopfronts.

With its straight cuts and flush glazing the Hunter Evo not only looks good, but is easy to fabricate and easy to install. Suitable for a range of single glazed glass thickness options to address the most demanding energy requirements.


With self draining sub sills it also solves water leakage problems. The system can be internally or externally glazed along with incorporating the flexibility and appeal of gently curved or faceted frame installations. The Hunter Evo also provides a seamless interface with Alspec's extensive product offer.

Typical Configurations

101.6mm

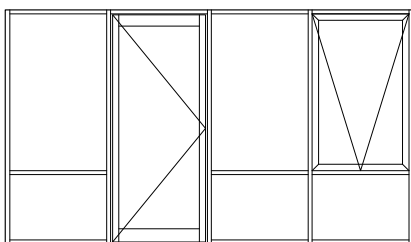

150mm

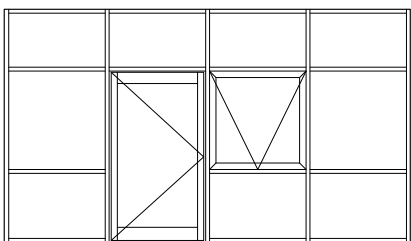

CAD Cross Sections



Key Features

- Sharp unbroken lines
- Flush glazed appearance
- Robust frame
- Good weathering
- 4mm – 14mm single glazed
- Easily adapts to Alspec's awnings and hinged doors

Technical Specifications

Frame Dimensions		
Option 1	101.6 x 50mm	
Option 2	150 x 50mm	
Maximum Recommended Sizes		
	101.6mm Frame	150mm Frame
Height	4200mm	4500mm
Width	2400mm	2400mm
Maximum Product Performance		
	101.6mm Frame	150mm Frame
SLS (Pa)	3500	6000
ULS (Pa)	8900	9000
Water (Pa)	1200	1000
Acoustic Performance		
Glass Type	Rw (C; C _{tr})	
6.38mm Laminated	33 (-1,-3) dB	
Glazing Details		
Glass Position	Front	
Single Glazed	4 - 14mm	
Thermal Performance		
	101.6mm Frame	150mm Frame
Uw range DG	4.2 - 6.5	4.5 - 6.5
SHGC range DG	0.24 - 0.73	0.24 - 0.74
Cyclonic Performance		
	101.6mm Frame	150mm Frame
Glass Type	12.4 mm Gen II	12.4 mm Gen II
Speed (m/sec)	38	38
Glass Type	14.08mm Ultra Forza	12.84mm Ultra Forza
Speed (m/sec)	38	39
Compatible Systems		
Swan Evo 45mm Commercial Shopfront Door		
Torrens 45mm Commercial Shopfront Door		
35/50mm Awning Window		
ProTilt High Performance Awning/Casement		
ProGlide High Performance Sliding Door		
Altitude Apartment Sliding Door		

